



STANDARD WINDOW RANGE

Betcrete Innovative windows.

The STANDARD WINDOW RANGE is used in most Residential, Commercial and Industrial applications.

Betcrete Window consist of the Betcrete Polycrete Outerframe and the Aluminium insert.
These windows come in a wide Range of sizes, aluminium colour and glass types.

INDEX with page numbers

PAGE 1/8



Standard Windows Sizes

2—3



Window Installation

4-5



Technical Information

6—8




600 STANDARD RANGE (WIDTH 590mm)

PAGE 2/8


BT66
590 x 590




BT69
590 x 890



BTT612
590 x 1190



BTT615
590 x 1490




900 STANDARD RANGE (WIDTH 890mm)


BT99
890 x 890




BT99
890 x 890



BTT912
890 x 1190




BTT915
890 x 1490




1200 STANDARD RANGE (WIDTH 1190mm)


BTT126
1190 x 590




BT126
1190 x 590




BTT129
1190 x 890




BTT1212
1190 x 1190



BT4T1212
1190 x 1190




BTT1212L
1190 x 1190




LEFT or RIGHT

BTT1215L
1190 x 1490



LEFT or RIGHT

BTT1215T
1190 x 1490




TOP or BOTTOM




1500 STANDARD RANGE (WIDTH 1490mm)

PAGE 3/8


BTT156
1490 x 590



BTT159
1490 x 890




BTT1512L
1490 x 1190



LEFT or RIGHT


BTT1512T
1490 x 1190

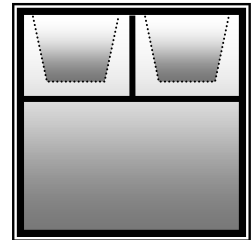


TOP or BOTTOM

1800 STANDARD RANGE (WIDTH 1790mm)


BT3T186
1790 x 590

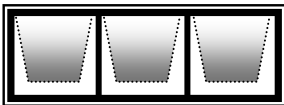

BT3T189
1790 x 890

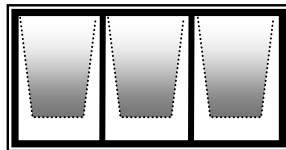


BTT1812L
1790 x 1190

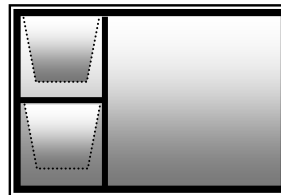

LEFT or RIGHT

BTT1815L
1790 x 1490

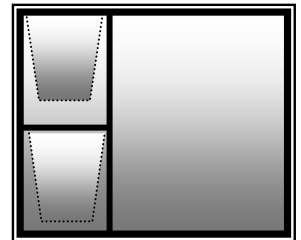

LEFT or RIGHT

OTHER COMBINATIONS & SIZES AVAILABLE ON REQUEST

Betcrete Promise to our Client

Please send your request to us and
we will help you with the best combinations & sizes to suit your needs.

WE REGARD EACH CLIENT AS IMPORTANT,
no matter how big or small your needs.




WINDOW INSTALLATION

PAGE 4/8

Betcrete Polycrete Window frame is standardly build into the wet phase of the Building proses.


Window can also be epoxied in afterwards. Correct opening size is important for fitting.

STANDARD WINDOWFRAME WITH or WIHTOUT BETCRETE SILL

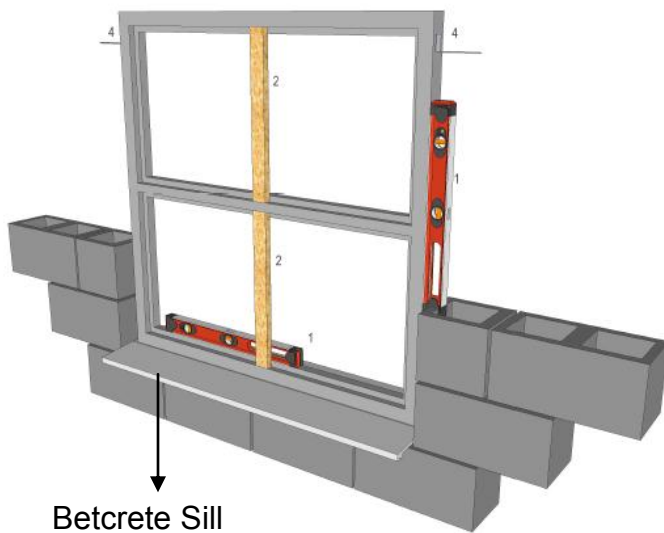

Betcrete Sill

1. Window sill is fitted on top of the brickwork and the window on top of the sill.
Check and ensure the vertical and horizontal to be level during the wet building phase
2. Use temporary wooden support
3. If no Betcrete Sill is used, wedge the bottom opening (for support)
4. Lugs: bend outward and build between the bricks (for further support)

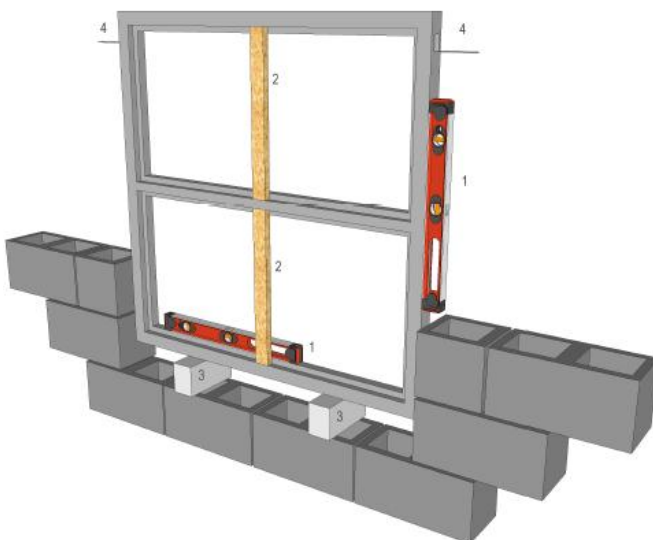




WINDOW INSTALLATION FITMENT

PAGE 5/8


Betcrete Polycrete Window frames can be used on
140 Block, 230 Wall and 280 Cavity Wall.

140 Block

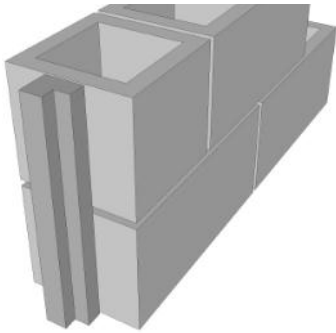



Betcrete Window is fitted to the centre of
the 140 Block

230 Double Wall

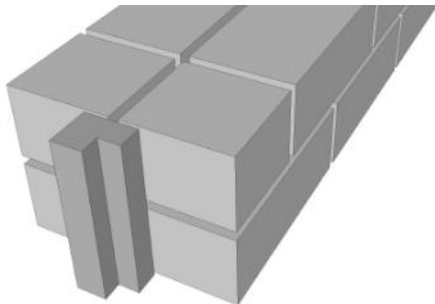

Betcrete Window is fitted in the middle of
the 230 double wall

280 Cavity Wall

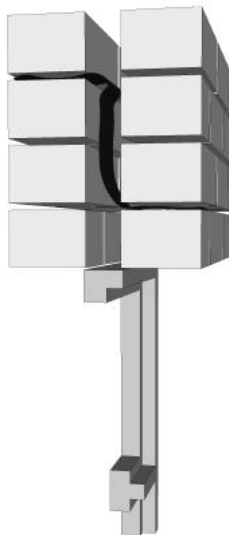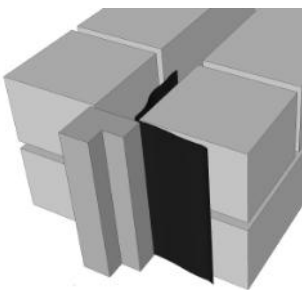


Betcrete Window is fitted over the cavity
on the 280 Cavity Wall

DPC fitment on drawings




TECHNICAL INFORMATION : STANDARD WINDOW PROFILE

PAGE 6/8

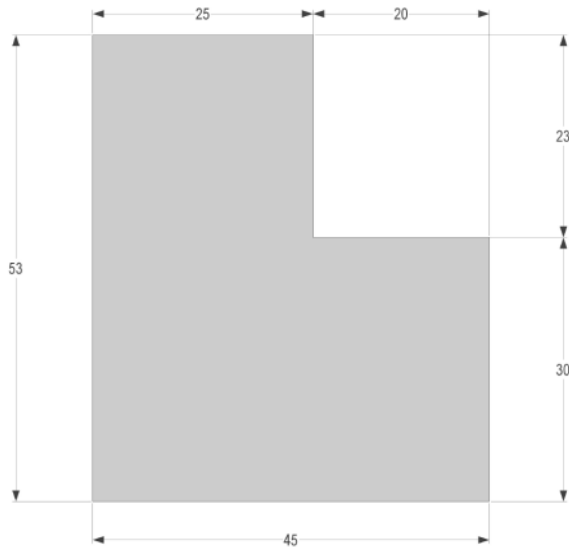

SIDE VIEW : STANDARD CENTRE WINDOW

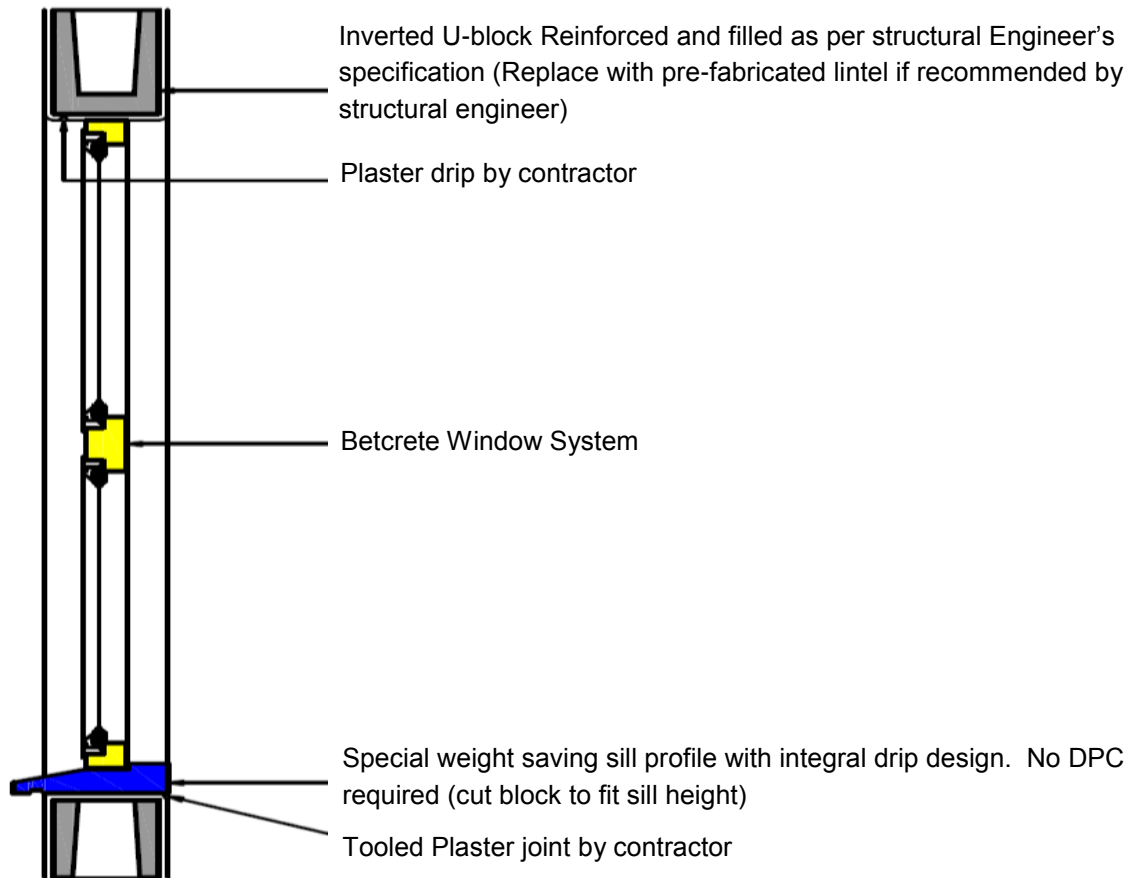



Betcrete Aluminium insert is made to fit exactly into the Polycrete Window outerframe.

Aluminium Beadingless Profile

30.5mm Casement

GLASS



Betcrete is a member of the AAAMSA group and adhere to SAGGA regulation:

- Max 0.75m^2 = 3mm Glass
- Max 1.50m^2 = 4mm Glass
- Max 2.10m^2 = 5mm Glass
- Max 3.20m^2 = 6mm Glass
- Safety glass when lower than 500mm from ground
Read more on AAAMSA website
- Betcrete Safety Glass - Marked with **B**Ⓢ

We also supply Obscure glass for Bathrooms

On request we can supply Double Glazing: Excellent sound, weather and energy saving ability



TECHNICAL INFORMATION - SEALERS

PAGE 8/8



Betcrete uses a Double sealing system (Woolpile and Finseal) for the best weather & dust sealing.

HINGES



Betcrete uses a Galvanized 4-Bar Hinge on our windows

On special request we can also supply Stainless Steel (recommended in high rust areas)

Also Friction stays (used in side hung windows or if requested)

HANDLES & CATCHES



Betcrete uses a Special extruded Lockable Handle and Catch.

Lockable Handle for High Safety: Handle is set straight as if closed and grub screw is tightened.