

106-15

Bib tap

Hot & cold indices included. 1/2" BSP male inlet

[SANS 226 TYPE 1](#)



Includes

- * Bib tap

Specific features and benefits

- * 1/2" heavy pattern low resistance for low pressure or high water demand installations
- * With flow straightener for flow aesthetics
- * Chrome plated

Spare parts


- * Head part complete **P-5**
- * 1/2" heavy pattern tap washer **C-097-15**




Weight

483gr

Line drawing

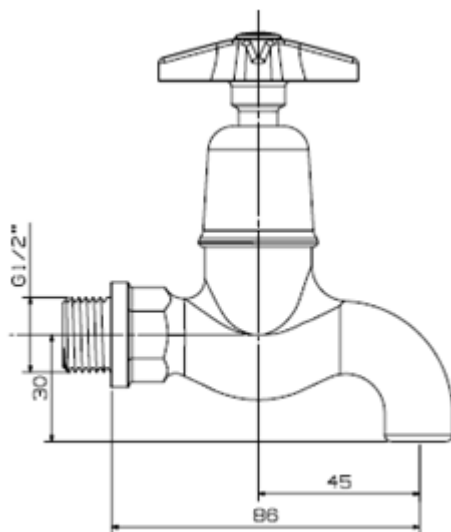

Flow rates

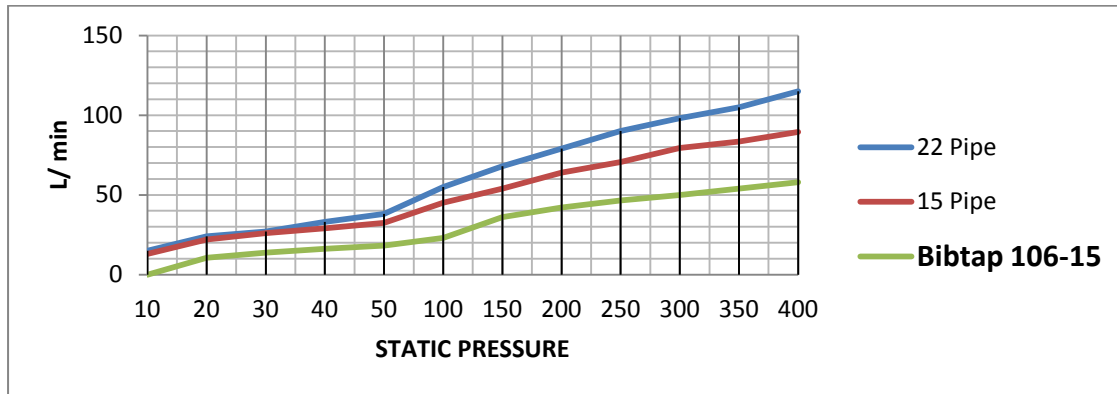

Note:

The Cobra R&D test facility (internal testing parameters) was tested with various static pressures. The following flow readings were taken.

- 1) With a Ø22mm x 1 meter long class "0" pipe with open end
- 2) With a Ø15mm x 1 meter long class "0" pipe with open end

SANS regulations

SANS226: 2009 (Type1) (** specific extracts from the applicable SANS specifications and regulations to which such products will have to adhere to, to bear the SABS approved mark)

Design:

The "Class 1 tap" shall be designed to operate on a static water supply pressure of up to 2,000kPa.

Flow rates:

Table 1 — Flow rates for taps

1	2	3	4	5
Class of tap	Dynamic supply pressure kPa	Nominal size mm		
		15	20	25
		Flow rate L/m		
1	10 ⁺¹ ₀	9	15	23
2	50 ⁺⁵ ₀	9	18	25
3	50 ⁺⁵ ₀	7-11	20-30	N/A
4	< 900	7-9	N/A	N/A

Amdt 1