

3328ST-15

Stop tap

Undertile with 1/2"BSP female inlets



[SANS 226 TYPE 2](#)

Includes

- * Stop tap complete
- * Sliding wall flange
- * Extra indice with temperature indicator

Description: Undertile stop tap. 1/2"BSP female connection end. [SANS 226, Type 2](#)

Code: 3328ST-15

Specific features and benefits

- * Chrome plated

Spare parts


- * Head part complete **P-63-2ST**
- * Handle **C-HA29X1**
- * 1/2" light pattern tap washer **C-098-15**
- * Sliding wall flange **C-FL30X1**



Weight

314gr

Line drawing

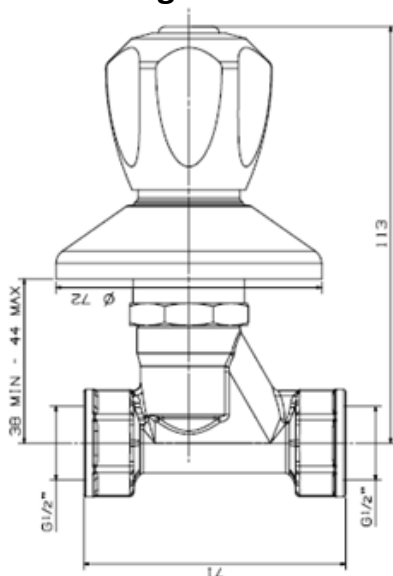

Flow rates

Note:

The R&D test facility was tested with various static pressures. The following flow readings were taken.

- 1) With a $\varnothing 22\text{mm}$ x 1 meter long class "0" pipe with open end
- 2) With a $\varnothing 15\text{mm}$ x 1 meter long class "0" pipe with open end

Static Pressure	22mm Pipe	15mm Pipe	Static Pressure	22mm Pipe	15mm Pipe
10 kPa	15 l/min	13 l/min	150 kPa	68 l/min	54 l/min
20 kPa	24 l/min	22 l/min	200 kPa	79 l/min	64 l/min
30 kPa	27 l/min	26 l/min	250 kPa	90 l/min	70.5 l/min
40 kPa	33 l/min	29 l/min	300 kPa	98 l/min	79.5 l/min
50 kPa	38 l/min	32.5 l/min	350 kPa	105 l/min	83.5 l/min
100 kPa	55 l/min	45 l/min	400 kPa	115 l/min	89.5 l/min

