

INDEX

HOSPITAL PRODUCTS	1 - 18
EC Combination Bedpan & Wash-up Sink	3
EL Bedpan Sluice Sink	4
Fixing Options For EC & EL Units	5
BBR Bedpan & Bottle Rack	5
CH Slop Hopper	6
CHBC Slop Hopper Basin Combination	7
DSBC Drip Sink Basin Combination	8
LDS Drip Sink / Cleaner Sink	9
DSG Drip Sink / Cleaner Sink	10
SSW Hospital Surgeon Scrub Up Unit	11
SSF Hospital Surgeon Scrub Up Unit	12
Combi Ward Basin	12
SMS Surgeon Mini Scrub Up Unit	13
PP Plaster Of Paris Preparation	14
Fixing Options For Plaster Of Paris Sinks	14
MSS Medical Single Bowl Sink	15
MSD Medical Double Bowl Sink	15
CBDT Baby Bath (Inset Type)	16
CB Baby Bath	17
Fixing Options For Baby Baths	17
Stainless Steel Bath	18

INDEX

MORTUARY PRODUCTS	21 - 29
Model KZ Autopsy Table	21
Ventilated Disection Table with Docking Trolley	22
MTS Post Mortem Table	23
MT Post Mortem Table	23
Modular Body Racks	24
Body Trays	25
Autopsy Transport Trolleys	26 - 27
Instrument Cabinet	28
Writing Desk	28
Supplied Mortuary Projects	29
DEKO INSTRUMENT DISINFECTORS	30
DEKO 260 Washer Disinfector	30
DEKO 25 Washer Disinfector	30
GENERAL PRODUCTS	31 - 32
Z-Series Shelving	31
Fastrack Modular Shelving	32

FRANKE HOSPITAL PRODUCTS

SLOP HOPPERS, DRIP SINKS, BOTTLE RACKS, BED PAN WASH-UPS, SURGEON SCRUB UP UNITS, PLASTER OF PARIS SINKS, BATHS

Franke is a leading supplier of sanitaryware products to hospitals, clinics and mortuaries, environments where hygiene is of the highest priority.

Franke is certified to ISO9001: 2008 quality management standards.

Our designs and construction ensure that our products meet the demands of safety, hygiene and quality.


UNCOMPROMISING WHEN IT COMES TO QUALITY, INNOVATION AND DESIGN.







IMAGE TYPE / MODEL PRODUCT CODE









EC Combination Bedpan & Wash-Up Sink

SPECIFICATION MODEL EC:

WITH FLUSH VALVE OPTION

Franke Model EC Combination Bedpan and Wash-Up Sink manufactured from grade 304 (18/10 stainless steel 1.6mm (draining board) and 1,2mm thick (bowls). Unit with a 150mm high integral splash back to the rear and 15mm deep hospital bead 100mm apron to front and sides. The unit is fitted with two pressed seamless bowls with the sluice bowl having an integral flushing rim and a 38mm diameter inlet pipe for the flush valve. The waste outlet on sluice bowl is a 110mm and the rinse bowl size 610x460x230mm deep with a 40mm waste discharging into sluice bowl. The underside sprayed with vermin proof bitumastic sound deadening and has a galvanised mild steel backing sheet. Unit supplied complete with factory fitted Cobra FM 1.00 flush valve, 35mm water supply through 50mm sleeve on unit, CP171/041 pillar mixer with over-arm swivel spout, CP297 pillar mixer with retractable hand spray, 15mm bedpan spray nozzle, 15mm bottle spray nozzle (both nozzles activated by two 15mm quarter turn elbow action valves).

Please refer to fixing table for fixing options (Pg5).

WITH HIGH LEVEL CISTERN OPTION

Franke Model EC Combination Bedpan and Wash-Up Sink manufactured from grade 304 (18/10 stainless steel 1.6mm (draining board) and 1,2mm thick (bowls). Unit with a 150mm high integral splash back to the rear and 15mm deep hospital bead 100mm apron to front and sides. The unit is fitted with two pressed seamless bowls with the sluice bowl having an integral flushing rim and a 38mm diameter inlet pipe for the flush valve. The waste outlet on sluice bowl is a 110mm and the rinse bowl size 610x460x230mm deep with a 40mm waste discharging into sluice bowl. The underside sprayed with vermin proof bitumastic sound deadening and has a galvanised mild steel backing sheet. Unit supplied complete with 11 litres stainless steel high level cistern fitted with Supa Flush Valve and pull chain, 41mm diameter stainless steel flush pipe and 41 chrome plated coupling which is reduced on one end to fit the 38mm connection on the unit.

Please refer to fixing table for fixing options (Pg5).

- Grade 304 (18/10) Stainless Steel 1.6mm gauge on drainer and 1,2mm gauge on bowls
- Hygienic and durable
- Pressed seamless bowls designed for the highest level of hygiene and durability
- Unit is pre-plumbed at factory and can be supplied complete with fittings
- 57 Litres pressed rinse bowl
- Sluice bowl with built in Flush rim mechanism with 110mm outlet
- Alternative fixing methods (Please refer to fixing table)

MODEL	DIMENSIONS	BOWL POSITION	FLUSH SYSTEM	PRODUCT CODE
EC6	1830x685 mm	Left Hand	Flush Valve	2630001
EC6	1830x685 mm	Right Hand	Flush Valve	2630002
EC6	1830x685 mm	Right Hand	High Level Cistern	2630003
EC6	1830x685 mm	Left Hand	High Level Cistern	2630004
EC7	2135x685 mm	Left Hand	Flush Valve	2630005
EC7	2135x685 mm	Right Hand	Flush Valve	2630005-002
EC7	2135x685 mm	Right Hand	High Level Cistern	2630006-001
EC7	2135x685 mm	Left Hand	High Level Cistern	2630006
EC8	2440x685 mm	Left Hand	Flush Valve	2630007
EC8	2440x685 mm	Right Hand	Flush Valve	2630008
EC8	2440x685 mm	Right Hand	High Level Cistern	2630116
EC8	2440x685 mm	Left Hand	High Level Cistern	2630117

ACCESSORIES


Optional Installation Accessories:


STAINLESS STEEL "P"TRAP on request only REMOVABLE GRID (image shown on following page) 2120130

IMAGE TYPE / MODEL PRODUCT CODE



FRONT VIEW LEFT HAND BOWL





TOP VIEW LEFT HAND BOWL

EL Bedpan Sluice Sink

SPECIFICATION MODEL EL:

WITH FLUSH VALVE OPTION

Franke Model EL Sluice Sink manufactured from grade 304 (18/10 stainless steel 1.6mm (draining board) and 1,2mm thick (bowls). Unit with a 150mm high integral splash back to the rear and 15mm deep hospital bead 100mm apron to front and sides. The unit is fitted with a pressed seamless bowls sluice bowl having an inTTTh factory fitted Cobra FMI.00 flush valve, 35mm water supply through 50mm sleeve on unit, 15mm bedpan spray nozzle, 15mm bottle spray nozzle (both nozzles activated by two 15mm quarter turn elbow action valves).

Please refer to fixing table for fixing options (Pg5).

WITH HIGH LEVEL CISTERN OPTION

Franke Model EL Sluice Sink manufactured from grade 304 (18/10 stainless steel 1.6mm (draining board) and 1,2mm thick (bowls). Unit with a 150mm high integral splash back to the rear and 15mm deep hospital bead 100mm apron to front and sides. The unit is fitted with a pressed seamless bowls sluice bowl having an integral flushing rim and a 38mm diameter inlet pipe for the flush valve and the waste outlet is 110mm. The underside sprayed with vermin proof bitumastic sound deadening and has a galvanised mild steel backing sheet. Unit supplied complete with 11 litres stainless steel high level cistern fitted with Supa Flush Valve and pull chain, 41mm diameter stainless steel flush pipe and 41mm chrome plated coupling which is reduced on one end to fit the 38mm connection on the unit.

Please refer to fixing table for fixing options (Pg5).

- Grade 304 (18/10) Stainless Steel 1.6mm gauge on drainer and 1,2mm gauge on bowl
- Hygienic and durable
- Pressed seamless bowl designed for the highest level of hygiene and durability
- Unit is pre-plumbed at factory and can be supplied complete with fittings
- Sluice bowl with built in Flush rim mechanism with 110mm outlet
- Alternative fixing methods (Please refer to fixing table)

MODEL	DIMENSIONS	BOWL POSITION	FLUSH SYSTEM	PRODUCT CODE
EL	1130x685 mm	Left Hand	Flush Valve	2630011
EL	1130x685 mm	Right Hand	Flush Valve	2630012
EL	1130x685 mm	Right Hand	High Level Cistern	2630013
EL	1130x685 mm	Left Hand	High Level Cistern	2630014

ACCESSORIES

Optional Installation Accessories:

STAINLESS STEEL "P"TRAP

on request only


REMOVABLE GRID

2120130




IMAGE TYPE / MODEL PRODUCT CODE





FRONT VIEW



BBR Bedpan & Bottle Rack

HYGIENIC AND DURABLE IN VARIOUS DIMENSIONS

SPECIFICATION MODEL BBR:

Franke model BBR Bedpan and Bottle Rack designed to hold plastic and stainless steel bedpans and bottles, manufactured from grade 304 (18/10) stainless steel 8mm diameter round bars and stainless steel flat bar mounting brackets. Bottle holders to be on the front of the unit to ensure ergonomic function. Unit complete with stainless steel drip tray which can be removed for cleaning and the ends of the bottle rods are fitted with rubber grommets. Unit fixed to wall with 4 off anchor bolts (bolts specified elsewhere).


- Manufactured from Grade 304 (18/10) Stainless Steel
- Hygienic & durable
- New ergonomic design
- Available in three standard sizes
- Rubber grommets fitted to ends of bottle rods to prevent scratching of
- Removable drip tray

	DIMENSIONS (LXHXD)	NO. OF BEDPANS	BOTTLES	PRODUCT CODE
BBR2	360x505x250mm	2	3	2630138
BBR4	660x350x505mm	4	5	2630139
BBR6	960x350x505mm	6	7	2630017



GALLOWS BRACKET WITH REMOVABLE FRONT LEG

RECOMMENDED FIXING OPTION



CANTILEVER BRACKET

Fixing Options For EC & EL Units

STAINLESS STEEL GALLOWS BRACKETS WITH FRONT LEG

Gallows Brackets with Front Legs manufactured from grade 304(18/10) stainless steel 40x40mm x 1,2mm thick square tubing. The front leg is detachable and is fitted with chrome plated adjustable flanged foot pieces.

*These brackets are used in areas where the floors have coved skirting.

STAINLESS STEEL CANTILEVER BRACKETS


Cantilever Brackets manufactured from grade 304(18/10) stainless steel 40x40mm x 1,2mm thick square tubing.

*These brackets are used in areas where the floors have coved skirting and the design makes cleaning under the unit very easy.

METHODS	QTY REQUIRED	COMMENTS	PRODUCT CODE
40 X 40MM SQUARE GALLOWS BRACKET	1 pair		2120035
CANTILEVER			2120036



FLUSH VALVE NOT INCLUDED



Ø 348 540 500 63 296 540



SLOP HOPPER WITH STAINLESS STEEL "P" TRAP

CH Slop Hopper

SPECIFICATION MODEL CH:

Franke model CH Slop Hopper 540x540 manufactured from grade 304 (18/10) stainless steel 1,2mm thick with a 100mm high integral splash back to the rear and both sides. The cone must be seamless with no welding and have an integral flushing rim with a 107mm waste outlet for pan connector, the inlet is fitted with a 38x250mm long vertical flush pipe for a standard flush valve. Unit fitted with a hinged bucket grid manufactured from 10mm diameter grade 304 (18/10) stainless steel round bar complete with two 40x40mm square stainless steel wall mounting gallows brackets. Unit fixed to wall 600mm from the top of the front apron to the finish floor level with 4 off anchor bolts (bolts specified elsewhere).

STANDARD FLUSHING METHOD USING FLUSH VALVE METHODS:

Cobra model FM 1.000 - 35mm water supply flush valve or, Cobra FJ 2.000 - 20mm water supply flush valve and a . . . Cobra FJT 1.2 straight flush pipe connected to CP on brass adaptor (Flush valves specified elsewhere)

ALTERNATIVE FLUSHING METHOD USING HIGH LEVEL CISTERN:

Slop Hopper can be adapted to flush using 11 litres stainless steel high level cistern fitted with Supa Flush Valve and pull chain, 41mm diameter stainless steel flush pipe and 41mm chrome plated coupling which is reduced on one end to fit the 38mm connection on the unit.

- Grade 304 (18/10) Stainless Steel 1.2mm gauge
- Hygienic and durable
- Hinged bucket grid
- Outlet to suit standard 101mm PVC or cast iron "P" Trap

 CH SLOP HOPPER
 540x540x415mm
 2630035

 CH SLOP HOPPER WITH STAINLESS STEEL "P" TRAP
 540x540mm
 2630037

ACCESSORIES

Optional Installation Accessories:

TAP BRACKET WITH BUCKET HOOK

2120128

2630038




Support Bracket to fit under tap to avoid bucket load to tap.


REMOVABLE GRID





TAP & WASTE FITTING NOT INCLUDED





CHBC Slop Hopper Basin Combination

SPECIFICATION MODEL CHBC:

Franke model CHBC Slop Hopper Wash hand basin combo unit 962x550mm manufacture from grade 304 (18/10) stainless steel 1,2mm thick with a 100mm high integral splash back to the rear and both sides. The cone must be seamless with no welding and have an integral flushing rim with a 107mm waste outlet for pan connector, the inlet is fitted with a 38x250mm long vertical flush pipe for a standard flush valve. Unit fitted with a hinged bucket grid manufactured from 10mm diameter grade 304 (18/10) stainless steel round bar. Wash hand basin size 360x280x140mm deep with a 40mm waste outlet is included on the left or right hand side (please specify). Unit complete with two 40x40mm square stainless steel wall mounting gallows brackets. Unit fixed to wall 850mm from the top of the front apron to the finish floor level with 4 off anchor bolts (bolts specified elsewhere).

STANDARD FLUSHING METHOD USING FLUSH VALVE METHODS:

- a) Cobra model FM 1.000 35mm water supply flush valve or,
- b) Cobra FJ 2.000 20mm water supply flush valve and a Cobra FJT 1.2 straight flush pipe connected to CP on brass adaptor (Flush valves else where measured)

SPECIFICATION FOR 11 LITRES STAINLESS STEEL CISTERN:

Grade 304 (18/10) Stainless Steel high level cistern fitted with PVC Beta valve and pull chain connected to slop hopper with 41 mm stainless steel flush pipe and CP on brass adaptor

ALTERNATIVE FLUSHING METHOD USING HIGH LEVEL CISTERN:

Slop Hopper can be adapted to flush using an 11 litres high level cistern (Supplied as an optional extra).

- Grade 304 (18/10) Stainless Steel 1.2mm gauge
- Hygienic and durable
- Hinged bucket grid
- Outlet to suit standard 101mm PC or cast iron "P"-Trap
- Pressed wash hand basin integrated into a stepped work top for maximum hygiene.
- 150mm splash back
- 40mm Square tube brackets to allow for wall mounting

CHBC SLOP HOPPER 962x550x742mm **2630039-001 LEFT HAND UNIT**

CHBC SLOP HOPPER 962x550x742mm **2630057-001 RIGHT HAND UNIT**

NB.: Position of Basin determines whether LHU or RHU


ACCESSORIES

Optional Installation Accessories:

STAINLESS STEEL "P"TRAP

on request


2120128








TAP & WASTE FITTING NOT INCLUDED





LEFT HAND UNIT

DSBC Drip Sink & Basin Combination

SPECIFICATION MODEL DSBC:

Franke Model DSBC Drip sink wash hand basin combo unit manufactured from 1,2mm thick grade 304 stainless steel with grid, 960x550mm with a 100mm high integral splash back to the rear with a pressed bowl. A hinged bucket grid shall be fitted over the drip sink manufactured from 10mm Grade 304 (18/10) Stainless Steel round bar. Unit complete with two 40x40mm square stainless steel wall mounting gallows brackets. Unit fixed to wall 850mm from the top of the front apron to the finish floor level with 4 off anchor bolts (bolts specified elsewhere).


- Grade 304 (18/10) Stainless steel.
- Pressed drip sink bowl.
- Pressed wash hand basin.
- Hinged bucket grid
- Model DSBC
- 40x40mm Stainless Steel Square Tube Brackets.

LEFT HAND UNIT	960x550x741mm	2630025
DSBC DRIP SINK RIGHT HAND UNIT	960x550x741mm	2630025-001

NB.: Position of Basin determines whether LHU or RHU

ACCESSORIES


Optional Installation Accessories:




2120128



TAP & WASTE FITTING NOT INCLUDED





LDS Drip Sink/ Cleaner Sink

SPECIFICATION MODEL LDS:

Franke model LDS drip sink 600x500x258mm deep manufactured from Grade 304 (18/10) stainless steel 0,9mm thick and with a 40mm waste outlet. Unit fitted with stainless steel hinged bucket grid manufactured from 10mm stainless steel round bar and a pair of stainless steel Eagle brackets. Unit fixed to wall 600mm high from the top of the front apron to the finish floor level with 4 off anchor bolts (bolts specified elsewhere).

- Grade 304 (18/10) 0.9mm Stainless Steel
- Large bowl 43 litres capacity
- One piece pressed construction
- Hinged bucket grid
- Stainless Steel Eagle Brackets.

LDS DRIP SINK 600x500x258mm **2630026**

ACCESSORIES


Optional Installation Accessories:


TAP BRACKET 2120128





TAP, BOTTLE TRAP & WASTE FITTING NOT INCLUDED





DSG Drip Sink/ Cleaner Sink

SPECIFICATION MODEL DGS:

Franke model DSG drip sink 535x454 manufactured from grade 304 (18/10) stainless steel 1,2mm thick with 100 integrated splash back. Unit is fitted with hinged bucket grid manufactured from 10mm stainless steel round bar. Unit complete with two 40x20mm stainless steel wall mounting brackets. Unit fixed to wall 600mm high from the top of the front apron to the finish floor level with 4 off anchor bolts (bolts specified elsewhere).

- Grade 304 (18/10) 1.2mm Stainless Steel
- Pressed bowl 0.7mm Stainless Steel
- Hinged bucket grid
- Stainless steel brackets

DSG DRIP SINK 535x454x255mm **2630023**

ACCESSORIES


Optional Installation Accessories:


TAP BRACKET 2120128







TAP & WASTE FITTING NOT INCLUDED





FRONT VIEW





SSW Hospital Surgeon Scrup-Up Units Wall Mounted Installation

SPECIFICATION MODEL SSW:

Franke model SSW wall mounted Surgeon's Scrub unit, Length...mm (Please Specify), manufactured from grade 304 (18/10) stainless steel 1,6mm thick with 150mm high integral splashback to back, radiused internal corners and 40mm waste outlet/s (please refer to table below). The front and sides of the unit to be of double walled construction with inner wall sprayed with vermin proof bitumastic sound deadening approximately 2mm thick.


Unit fitted with removable galvanised mild steel 2mm thick fixing plate. Unit fixed to wall 900mm high from the top of the front apron to the finish floor level with anchor bolts (bolts specified elsewhere).


- Grade 304 (18/10) Stainless Steel 1.6mm gauge
- Four standard lengths
- Hygienic
- Double walled construction
- 150mm high splash back

Wall mounting supplied with galvanised fixing plate - SSW

MODEL	LENGTH	NO. OF OUTLETS	PRODUCT CODE
SSW 12	1200mm	1	2630044
SSW 15	1500mm	1	2630045
SSW 18	1800mm	2	2630046
SSW 21	2100mm	2	2630047







SSF Hospital Surgeon Scrub-Up Unit Wall & Floor Mounted Installation


SPECIFICATION MODEL SSF:

Franke model SSF floor mounted Surgeon's Scrub-up unit, Length...mm (Please Specify), manufactured from grade 304 (18/10) Stainless Steel 1,6mm thick with 150mm high integral splashback to back with radiused internal corners and provision for 40mm waste outlet/s (Please refer to table below). The front and sides of unit to be double walled construction with inner wall sprayed with vermin proof bitumastic sound deadening. Unit with 300x300mm removable inspection panels in the front skirting for access to fit the waste outlets in the trough. Unit fixed to wall and floor with anchor bolts (bolts specified elsewhere).

- Grade 304 (18/10) Stainless Steel 1.6mm gauge
- Four standard lengths
- Hygienic
- Double walled construction
- 150mm high splash back

MODEL	LENGTH	NO. OF OUTLETS	PRODUCT CODE
SSF 12	1200mm	1	2630040
SSF 15	1500mm	1	2630041
SSF 18	1800mm	2	2630042
SSF 21	2100mm	2	2630043





Combi Ward Basin


SPECIFICATION:


Franke Combi Ward Basin, 550x550x940mm high, manufactured from grade 304 (18/10 Stainless Steel), with a 700mm splashback. Heavy duty basin with polished bowl, 360mm diameter with a 40mm waste outlet. Basin fits over 25mm square Stainless Steel tubular frame bolted to wall with anchor bolts (anchor bolts specified elsewhere) splashback to accommodate sanitary accessories, such as soap dispenser and hand dryer or paper towel dispenser. Tap and accessories sold separately.

- Grade 304 (18/10) Stainless Steel
- Pressed seamless bowls designed for the highest level of hygiene and durability.
- Basin fits over a 25mm square Stainless Steel framework (supplied with basin) Basket strainer 90mm waste
- Designed to facilitate fitting of a hands free tap, soap dispenser, paper towel dispenser or hand dryer (accessories and tap not included)
- Hygienic and vandal resistant

COMBI WARD BASIN 940x550x940mm **2520010**









GALVANISED WALL FIXING PLATE

SMS Surgeon Mini Scrub-Up Unit

SPECIFICATION MODEL SMS:

Franke model SMS surgeon scrub-up unit, size 665x554x258mm deep manufactured from grade 304 (18/10) stainless steel 1,6mm thick complete an integral splash back 300mm high with tap holes for a medical elbow action mixer. Unit with a pressed bowl 525x425x258mm deep manufactured from grade 304 (18/10) stainless steel 0.9mm thick with a 90mm waste outlet for a basket strainer fitting (included with unit). Unit fitted with removable galvanised mild steel 1,6mm thick fixing plate. Unit fixed to wall 900mm high from the top of the front apron to the finish floor level with anchor bolts (bolts specified elsewhere).

- Grade 304 (18/10) Stainless Steel 1.6mm gauge
- Pressed bowl 525x425x258mm deep with 42 litres capacity 0.9mm Gauge
- 300mm high splashback
- Basket strainer 90mm waste
- Wall mounted
- Ideal for clinics, wards and veterinary applications


RECOMMENDED MIXER:


- Cobra Model 508 - 15mm elbow action medical mixer.

SMS SURGEON MINI SCRUB-UP UNIT 665x554x258mm

2630049







PP Plaster Of Paris Preparation Sink

SPECIFICATION MODEL PP:

Franke model PPGL size (please specify) Plaster of paris preparation sink manufactured from grade 304 (18/10) stainless steel 1,2mm thick with a 150mm high integral splashback to the rear. The unit shall be fitted with a pressed preparation bowl measuring 525x425x258mm deep with a 40mm waste outlet discharging into a waste cylinder measuring 250mm and 535mm deep. Waste cylinder fitted with stainless steel lid and removable strainer with provision for 40mm waste outlet. The underside sprayed with vermin proof bitumastic sound deadening and has a galvanised mild steel backing sheet. Unit fixed 900mm high from the top of the front apron to the finish floor level with anchor bolts (bolts specified elsewhere).

Please refer to options for fixing below.

Grade 304 (18/10) Stainless Steel, 1.2mm gauge

- Plaster bowl with removable stainless steel strainer and lid
- Rinse bowl discharging into plaster bowl
- Hospital bead to prevent spillage
- Pressed seamless bowls designed for the highest level of hygiene and durability.

MODEL	LENGTH	BOWL POSITION	PRODUCT CODE
PP	1500x550x1064mm	Plaster of Paris Preparation Sink Left Hand Side	2630032
PP	1500x550x1064mm	Plaster of Paris Preparation Sink Right Hand Side	2630033

Non-standard sizes available on request



GALLOWS BRACKET WITH REMOVABLE FRONT LEG

Fixing Options For Plaster Of Paris Sink

STAINLESS STEEL GALLOWS BRACKETS WITH FRONT LEG

Gallows Brackets with Front Legs manufactured from grade 304(18/10) stainless steel 40x40mm x 1,2mm thick square tubing. The front leg is detachable and is fitted with chrome plated adjustable flanged foot pieces.


*These brackets are used in areas where the floors have coved skirting.

STAINLESS STEEL CANTILEVER BRACKETS

Cantilever Brackets manufactured from grade 304(18/10) stainless steel 40x40mm x 1,2mm thick square tubing.

*These brackets are used in areas where the floors have coved skirting and the design makes cleaning under the unit very easy.

40 X 40MM SQUARE GALLOWS BRACKET	N/A	1 pair	2120025
40 X 40MM SQUARE GALLOWS BRACKET WITH DETACHABLE FRONT LEG	units 2400 mm and longer require additional bracket and leg		2120035

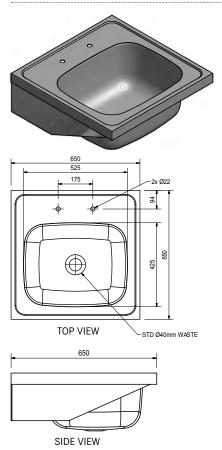

MSS Medical Sink Single Bowl

SPECIFICATION MODEL MSS:


Franke Model MSS Single Bowl Sink 650x650x258mm manufactured from Grade 304 (18/10) Stainless Steel, 1,2mm gauge with 50x 10 mm apron all round. Sink with a pressed bowl 525x425x258mm deep (43 litres) with a 40 mm waste outlet. Unit is fitted with stainless steel gusset brackets for securing the sink to the wall. (Front legs are optional).

- Pressed bowls 650x650x258mm deep
- Grade 304 (18/10) Stainless Steel 1.2mm gauge
- 43 Litre Bowl Capacity

MSS Single Bowl Sink 650x650x258mm


2620259

Waste fitting not included



1200 50 525 50 525 50 175 2 x Ø22 (TYP)

TOP VIEW



MSD Medical Sink Double Bowl

SPECIFICATION MODEL MSD:

Franke Model MSD Double Bowl Sink 1200x650x258mm manufactured from Grade 304 (18/10) Stainless Steel, 1,2mm gauge with 50x 10 mm apron all round. Sink with a pressed bowls 525x425x258mm deep (43 litres) with a 40 mm waste outlet. Unit is fitted with stainless steel gusset brackets for securing the sink to the wall. (Front legs are optional).

- Pressed bowls 1200x650x258mm deep
- Grade 304 (18/10) Stainless Steel 1.2mm gauge
- 43 Litre Bowl Capacity

MSD Double Bowl Sink 1200x650x258mm


2620290

Waste fittings not included

2 x STD Ø40mm WASTE



915 102 695 118 385 55 RECESSED WASTE TO SUIT - 40mm WASTE



TOP VIEW

CBDT Baby Bath - Inset Type

SPECIFICATION MODEL CBDT:

Franke model CBDT inset baby Bath, size 915x550x150mm deep, manufactured from Grade 304 (18/10) stainless steel 1,2mm thick. Unit with a one piece pressed semi circular bowl measuring 695x385x150mm deep with provision for 40mm waste outlet. Unit to be fixed into worktop and secured with fixing clips supplied. Cut out size 855x490mm.

- Grade 304 (18/10) 1.2mm Stainless Steel
- Hygienic and durable
- Pressed semi-circular bowl 0.9 gauge with a 40mm waste outlet

CBDT BABY BATH 915x550x150mm **2630031**

IMAGE DIMENSIONS BOWL POSITION PRODUCT CODE



CB Baby Bath Wall & Floor Mounted Installation


SPECIFICATION MODEL CB:


Franke model CB Baby Bath 1500x555mm manufactured from grade 304 (18/10) stainless steel 1,2mm thick with a 150mm integral splash back to the rear. Unit to be fitted with one piece pressed semi circular bowl measuring 695x385x150mm deep with a 40mm waste outlet. The underside of the drainer shall have a vermin proof bitumastic sound deadening supported with a galvanized backing sheet. Unit fixed 900mm high from the top of the front apron to the finish floor level with anchor bolts (bolts specified elsewhere).

Please refer to options for fixing below.

- Grade 304 (18/10) 1.2mm Stainless Steel
- Hygienic and durable
- Pressed semi-circular bowl 0.9 Gauge

СВ	1500x555mm	Left Hand Side	2630029
СВ	1500x555mm	Right Hand Side	2630030
СВ	1320x555mm	Left Hand Side	2630028
СВ	1320x555mm	Right Hand Side	2630028-001





CB WALL & FLOOR MOUNTED INSTALLATION

RIGHT HAND BOWL



40mm DIAMETER ROUND LEG (PAIR)



Fixing Options For Baby Baths

STAINLESS STEEL ROUND LEGS

Round Legs manufactured from grade 304(18/10) stainless steel 41mm diameter x 1,2mm thick round tubing. Legs to be detachable and fitted with chrome plated adjustable flanged foot pieces.

STAINLESS STEEL SQUARE LEGS


Square Legs manufactured from grade 304(18/10) stainless steel 40x40mm x 1,2mm thick square tubing. Legs to be detachable and fitted with chrome plated adjustable flanged foot pieces.


40MM DIAMETER ROUND LEGS	units 2400 mm and longer require additional legs	2 pairs	2120028
40 X 40MM SQUARE LEGS	units 2400 mm and longer require additional legs	2 pairs	2120029


IMAGE METHOD DIMENSIONS (LXW) FIXING METHOD PRODUCT CODE




WASTE FITTINGS NOT INCLUDED









Stainless Steel Bath For Burn & Wound Treatments

SPECIFICATION:

Franke model Stainless Steel Bath, size 1800x760x403mm deep, manufactured from Grade 304 (18/10) stainless steel 1.6mm thick. The unit shall be fitted with a fabricated semi circular bowl measuring 1580x608x400mm deep with provision for 40mm waste outlet. Please specify Tap Hole/s diameter if required.

- Grade 304 (18/10) 1.6mm Stainless Steel
- Hygienic and durable
- Fabricated semi-circular bowl

OPTIONAL:

 Stainless Steel frame and legs for bath size 1775x735x550mm high manufactured from 40x40x1,2mm thick square stainless steel tubing with 40x6mm floor fixing flanges to secure the frame to the floor. (bolts specified elsewhere).

STAINLESS STEEL BATH	1800x760mm	To Brick and Mortar or	2630054
OPTIONAL BATH FRAME WITH LEGS	1775x760mm	Bath Frame with legs available	2630055

FRANKE MORTUARY PRODUCTS



Franke is a leading supplier of high grade stainless steel equipment to mortuaries and post mortem rooms.


Franke is certified to ISO9001: 2008 quality management standards.


Our designs and construction ensure that our products meet the demands of safety, hygiene and quality.







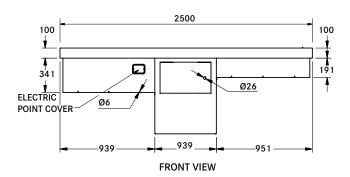



Model KZ Autopsy Table

SPECIFICATION MODEL KZ:

Franke Model KZ Autopsy Table 2500x770x850 mm to be manufactured from grade 316 L, gauge 2.0 mm stainless steel sloping towards bowl and fitted with 2 x diamond spreaders plumbed to cold water supply. Both spreaders to be plumbed to 15mm copper tube connected to stop cock. The entire worktop and area below bowl is to be equipped with removable inspection panels to conceal plumbing and all joints shall feature a return bend to prevent water creep. Bowl 350x500x200 mm deep to be manufactured from grade 316 L, gauge 1.6 mm integrated stainless steel flush pipe of 110 mm Ø for connection to PVC S-trap. Bowl to be equipped with removable catch grid fitted to the edge of bowl using two fixing lugs fuse welded to bowl. The bowl shall be equipped with a removable perforated stainless steel overflow with handle and diamond spreade, stop cock and 1 x 3 Meter flexible hose connected to hand controlled demand trigger spray. Pedestal to be manufactured with a reinforced base for securing to plinth using 4 off 10mm Ø stainless steel anchor bolts.

FEATURES:

- Manufactured in grade 316 L laboratory stainless steel
- Heavy duty construction with 2 mm gauge top and 1.6mm panels
- Heavy duty pedestal for fixing to plinth
- Removable panels for inspection and maintenance
- Ergonomic design to facilitate free operator movement
- Removable grid overflow
- Integral rinsing system with cold water control and flexible 3m flexible hose and spray nozzle
- Integrated 110mm Ø stainless steel waste outlet for connection to PVC S-trap
- Provision for electrical plug point connection
- Sloped corners and edges to facilitate easier cleaning
- Removable catch grid fitted to specially designed fixing lugs to edge of bowl

MODEL KZ AUTOPSY TABLE


2500x770x850mm

2630065


OPTIONAL


Electrical Plug Point: The units shall be fitted with a 3-point electrical water proof plug adjacent to plumbing fittings.

TYPE / MODEL DIMENSIONS (L X D X H) PRODUCT CODE **IMAGE**




VENTILATED DISECTION TABLE:





DOCKING TROLLEY:



Ventilated Disection Table with Docking Trolley

SPECIFICATION:

Franke Back Draft Ventilated Dissection Table with Docking Trolley 2250 mm x 950mm wide x 1350 mm high manufactured from grade 316 stainless steel. The unit is fitted with a bowl size 860 x 550 x 200 mm deep with a 110 mm outlet pipe and a sump 1256 x 550 with a 110 mm outlet pipe, sparge pipes, ventilation duct and a removable body tray.

Plumbing fittings: The table shall be equipped with 3 x stop cocks and 1 x 3 Meter flexible hose connected to hand controlled demand trigger spray.


- Manufactured in grade 316 L laboratory stainless steel
- Heavy duty construction with internal support frame
- Sloped corners on sump to facilitate easier cleaning
- Removable inspection panels for maintenance
- Integral rinsing system with cold water control and 2x flexible hoses with spray nozzles
- Integrated Ø 110mm stainless steel waste outlet for connection to PVC Gulley Trap
- 2x Removable grid waste traps
- Provision for electrical plug point connection points (optional)

VENTILATED DISECTION 2250x950x1350mm 2630134 **TABLE**

DOCKING TROLLEY 1722x832x900mm 2630136

OPTIONAL

Electrical Plug Point: The units shall be fitted with a 3-point electrical water proof plug adjacent to plumbing fittings.



Tap & waste fitting not included 2565 2520 620 565 65 Recessed Waste To Suit - 40mm waste TOP VIEW

FRONT VIEW

MTS Post Mortem Table

SPECIFICATION MODEL MTS:

Franke Model MTS Post Mortem Table and sink 2565x765x865mm high, manufactured from Grade 304 (18/10) stainless steel 1,6mm thick. Rinse bowl 500x500x230mm deep pressed bowl with a 40mm waste outlet. The underside sprayed with vermin proof bitumastic sound deadening and supported with a 30x30x3mm framework and galvanised mild steel backing sheet. Unit is fitted on to six 40mm stainless steel legs and cross braces, each leg fitted with adjustable flanged foot piece. Unit fixed 900mm high from the top of the front apron to the finish floor level with anchor bolts (bolts specified elsewhere).

- Grade 304 (18/10) 1.6mm Stainless Steel
- Recessed slab with 30mm deep ledge
- One Piece pressed rinse bowl
- Sound deadened with galvanised backing sheet


OPTIONAL FITTINGS:

- Cobra Model 515-21 15mm elbow action medical mixer with swan-neck swivel outlet.
- Cobra Model 519-21 15mm elbow control hand spray set.

MTS POST MORTEM TABLE

2565x765 x900mm

2630021

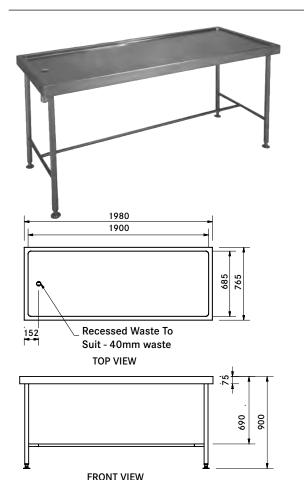

MT Post Mortem Table

SPECIFICATION MODEL MT:

Franke Model MT Post Mortem Table 1980x765x900mm high manufactured from grade 304 (18/10) stainless steel 1,6mm thick. Slab constructed with 30mm deep recess all round with a built in fall towards the 40mm waste outlet. The underside sprayed with vermin proof bitumastic sound deadening and supported with a 30x30x3mm framework and galvanised mild steel backing sheet. Unit is fitted on to four 40mm stainless steel legs and cross braces, each leg fitted with adjustable flanged foot piece. Unit fixed 900mm high from the top of the front apron to the finish floor level with anchor bolts (bolts specified elsewhere).

- Grade 304 (18/10) 1.6mm Stainless Steel
- Recessed slab with 30mm deep ledge
- Sound deadened with galvanised backing sheet


OPTIONAL FITTINGS:

- Cobra Model 519-21 15mm elbow control hand spray set.

MT POST MORTEM TABLE


1980x765x900 mm

2630105



FEATURES OF THE FRANKE MODULAR BODY RACKS

- Manufactured in grade 304 stainless steel
- Modular design for multiple combinations with variable shaft and roller assemblies to suite various cold room dimensions.
- Solid 16 mm Ø roller shafts
- Nylon rollers to suite body tray handles
- Durable design with 40 x 40 x 1.5mm gauge square tubing Posts and 3 mm gauge stainless steel "U" shaped Bearers
- Adjustable stainless steel foot piece



Franke Single Body Rack

SPECIFICATION:


Franke Model Single Body Racks connected in series to form "x No." of banks (Please specify). All racks manufactured from grade 304 stainless steel with $40 \times 40 \times 1.5$ mm gauge square tubing Post and 3 mm gauge stainless steel "U" shaped Bearers. All shafts to be from solid 16 mm Ø stainless steel and fitted with nylon rollers and stainless steel circlips. All joints to be fuse welded. All racks to be joined together at the top of each fixing post with a 40 x 40 x 6 mm gauge stainless steel angle stay to stabilize the banks body trays. All bearers and stays shall be bolted with 8 mm stainless steel bolts and each post shall be fitted with an adjustable stainless steel foot piece.

T4 SINGLE BODY RACK - 2120x726x2075mm **2630066**

FOUR TIER

T3 OBESE SINGLE 2120x926x2075mm **2630069**

BODY RACK - THREE TIER



Franke Double Body Rack


SPECIFICATION:

Franke Model Double Body Racks connected in series to form "x No." of banks (Please specify). All racks manufactured from grade 304 stainless steel with $40 \times 40 \times 1.5$ mm gauge square tubing Post and 3 mm gauge stainless steel "U" shaped Bearers. All shafts to be from solid 16 mm Ø stainless steel and fitted with nylon rollers and stainless steel circlips. All joints to be fuse welded. All racks to be joined together at the top of each fixing post with a 40 x 40 x 6 mm gauge stainless steel angle stay to stabilize the banks body trays. All bearers and stays shall be bolted with 8 mm stainless steel bolts and each post shall be fitted with an adjustable stainless steel foot piece.

T4 DOUBLE BODY RACK - 2120x1352x2075 mm **2630067**

FOUR TIER

T3 OBESE DOUBLE 2120x1725x2075mm **2630070 BODY RACK - THREE TIER**



Franke Addtional Obese Multi-bank Extention - Three Tier


SPECIFICATION:

Franke Multi-Bank Extention manufactured from grade 304 stainless steel to form required 3 banks or more.

MULTI-BANK EXTENTION 2120x665x2075mm **2630068**

 OBESE MULTI-BANK
 2120x870x2075mm
 2630071

 EXTENTION




Fabricated BTS Body Tray

SPECIFICATION MODEL BTS:

Franke Fabricated Body Tray manufactured in grade 304 stainless steel, complete with 25 mm \emptyset round stainless steel frames to bottom and handles.

- Grade 304 stainless steel
- Designed to suit Franke model T4 body racks
- 50 mm depth forensic body tray

BTS STANDARD BODY TRAY	2160x555mm	2630078
BTS OBESE BODY TRAY	2160x756mm	2630072



OBESE BTS BODY TRAY - TOP VIEW


Pressed Body Tray


SPECIFICATION:

Franke Pressed stainless steel body tray manufactured from grade 304 (18/10) stainless steel 1,2mm thick, with a 20mm square tubing frame all round, two 25mm diameter support fitted longitudinally to the underside for the Rapid Transfer System and two 20mm diameter stainless steel handles.

- Choice of Grade 304 or 316 (18/10) 1.2mm Stainless Steel
- Hygienic and durable

STANDARD BODY TRAY 304	2095x567mm	2630062
STANDARD BODY TRAY 316	2095x567mm	2630076
OBESE BODY TRAY 304	2095x667mm	2630061
OBESE BODY TRAY 316	2095x667mm	2630077







Franke Model TT Transport Trolley


SPECIFICATION MODEL TT:


Franke Model TT Transport trolley $2000 \times 672 \times 850$ mm high manufacture from grade 304 stainless steel tubular frame. Trolley fitted with 125 mm diameter bolt type castors and rubber bumpers.

- Grade 304 stainless
- Castors 125 mm diameter non marking grey rubber
- Designed to suit Franke models BTS and BTO sliding body trays

TT TRANSPORT TROLLEY 2000x672x850mm

2630073





Franke Model TLT Tilting Trolley

SPECIFICATION MODEL TLT:


Franke Model TT standard Tilting trolley 2000 x 672×858 mm high manufacture from grade 304 stainless steel tubular frame. Trolley fitted with 125 mm diameter bolt type castors and rubber bumpers.


- Grade 304 stainless
- Castors 125 mm diameter non marking grey rubber
- Designed to suit Franke models BTS and BTO sliding body trays


TLT TILTING TROLLEY


2000x672x858mm


2630075














Franke Model ET Transport Trolley

SPECIFICATION MODEL ET:


Franke Model ET Standard Hydraulic Lifting trolley 2005 x 816 x 360 mm minimum height and 1850 mm maximum height specially designed for sliding body trays manufacture from grade 304 stainless steel tubular frame. Trolley fitted with 125 mm diameter bolt type castors and shafts and rollers to suit sliding body trays. To be fitted with a hand operated pump connected to hydraulic cylinder with a maximum lifting load of 250 kg.

- Grade 304 stainless
- Castors 125 mm diameter non marking grey rubber
- Suitable for receiving Franke models BTS and BTO sliding body trays
- Designed to suit Franke models T3 and T4 body racks
- Foot Operated Pump
- Hydraulic Cylinder (Max lifting load: 250 kg)

ET ELEVATION TROLLEY 2220 (L) x 728 (D) mm

min height: 360mm max height: 1850mm 2630074

900 300 300 A--FRONT VIEW



Instrument Cabinet




SPECIFICATION:

Franke Model Wall Mounted Instrument Cabinet manufactured from grade 316 stainless Steel 1,6 mm thick with two hinged doors with shatterproof glass panel. Doors are lockable and are supplied with two keys. Unit has two stainless steel shelves and is provided with two key hole slots for mounting the unit to the wall.

- Wall mounted
- Complete with two doors fitted with shatter proof glass panels and a Cam lock
- Manufactured from 1.6 mm Thick Grade 316L Stainless Steel

INSTRUMENT CABINET 900x300x600mm **2630063**

SECTION SIDE VIEW



Writing Desk



SPECIFICATION:

Franke Model Wall Mounted Writing Desk manufactured from grade 316 L stainless steel with a single front drawer on smooth running telescopic slides. The unit has supa-wood backing to provide a firm no flex stainless steel writing surface. Base is removable for easy mounting.

- Wall mounted
- Single Drawer to front mounted on telescopic drawer slides
- Supa-wood backing to prevent denting of top
- Manufactured from 1.6 mm thick grade 316L Stainless Steel

WRITING DESK 900x570x300mm **2630064**

Supplied Mortuary Projects





AVT 2 - RAPID TRANSFER TABLE WITH PRESSED BODY TRAY



DVT - WALL BENCH AND WRITING DESK



PRESSED BODY TRAYS





CH SLOP HOPPER Z-SERIES SHELVING AND POT SINK

IMAGE TYPE / MODEL PRODUCT CODE



DEKO 260 Washer Disinfector

SPECIFICATION:

DEKO Model 260 instrument washer disinfector, $650 \times 625 \times 1850$ mm, manufactured from Grade 304 stainless steel with an internal washing chamber no less than $507 \times 507 \times 485$ mm. The unit must be fitted with adjustable feet and be freestanding. The Instrument washer must comply with the ISO 15883-1, 15883-2 specification. The unit must have a built in circulation pump of no less than 700l per minute to compensate for any drop in incoming water pressure. Interlocking front–opening door with safety lock.

DEKO 260 Base Model

2800003




DEKO 2200 Instrument Dryer


SPECIFICATION:

DEKO Model 2200 Dryer cabinet, $785 \times 810 \times 1970$ mm, manufactured from Grade 304 stainless steel with an internal drying chamber not less than $700 \times 700 \times 1255$ mm. Dryer must be manufactured with a minimum of 8 tiers to accommodate instrument trays and An-tubes. The Dryer is to be manufactured with an integrated air filter. The unit to be manufactured with adjustable cycle time of 1–99 minutes and a continuous cycle. The unit must have a minimum of five programs and a variable temperature setting of up to 90 degrees Celsius with a cycle time indicator.

DEKO 2200 Base Model


2800002





Z-SERIES DOUBLE SLOTTED WALL BANDS





Z-Series Shelving



SPECIFICATION:

Franke Model Z-Series Adjustable Shelving manufactured from grade 18/10 Stainless Steel 1,2mm thick. One piece shelf and integrated bracket with a 25mm apron to front and sides with 30mm turn up at back and safety edge on corners.

SPECIFICATION - WALL BANDS:

Franke Model Z-Series Wall Bands manufactured from grade 18/10 Stainless Steel 1,2 mm thick. Available in 1000 mm; 1500 mm and 1800 mm Lengths and are double slotted to allow for two shelves to be lined up next to each other on a single wall band with very little space between shelves.

- Modular easy to assemble, expand and adjust
- Durable constructed and designed to the highest standards of strength and hygiene

OPTIONAL EXTRAS:

Grade 316 Stainless Steel, Solid or Perforated Shelves, 300 or 400 mm
 Wide Shelves


STANDARD SHELVING SIZES


SOLID	900x300 mm	2620036
PERFORATED	900x300 mm	2620035
SOLID	900x400 mm	2620037
PERFORATED	900x400 mm	2620038
SOLID	1200x300 mm	2620040
PERFORATED	1200x300 mm	2620039
SOLID	1200x400 mm	2620042
PERFORATED	1200x400 mm	2620041

NON-STANDARD SIZES AVAILABLE ON REQUEST

2620125	1000 mm
2620124	1500 mm
2620126	1800 mm







Fastrack Modular Shelving

SPECIFICATION:

Franke Model Fastrack Modular Shelving Solid/Louvred (please specify) Shelves manufactured from 1.2mm thick grade 304 (18/10) stainless steel with die cast aluminium corner brackets for fixing to \emptyset 25mm vertical posts.

Posts are made from 1.2mm thick Ø 25mm diameter stainless steel and fitted with end caps at one end and adjustable foot piece.

- Modular easy to assemble, expand and adjust
- Mobile suitable for many applications
- Durable constructed and designed to the highest standards of strength and hygiene

OPTIONAL EXTRAS:

- Set of four castors 125mm ø/two lockable

TYPE OF SHELF	DIMENSIONS (LXW)	PRODUCT CODE
Standard Shelvi	ng Sizes	
Solid	750x400mm	2620051
Solid	750x500mm	2620055
Louvred	750x400mm	2620059
Louvred	750x500mm	2620063
Solid	1000x400mm	2620052
Solid	1000x500mm	2620056
Louvred	1000x400mm	2620060
Louvred	1000x500mm	2620064
Solid	1250x400mm	2620053
Solid	1250x500mm	2620057
Louvred	1250x400mm	2620061
Louvred	1250x500mm	2620065
Solid	1500x400mm	2620054
Solid	1500x500mm	2620058
Louvred	1500x400mm	2620062
Louvred	1500x500mm	2620066

Non-standard sizes available on request

Stainless steel posts with 1,2mm wall thickness 25mm \varnothing :

1000mm	2620027
1500mm	2620028
1800mm	2620029
2000mm	2620030

Non-standard sizes available on request

Posts with castors:

1000mm	2620031
1500mm	2620032
1800mm	2620032-001
2000mm	2620033

FRANKE SOUTH AFRICA

CALL CENTRE Tel 0861 372 653 Fax 0866 592 073

enquiry.fsa@franke.com www.franke.co.za

DURBAN 1194 South Coast Road, Mobeni, Durban, 4092. South Africa Tel +27 31 450 6300 Fax +27 31 450 6304

GAUTENG 77 Roan Crescent, Sage Corporate Park North, Old Johannesburg Road, Midrand, 1682 South Africa

CAPE TOWN Unit 1, 10 Gold Street, Northgate Business Park, Northgate Estate, Cape Town, 7405 South Africa



The information and dates supplied in this brochure are based on the information believed to be reliable, however are not binding and inaccuracies may occur. Franke reserves the right to change Specification and design at any time without notice.

© 2017 by Franke South Africa. All rights reserved under the Copyright Act of 1987 with the amendments. Reproduction of any of the content, full or partial, is allowed only with prior written approval of Franke South Africa. No reasonable requests will be refused provided the conditions as laid out are met.











