

# prisma

## Classique



*Point of Use Electric Water Heaters with  
Glasslined Inner Cylinder*



on the Enamel  
Coated Element



**NEW**  
**FOREVER BLUE**  
Longer Lasting  
Enamel Coated Element



# SAVES

ON WATER WASTAGE



POINT OF USE ELECTRIC WATER HEATERS

## product applications

Kwikot Prisma Classique Electric Water Storage Heaters are suitable for domestic kitchens and laundries, medical suites, clinics and office kitchenettes where hot water is readily required. The units solve the problem of having to wait for hot water from larger electric water heaters (geysers) which may be installed some distance from the point of use, thus saving on water wastage.



## product features


- Kwikot Prisma Classique Electric Water Heaters have a Glasslined Inner Cylinder, and are B Rated Energy Efficient offering a long life to the cylinder (subject to water conditions equivalent to Metropolitan supply authorities).
- All units are fitted with a longer lasting enamel coated element and have a shiny non-corrosive polypropylene outer casing, which provides aesthetic appeal and will not discolour overtime.
- Thick polyurethane foam insulation is used to reduce inner cylinder heat loss.
- Units are fitted with a large sacrificial anode, providing additional inner cylinder protection.
- External Temperature Controls are fitted with a maximum temperature setting of 75°C.
- Capillary Thermostat for accurate temperature settings.
- Working pressure 0kPa.
- Fitted electrical cable with 15 Amp 3 Pin Electrical Plug.



## product specification data and dimensions

Units are tested to SANS 60335-2-21 and SANS 151 and are SA Watermark listed. The Thermostat, will cutout when the required temperature is reached. The recommended setting is 60°C. Faulty Thermostats and Elements can be replaced when necessary.

Model	10lt Under Basin	10lt Over Basin	15lt Over Basin	30lt Over Basin
Weight (empty)	8.1kgs	7.9kgs	9.3kgs	14.0kgs
Electrical Supply	230V	230V	230V	230V
Wattage	1500	1500	1500	1500
Heating Time ( $\Delta T=55^{\circ}C$ )	26 minutes	26 minutes	40 minutes	80 minutes
<b>Product Code</b>	<b>FPRX-10-UB</b>	<b>FPRX-10-OB</b>	<b>FPRX-15-OB</b>	<b>FPRX-30-OB</b>
<b>Dimension</b>	<b>10lt Under Basin</b>	<b>10lt Over Basin</b>	<b>15lt Over Basin</b>	<b>30lt Over Basin</b>
A (mm)	340	340	360	440
B (mm)	291	291	329	389
C (mm)	347	347	375	455
D (mm)	90	90	97	113
E (mm)	15 (1/2")	15 (1/2")	15 (1/2")	15 (1/2")

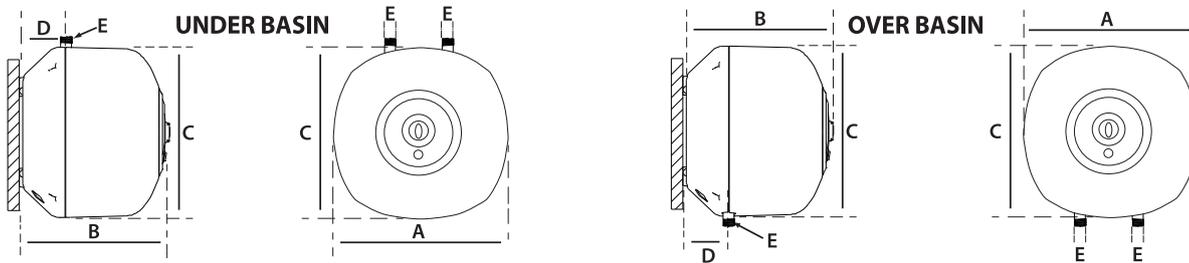

## product installation data

- Installation of the point of use electric water storage heater must be carried out by a qualified plumber.
- The Under Basin unit may only be fitted with a counter surface PUSH THROUGH MIXER (not supplied) and the Over Basin Unit with a over counter PUSH THROUGH MIXER (not supplied) or with STOP COCK and SPOUT (not supplied). These are available from **Electrolux**.

## product warranty and anode servicing

- Five years on the inner Glasslined cylinder and the warranty is subject to water conditions equivalent to main Metropolitan supply authorities.
- Two years on the Enamel coated element and one year on all other electrical components.
- Warranties are applicable from date of purchase and validated by means of a purchase invoice, or submittance of a completed warranty card to **Electrolux SA(Pty) Ltd** (card supplied with unit).
- The warranty is applicable in South Africa, Namibia, Lesotho, Swaziland and Botswana and subject to water conditions equivalent to main Metropolitan supply authorities.
- **The Sacrificial Anode must be checked every twelve months for degradation and replaced if necessary.**



IEC 60353-5-2-21

**IPX4**

Electrolux SA (Pty) Ltd



www.electrolux.co.za

**inland division**  
3 Aberdeen Road,  
Industrial Sites,  
Benoni  
Tel: (011) 897 4600

**eastern cape division**  
39-41 Leadwood Crescent,  
Fairview,  
Port Elizabeth  
Tel: (041) 399 4000  
Fax: (041) 367 1005

**western cape division**  
15 Purdey Road,  
Sheffield Business Park, Phillippi,  
Cape Town  
Tel: (021) 690 2700  
Fax: (021) 690 2800

**kwazulu-natal division**  
814 Peter Close,  
Springfield Park,  
Durban  
Tel: (031) 574 8700  
Fax: (031) 574 8750