



2 З

4

5

6

8

9

10

11


13

Electric Water Heater

product features

- Megaflo 450 litre electric water heaters have been designed for light commercial and large domestic hot water applications.
- When used with good mains pressure, the water heater can be installed almost anywhere floor standing or roof.
- Megaflo 450 litre water heaters have a polyurethane foam insulation and are finished with a galvanised outer casement.
- The element load cannot be switched directly through the thermostat and a contactor switch rated 30Amp AC1 duty must be utilised. The contactor switch is not a standard component and must be specified and purchased separately.
- Megaflo 450 litre can be installed in all areas. For aggressive water conditions, "incalloy" electric heating elements can be requested at an additional cost.
- Megaflo 450 litre water heaters operate up to 400kPa and will work efficiently under lower pressures.

product specification data

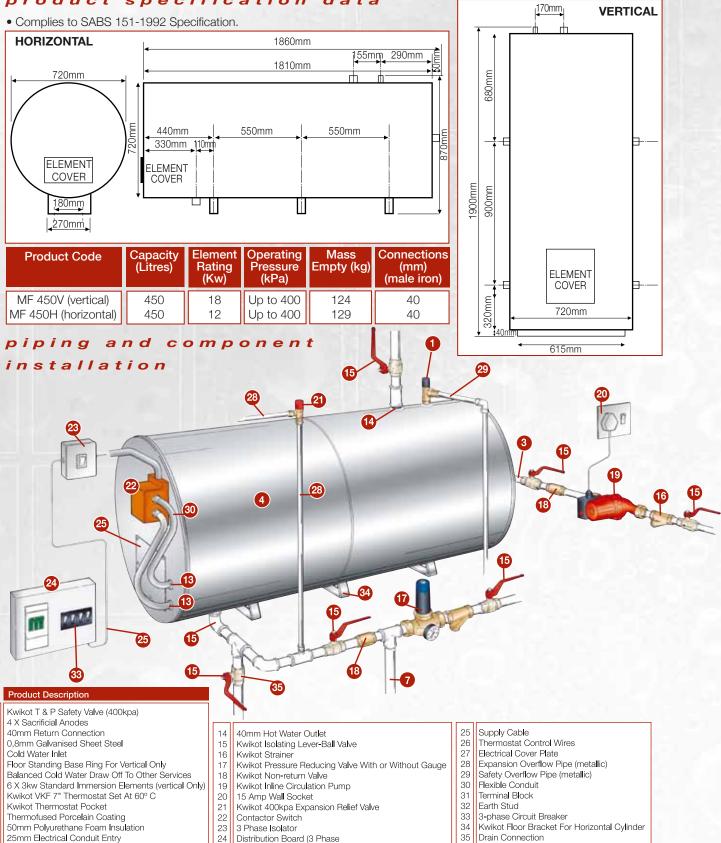


product installation data

- The water heater must be installed under cover (inside or outside) and not exposed directly to climatic weather conditions.
- The following minimum installation clearance must be allowed for: 500mm clear space around the Safety Valve and for servicing the anodes.
- 300mm clear space immediately in front of the electrical cover plate.
- Do not wall mount.

product warranty and anode servicing

The period of guarantee is from the date of installation providing that documentation of proof of installation is furnished, or alternatively from date of manufacture as determined from the serial plate or date stamp code.

- One year on the standard immersion VKF7" elements, thermostat and flange assembly plate and gasket.
- Two years on the Safety Valve.
- Three Years on the inner cylinder, subject to water conditions equivalent to main Metropolitan supply authorities. This guarantee is subject to only genuine Kwikot replacement parts (element and thermostat etc) been used whilst the inner cylinder is still under guarantee.
- The guarantee on the installation is the responsibility of the installer. Water specification and Anode servicing/replacement is as follows:

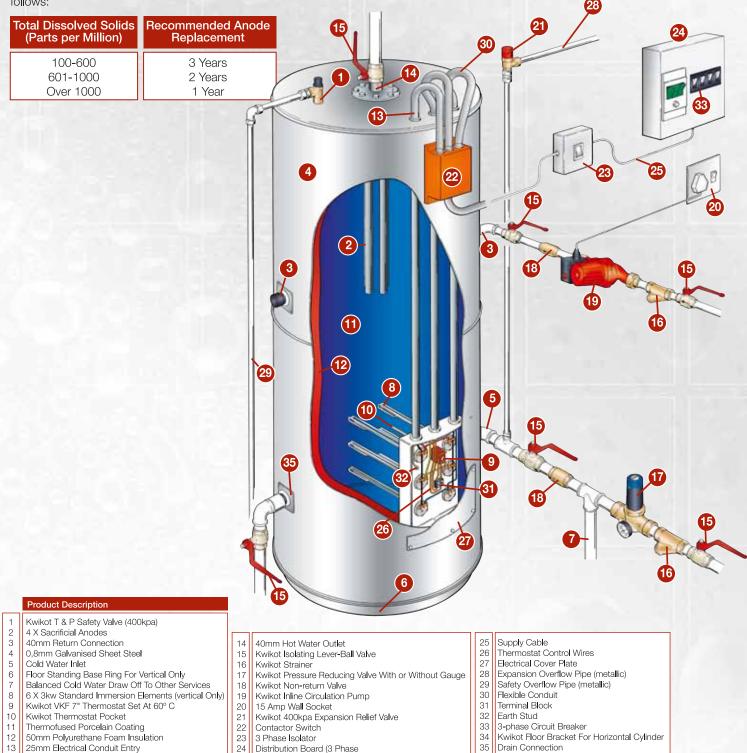




standard fitted accessories

- Immersion elements.
- Fail-safe thermostat graduated between 30°C and 70°C.
- Flange plate with magnesium sacrificial anodes.
- Thermostat pocket.
- The safety valve (supplied fitted to water heater) is designed to release water if the pressure in the water heater approaches 400kPa or if the temperature approaches 94°C. The safety valve is fitted with a 20mm male thread connection and the overflow is a 22mm Conex, which must be piped with a metallic overflow pipe to the exterior of the building.

additional installation components

A selection of Kwikot installation components avialable.



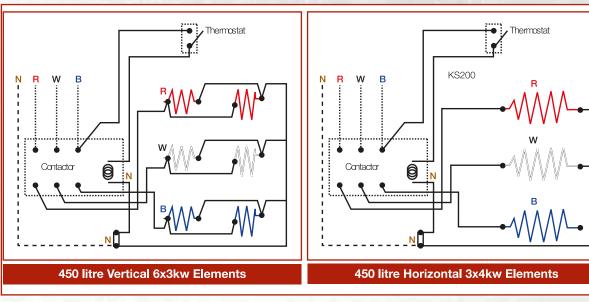

kwikot branch and website addresses:kwikot (pty) Itdkwikot (pty) Itdinland divisioneastern cape division

PO Box 1016 Benoni 1500 Tel: (011) 897 4600 Fax: (011) 914 4750 **Domestic Sales** email: sales.inland@kwikot.com *AFTER SALES SERVICE TEL:* 0861 KWIKOT (594568) **Export Sales:** email: sales.export@kwikot.com **Marketing:** email: marketing.info@kwikot.com **Technical:** email: technical.info@kwikot.com PO Box 29142, Sunridge Park, Port Elizabeth, 6008 Tei: (041) 399 4000 Fax: (041) 367 1005 **Domestic Sales**

Email: sales.easterncape@kwikot.com

kwikot (pty) Itd western cape division

PO Box 443, Eppindust, 7475 Tel: (021) 690 2700 Fax: (021) 690 2800 **Domestic Sales** Email: sales.westerncape@kwikot.com

kwikot (pty) ltd kwazulu-natal division

P O Box 47366, Greyville, 4023 Tel: (031) 574 8700 Fax: (031) 574 8750 **Domestic Sales** email: sales.kwazulunatal@kwikot.com

www.kwikot.com

10/'13

450

IEGAFLO

Kwikot, first in mind, first in absolute peace of mind