

KwikBoil

INSTANT BOILING WATER DISPENSERS



boiling water
24/7!

STAINLESS STEEL
OR WHITE EPOXY
OUTER CASING

2,5 LITRE; 5 LITRE; 7,5 LITRE;
10 LITRE; 15 LITRE & 25 LITRE

INSTANT BOILING WATER DISPENSERS



KwikBoil

INSTANT BOILING WATER DISPENSERS



features

- Stainless steel or white epoxy outer casing
- On tap boiling water
- Wall mounted
- Fully automatic
- Advanced electronic controls
- Safe, hygienic and energy efficient
- Steam free and convenient

*Instant boiling water at
your fingertips 24/7!*

electrical requirements

- Full Product range operates at 230 Volts AC, 50Hz, Single Phase Electricity.
- Consealed plumbing available on all units.
- A flexible 2 meter electrical cord complete with 3 pin plug is supplied on all models. Do not loosen the cord grip or pull excess cord into the Kwikboil. If the supply cord of the unit is damaged, it must be replaced by a qualified service person.

water quality

Caution is suggested if the Boiling Water Unit is to be connected to a water supply with a high content of silica or calcium. Water supplies of this nature may be detrimental to the unit's operation and may cause the warranty to become void.

For further information relating to the guidelines of water quality, contact your local service agent for advice.





warranty

Twelve Months from date of purchase. Proof of purchase Document must be kept to validate the warranty.

product specifications


Specifications	2,5 litre	5 litre	7,5 litre	10 litre	15 litre	25 litre
Product code - white epoxy	Kwikboil 2.5	Kwikboil 5	Kwikboil 7.5	Kwikboil 10	Kwikboil 15	Kwikboil 25
Product code - stainless steel	Kwikboil 2.5 SS	Kwikboil 5 SS	Kwikboil 7.5 SS	Kwikboil 10 SS	Kwikboil 15 SS	Kwikboil 25 SS
Nominal storage capacity (litres)	2,5	5	7,5	10	15	25
Initial draw-off (180ml cups)	15	30	45	60	100	150
Recovery per min (180ml cups)	2	2	2	2	2,5	3
First hour delivery (180ml cups)	120	135	150	175	200	270
Approx. time for 1st cup (mins)	6	7	7	10	11	11
Heating element input (kW)	1.8	2.0	2.0	2.0	2.4	3.0
Min. supply pressure (kPa)	20	20	20	20	20	20
Max. supply pressure (kPa)	1000	1000	1000	1000	1000	1000
Approx. weight empty (kg)	6,6	8,5	8,7	10	11,2	14,2
Approx. weight full (kg)	10,7	16,3	18,3	25,5	30,4	47,2

Dimensions mm	2,5 litre	5 litre	7,5 litre	10 litre	15 litre	25 litre
A	275	320	320	348	370	400
B	165	195	195	225	230	255
C	365	448	448	460	513	613
D	263	293	293	323	328	353
E	82	82	82	82	82	82
F	243	273	273	303	306	333
G	110	110	110	137	140	115
H	44	44	44	44	44	44
I	28	28	28	28	28	28
J	90	90	90	90	90	90
K	93	93	93	93	93	93
L	18	18	18	18	18	18
M	49	49	49	49	49	49
N	45	45	45	45	45	45
P	20	20	20	20	20	20
R	220	220	220	220	220	220
S	16	16	16	16	16	16
T	N/A	N/A	N/A	N/A	N/A	135





2,5; 5; 7,5; 10 & 15 LITRE

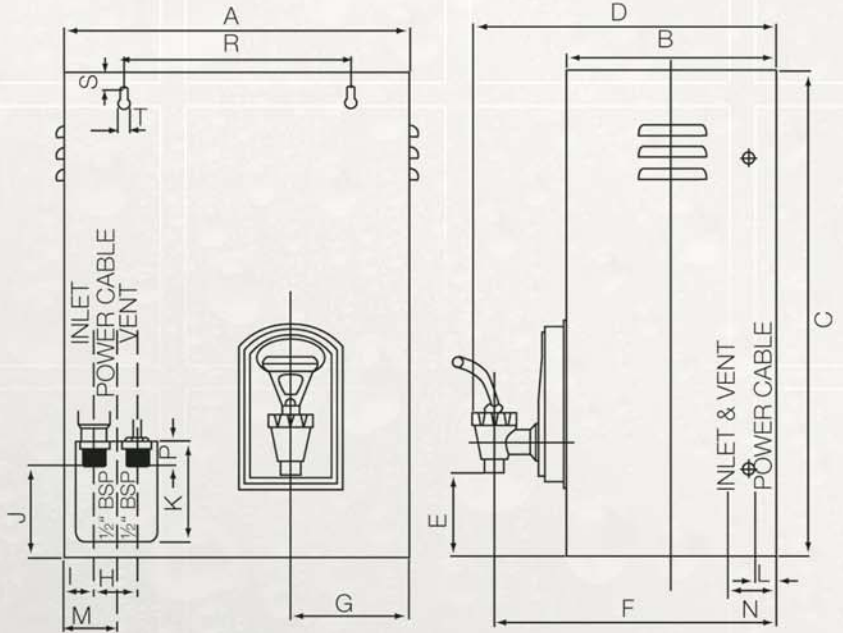

**Kwikot (Pty) Ltd
Inland Division**

P.O. Box 1016
Benoni
1500
Tel: 011 897 4600
Fax: 011 914 4750

**After Sales Service :
0861KWIKOT (594568)**

**Kwikot (Pty) Ltd
Kwazulu-Natal Division**

P.O. Box 47366
Greyville
Durban
4023
Tel: 031 574 8700
Fax: 031 574 8750


**Kwikot (Pty) Ltd
Eastern Cape Division**

P.O. Box 29142
Sunridge Park
Port Elizabeth
6008
Tel: 041 399 4000
Fax: 041 367 1005

**Kwikot (Pty) Ltd
Western Cape Division**

P.O. Box 443
Eppingdust
Cape Town
7475
Tel: 021 690 2700
Fax: 021 690 2800

25 LITRE

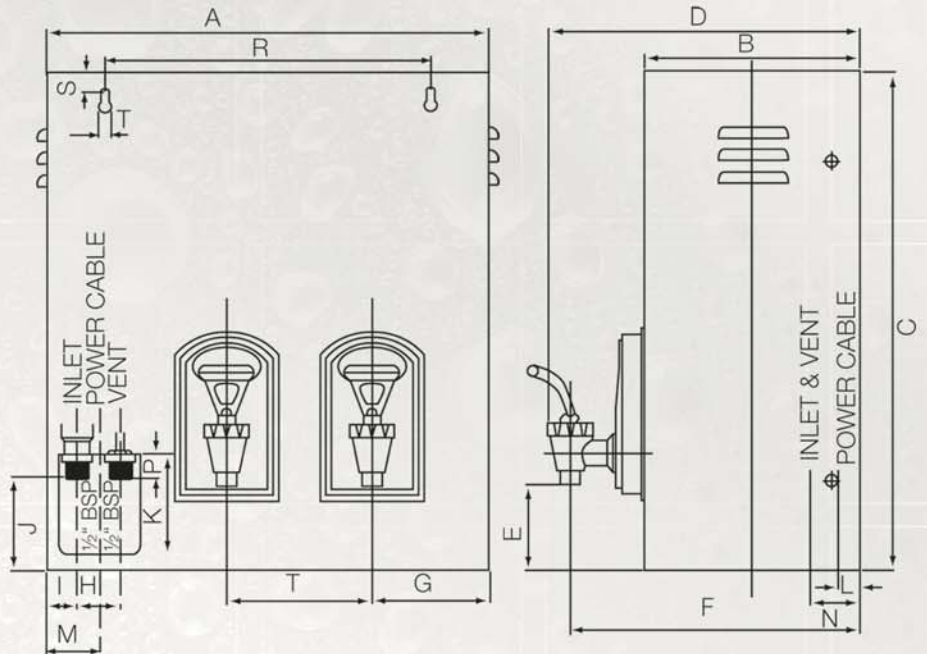

Installation guide and owners manual supplied with each unit

www.kwikot.com



KwikBoil

INSTANT BOILING WATER DISPENSERS

Kwikot, first in mind, first in absolute peace of mind

