

KwikTRAY

geyser drip trays



LIGHTWEIGHT &
EXTREMELY

DURABLE

DOMESTIC GEYSER DRIP TRAYS

product features

- The KwikTray Geyser Drip Tray is manufactured from polyethylene and is extremely durable, lightweight and will not rust, buckle or dent.
- The Drip tray has been designed to discharge any water that is captured by the tray, through the waste outlet.
- Trays are supplied with a 50mm PVC adaptor, for connecting the waste pipe to the tray.
- Trays are available for horizontal and vertical geyser installations.
- Trays for horizontal geyser installation have two raised supports (Patent No. 2005/07669) for the geyser to stand on. This prevents the geyser from standing in water, should water accumulate in the tray, as specified by SANS 10254.

product specification data

The Kwikot KwikTray complies to SANS 11848 Drip Tray Specifications and forms part of SANS 10254 Geyser Installation Specification.

installation specification data

Horizontal Geyser Installation (roof truss mounting)


With a horizontal geyser installation, the horizontal KwikTray format is to be used and the correct size tray must be installed for the corresponding geyser capacity (refer to table)

Code	Product	Outer Dimensions (mm)
GSTP - 760	Vertical (50lt, 100lt, 150lt, 200lt and 250lt)	660 x 610
GSTP - 1200	Horizontal (100lt)	1180 x 610
GSTP - 1650	Horizontal (150lt and 200lt)	1600 x 610
GSTP - 1950	Horizontal (250lt)	1850 x 610

The drip tray must be installed in the following manner:

- It must be placed on the tie beams over a load-bearing wall and supported by timber that complies with at least grade 5 SANS 1783-2 and of a size at least 114mm x 50mm, spaced not more than 500mm apart.
- It must be sloped to the outlet end and rigidly maintained in that position.
- The 50mm PVC Adaptor must be fitted to the waist outlet on the tray. A 50mm PVC pipe is to be attached and piped at a slope away from the drip tray and discharged to the outside of the building in a visible position.

The geyser is to be placed horizontally inside the tray. The Vacuum Breakers, Drain Cock and Safety Valve must be within the overall confines of the geyser tray dimensions, so that any water leakage is captured by the drip tray. Should the pressure control valve be installed in the roof, the same applies.

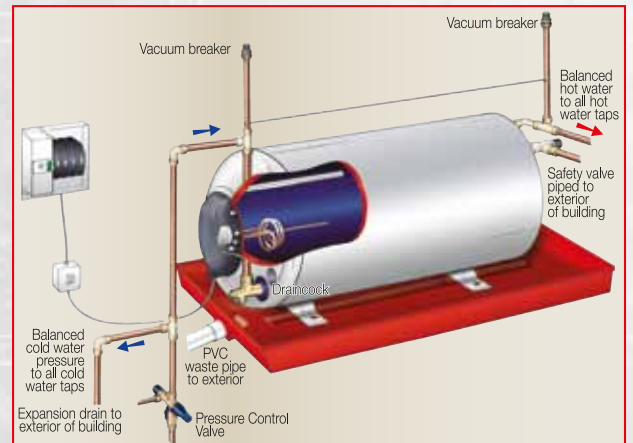


Vertical Geyser Installation (cupboard mounting)

With a vertical geyser installation the vertical KwikTray format must be used. The tray is positioned directly underneath the vertical geyser installation.

The drip tray is to be installed in the following manner:

- Steel brackets to be used if wall mounted.
- Not to be attached to the geyser in any manner.
- Be suitably spaced to ensure that the drip tray does not become warped when filled half with water.
- It must be sloped to the outlet end and rigidly maintained in that position.
- the 50mm PVC adaptor must be fitted to the waste outlet on the tray and discharged to the outside of the building in a visible position.

The Vacuum Breakers, Drain Cock and Safety Valve must be within the overall confines of the geyser dimensions, so that any water leakage is captured by the drip tray. Should the pressure control valve be installed in a cupboard, the same applies.

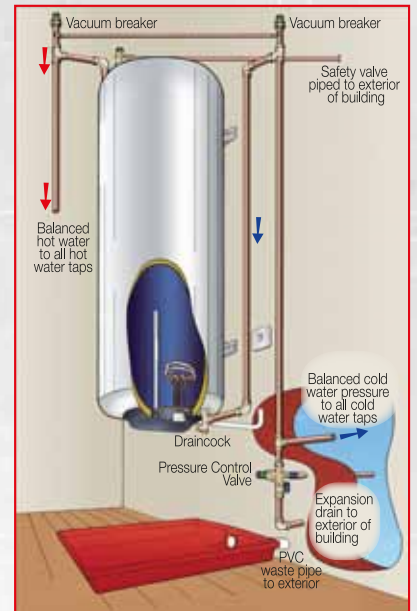

product warranty

Kwikot KwikTrays carry a one year guarantee from date of installation.

kwikot branch and website addresses:

kwikot (pty) ltd inland division

PO Box 1016 Benoni 1500
Tel: (011) 897 4600
Fax: (011) 914 4750
Domestic Sales
email: sales.inland@kwikot.com
AFTER SALES SERVICE TEL:
0861 KWIKOT (594568)

Export Sales:
email: sales.export@kwikot.com

Marketing:
email: marketing.info@kwikot.com

Technical:
email: technical.info@kwikot.com

Kwikot, first in mind, first in absolute peace of mind

kwikot (pty) ltd eastern cape division

PO Box 3082 Northend, Port Elizabeth, 6056
Tel: (041) 373 0575
Fax: (041) 373 0577
Domestic Sales
Email: sales.easterncape@kwikot.com

kwikot (pty) ltd western cape division

PO Box 443, Eppendorf, 7475
Tel: (021) 534 3691
Fax: (021) 534 1606
Domestic Sales
Email: sales.westerncape@kwikot.com

kwikot (pty) ltd kwazulu-natal division

P O Box 47366, Greyville, 4023
Tel: (031) 574 8700
Fax: (031) 574 8750
Domestic Sales
email: sales.kwazulunatal@kwikot.com

www.kwikot.com