



Established 1986

Beautiful!

Quality Marine Ply Garage Doors



Quality Garage Doors At Affordable Prices.

Van Acht offers a wide variety of garage doors to choose from. Our garage doors are made from the best quality materials which will enhance not only the aesthetic qualities of your new garage door but also durability in our harsh African climate. Our highly motivated and qualified installation teams will ensure that your doors are installed professionally.

Van Acht only uses the best quality tried and tested motors that come standard with battery back-up for those days when Eskom lets you down.



V-Tech Marine -Ply Garage Doors

The V-Tech garage door range has specifically been designed to withstand our harsh Highveld climate. Marine ply has been used as an engineering material in the marine and aviation industries since World War 2. Marine -Ply is highly resistant to fungal attacks and can withstand extended exposure to moisture hence the name 'Marine'. It is often used in the construction of boats and docks and much of its strength is due to the strong Weather and Boil Proof (WBP) glue that is used between the veneers.

Marine -Ply should not be confused with chip-board. Marine ply is made from hardwood that is cut into several layers (veneers) that are pressure bonded together with their adjacent veneer shaving their grain at right angles to each other for greater strength. Manufacturing marine ply is a time consuming and expensive process that has been perfected over the last 60 years to produce a product that will out perform and outlast virtually any wood. Garage doors are more often than not directly exposed to the elements and it is for this reason that we have chosen a material that is highly resistant to cracking, warping, shrinking, rotting and twisting.



Marine-Ply

Marine ply is also environmentally friendly because it allows for the optimization of wood.



Caravan Garage Doors Available in an overall Height of 2570mm

Double 20 Panel (CODE: GDBL20P)




Door Size: (w) 4940mm x (h) 2170mm / Opening Size: (w) 4880mm x (h) 2135mm

Double 20 panel with Polycarbonate Glass (Code: GDBL20P GT)




Door Size: (w) 4940mm x (h) 2170mm / Opening Size: (w) 4880mm x (h) 2135mm

Single 10 Panel (CODE: GSNGL10P)

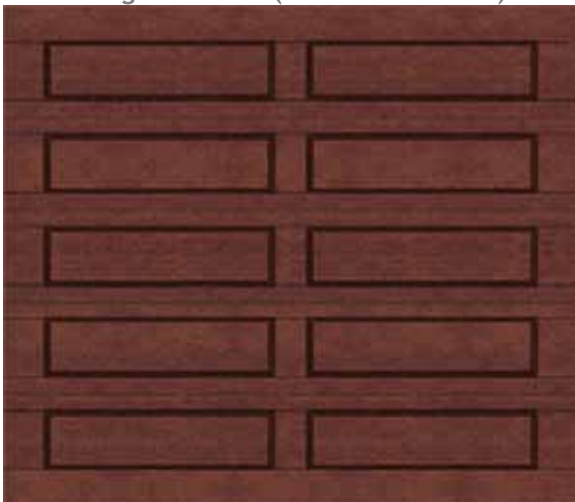

Door Size: (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Single 10 Panel with Polycarbonate Glass (CODE: GSNGL10P GT)

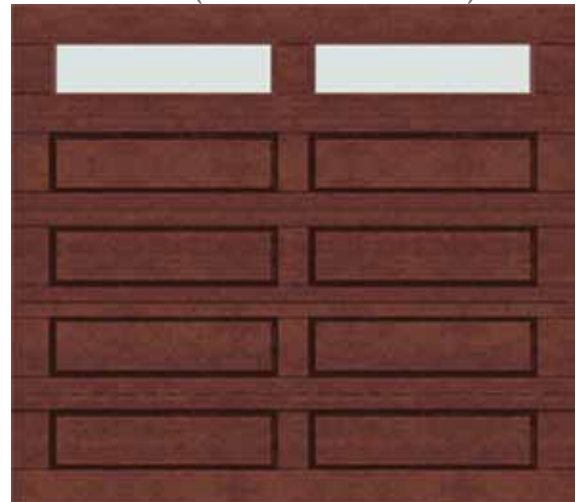

Door Size: (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

3




Double 40 Panel (CODE: GDBL40P)



Door Size: (w) 4940mm x (h) 2170mm / Opening Size: (w) 4880mm x (h) 2135mm

Double 40 Panel with Polycarbonate Glass (CODE: GDBL40P GT)

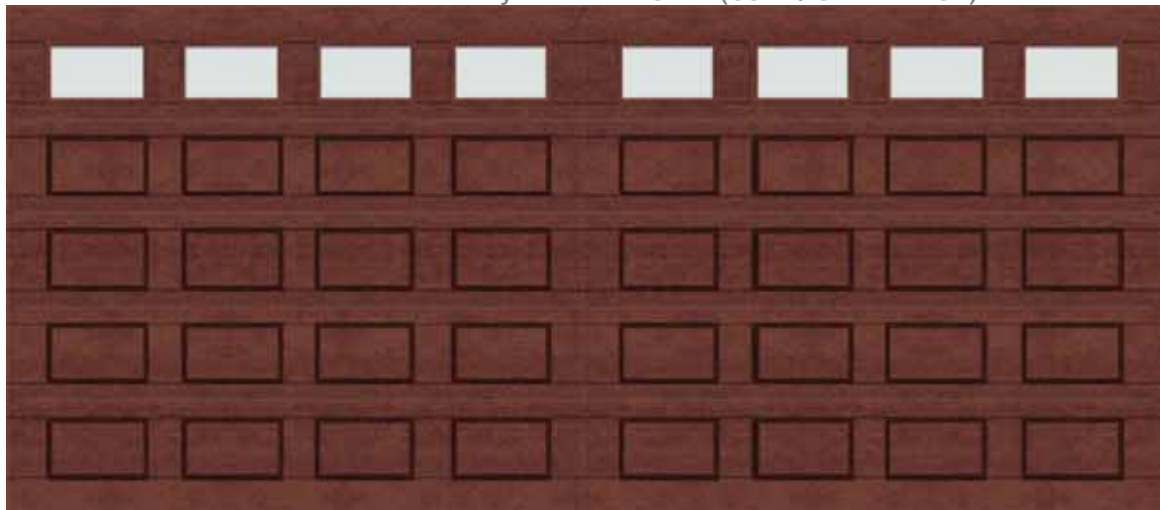

Door Size: (w) 4940mm x (h) 2170mm / Opening Size: (w) 4880mm x (h) 2135mm

Single 20 Panel (CODE: GSINGL20P)



Door Size: (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm


Single 20 Panel with Polycarbonate Glass (CODE: GSINGL20P GT)



Door Size: (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm



Double Horizontal (CODE: GDBLHOR)

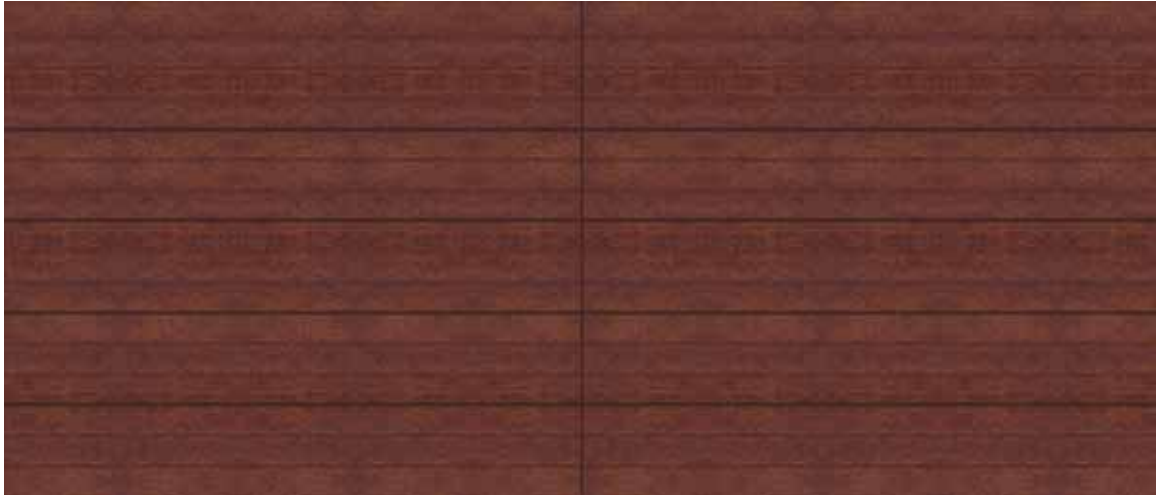

Door Size: (w) 4940mm x (h) 2170mm / Opening Size: (w) 4880mm x (h) 2135mm

Double Horizontal with Polycarbonate Glass (CODE: GDBLHOR GT)




Door Size: (w) 4940mm x (h) 2170mm / Opening Size: (w) 4880mm x (h) 2135mm

Single Horizontal (CODE: GSINGLHOR)



Door Size: (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Single Horizontal with Polycarbonate Glass (CODE: GSINGLHOR GT)

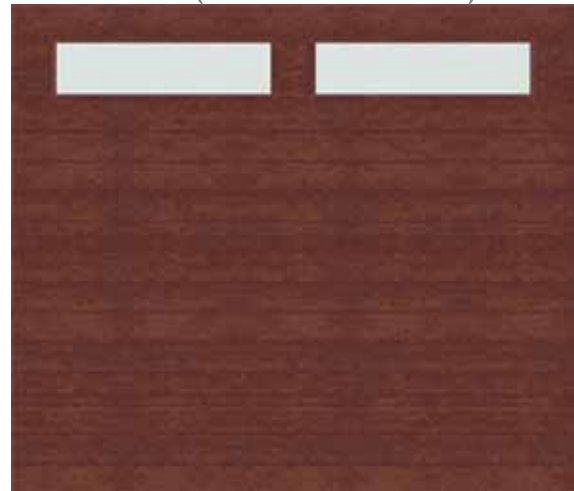

Door Size: (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm



Double Vertical Panel Arch (CODE: GDBLPAR12HHB)



Door Size: (w) 4940mm x (h) 2170mm / Opening Size: (w) 4880mm x (h) 2135mm

Double Vertical Barn (CODE: GDBI BARN)



Door Size: (w) 4940mm x (h) 2170mm / Opening Size: (w) 4880mm x (h) 2135mm

Single Vertical Panel Arch (CODE: GSINGL6PARHHB)



Door Size: (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Single Vertical Barn (CODE: GSINGLBARN)




Door Size: (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm



Caravan Garage Doors Available in an overall Height of 2570mm

Double Vertical Arch (CODE: GDBLVERTARCH)

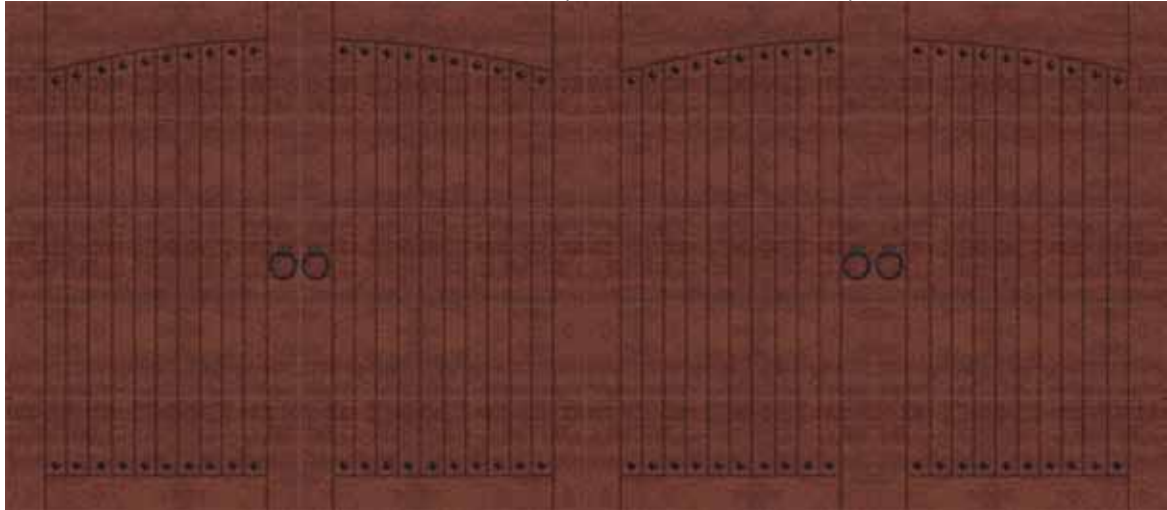


Door Size: (w) 4940mm x (h) 2170mm / Opening Size: (w) 4880mm x (h) 2135mm



7



Single Vertical Arch (CODE: GSINGLVERTARCH)

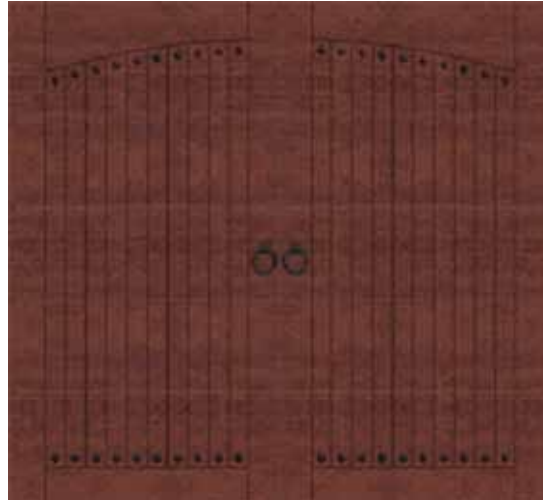

Door Size: (w) 2500mm x (h) 2170mm
Opening Size: (w) 2440mm x (h) 2135mm

Van Acht Garage doors are treated with one coat of transit sealer.

It is recommended that a further 3 coats of V-COAT or similar oil based sealant must be applied immediately after installation. Leave a 12 hour drying period between coat 1 and 2 and a 48 hour drying period between coat 2 and 3. Do not use a black stain on any garage door as it will attract excessive heat from the sun. Maintain your door by oiling it when wood looks dry. Minimum maintenance: oil once a year.




Use V-COAT for your Garage door !



Garage Door Measuring form (Double)

- Please complete the following checklist, indicate with a ✓ or ✗
- Electricity on site
- My garage is free of building material and debris
- I want installation of both garage door and motor
- I will ensure that the ceiling is fitted and screeting is finished before installation
- Manhole in ceiling for access to roof
- I am aware that I should oil my garage door regularly
- Please specify if door is Horizontal Panel Custom
- Please ensure that your garage is cleared of any building materials or debris that might hamper installation.
- Please note that if Van Acht is delayed and cannot finish the job due to any of the above mentioned issues we will charge a R450 callout fee to cover our costs.
- If measurements exceed minimum or maximum dimensions, standard garage doors cannot be fitted.

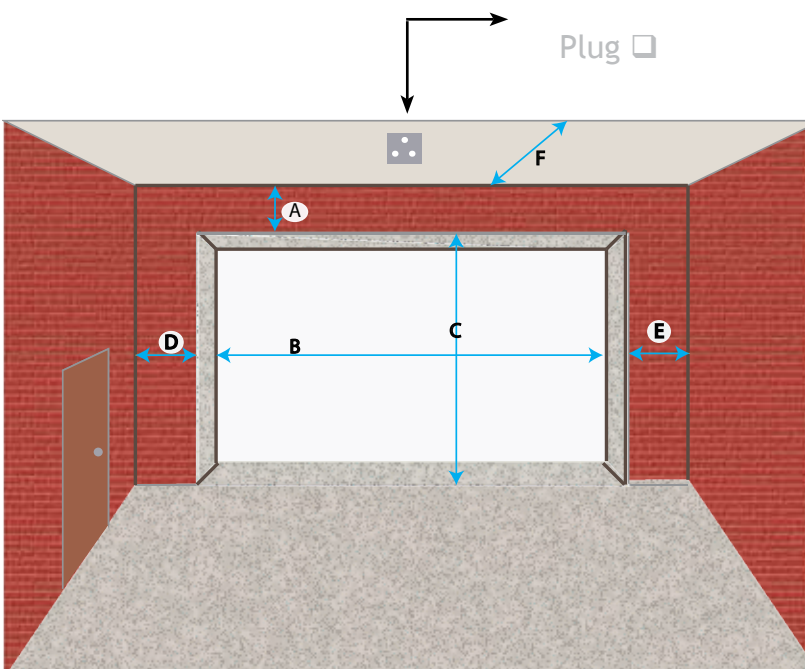

- A: Minimum 400mm
- B: Standard 4880mm
- C: Standard 2130mm
- D: Minimum 150mm
- E: Minimum 150mm
- F: Minimum 3300mm

Guarantee

All work done and charged for is guaranteed for 12 months from date of invoice. 12 month guarantee on parts and installation.

Maintenance

Your garage door needs to be serviced every 12 months, springs need tensioning and parts will need oiling. (This will help extend the life of the motor)


Name

Date

Signature

Garage Door Measuring form (Single)

- Please complete the following checklist, indicate with or
- Electricity on site
- My garage is free of building material and debris
- I want installation of both garage door and motor
- I will ensure that the ceiling is fitted and screeting is finished before installation
- Manhole in ceiling for access to roof
- I am aware that I should oil my garage door regularly
- Please specify if door is Horizontal Panel Custom
- Please ensure that your garage is cleared of any building materials or debris that might hamper installation.
- Please note that if Van Acht is delayed and cannot finish the job due to any of the above mentioned issues we will charge a R450 callout fee to cover our costs.
- If measurements exceed minimum or maximum dimensions, standard garage doors cannot be fitted.

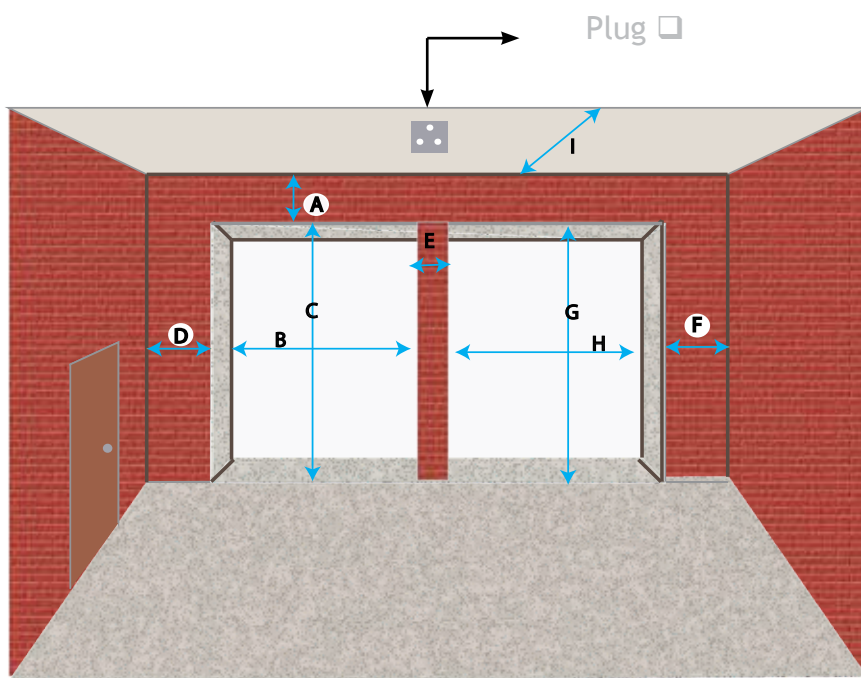

- A: Minimum 400mm
- B: Standard 2440mm
- C: Standard 2130mm
- D: Minimum 150mm
- E: Minimum 400mm
- F: Minimum 150mm
- G: Standard 2130mm
- H: Standard 2440mm
- I: Minimum 3300mm

Guarantee

All work done and charged for is guaranteed for 12 months from date of invoice. 12 month guarantee on parts and installation.

Maintenance

Your garage door needs to be serviced every 12 months, springs need tensioning and parts will need oiling. (This will help extend the life of the motor)

Name

Date

Signature

