

TEST RESULTS

MECHANICAL PERFORMANCE RESULTS - SANS 613	
DESCRIPTION	RESULTS
NEGATIVE PRESSURE	Passed 1500 Pa
POSITIVE PRESSURE	Passed 1500 Pa
WATER PENETRATION	Passed 300 Pa
STRUCTURAL	Passed 2250 Pa

APPLICATIONS

crealco Windows	HOME	MANSION	MALL	TOWER
Swift 28 window	✓			
Swift 30.5 window	✓			
Evolution window	✓	✓	✓	
Swift 34 window		✓	✓	
Swift 36 window		✓	✓	✓
Clipp 44 window			✓	
Edge thermal break window		✓	✓	✓
Serene window		✓	✓	✓

To find your nearest Crealco Distribution Partner, please visit the Crealco website at : www.crealco.co.za

This brochure must be read in conjunction with the Installation, Cleaning & Maintenance Guidelines for the relevant system. The manuals must also be used in conjunction with the design and cutting lists from the latest version of StarFront.



FEATURES

- Bottom hung open in window system.
- Can be glazed from the inside and from the outside.
- Open out top hung or side hung vents also available.
- Cottage pane configurations are available.

GLAZING

- Beaded both sides.
- Glass thickness from 4mm to 6.38mm

GASKETS & SEALS


- Standard Crealco colour coded wedges.
- Crealco approved seals.

FINISH


- Available in anodized finish.
- Available in Crealco standard colours.

HARDWARE

- Approved Crealco friction stays.
- Approved Crealco window handles.

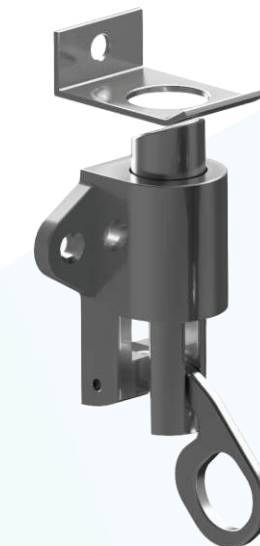

Ring pull catch doubles up as a handle

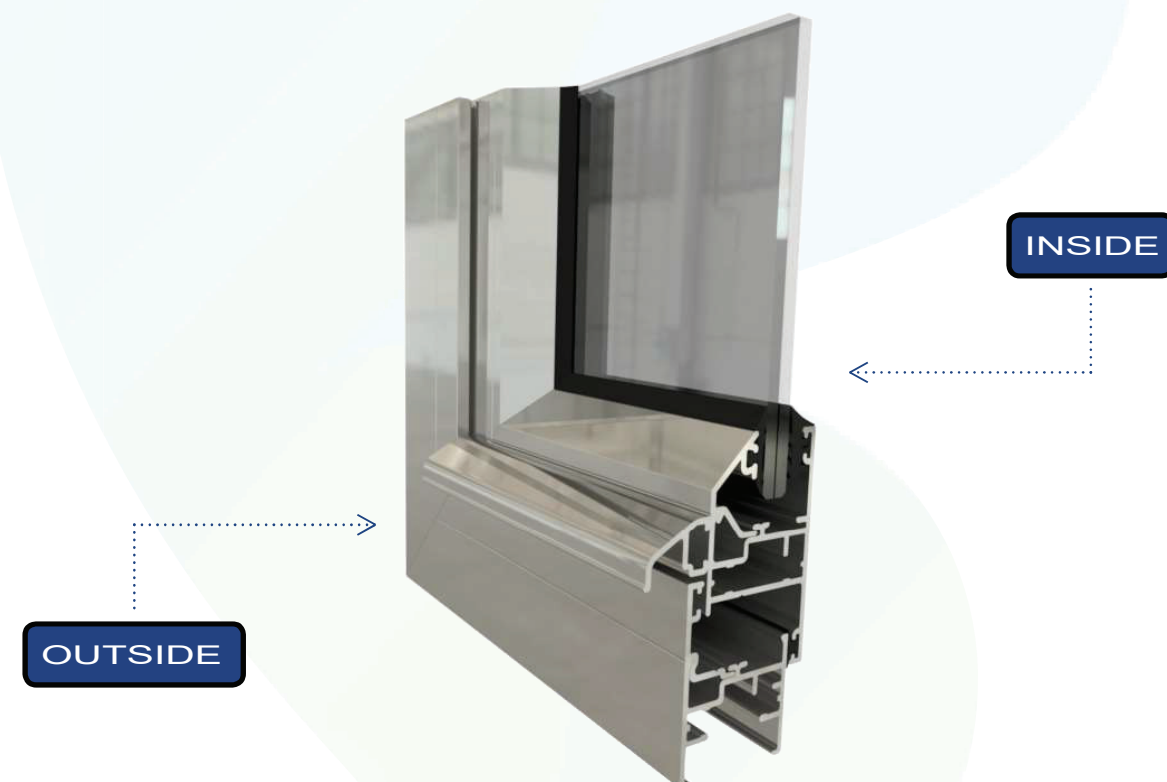

SASH LIMITATIONS	
WIDTH	HEIGHT
850mm	700mm

This brochure must be read in conjunction with the Installation, Cleaning & Maintenance Guidelines for the relevant system.
The manuals must also be used in conjunction with the design and cutting lists from the latest version of StarFront.

This brochure must be read in conjunction with the Installation, Cleaning & Maintenance Guidelines for the relevant system.
The manuals must also be used in conjunction with the design and cutting lists from the latest version of StarFront.