Solar Lights eurolux



		ÎI		<u>_</u>	
O399 pg460	0299 pg460	0177 pg461	0181 pg461	0179 pg462	0180 pg462
		P	h		T
0298 pg463	0182 pg463	0171 pg464	0172 pg464	0165 pg465	0166 pg465
Ţ			Ĩ		
0170 pg465	O168 pg465	0163 pg466	0164 pg466	0167 pg466	0162 pg466
0169 / 0175 pg467	0173 pg467	0174 pg467	H180 pg468	FS213 pg468	FS214 pg468
FS215 pg468	0190 pg469	O400 pg470	O401 pg470	O402 pg470	0403 pg470





O399

Environmentally Conscious Choice



0299


Class 2 (IP) : 20 (☆) : 1	
PRODUCT DESCRIPTION: Portable Solar Power Inverter FITTING COLOUR: GREY/YELLOW: 6007328360100 ADDITIONAL INFORMATION: Including Remate PV Solar Panel Including Portable Battery & Power Inver Including Over-Charge, Over-Discharge, Reverse Current Protection Including 2 x 30A Fuses Including 10A Adapter Including Power Cables	
	:2 Years
HEIGHT: 140mm (with handle) WIDTH: 290mm DEPTH: 225mm FITTING MATERIAL: Steel	INVERTER SPECIFICATION: Power: 500W Modified Sine Wave Including 2 x AC Outputs (1 x 10A Adapter) Including 2 x 12V 3A DC Sockets Including 1 x 92 X AD CUBS Socket Including Cable Management Including Indicator Lights Including Solar & AC Wall Power Supply
HEIGHT: 210mm WIDTH: 260mm DEPTH: 170mm FITTING MATERIAL: Plastic	BATTERY SPECIFICATION: Including 12V 100Ah Rechargeable Sealed Lead-Acid Battery
SOLAR PANEL	:10 Years
HEIGHT: 680mm WIDTH: 860mm DEPTH: 30mm CORD LENGTH: 5000mm	SOLAR PANEL SPECIFICATION: STC Power: 80W Operating Voltage: 17.2V Operating Curnent: 4.65A Open Circuit Voltage: 21.6V Short Circuit Current: 5.17A
FITTING MATERIAL:	





Solar

Environmentally Conscious Choice

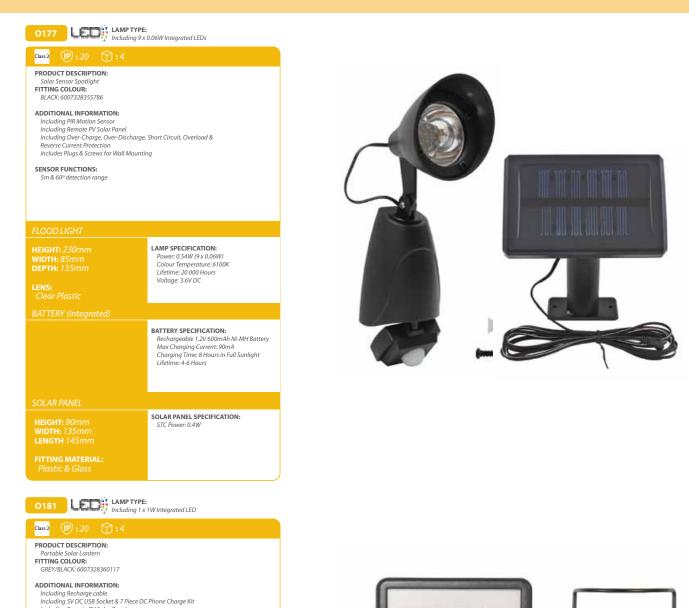



LANTERN	
HEIGHT: 240mm WIDTH: 125mm DEPTH: 125mm LENS: Opal Plastic	LAMP SPECIFICATION: Power: IW Lumens: 55Im Colour Temperature: 6100K Lifetime: 10 000 Hours Voltage: 12V DC
BATTERY (Integrated)	
	BATTERY SPECIFICATION: Rechargeable 3.7V 1600mAh Seoled Li-Jon Battery Max Charging Current: 1000mA Charging Time: 3-4 Hours in Full Sunlight Lifetime: 4 Hours (Normal), 11 hours (Energy Saving Mode)
SOLAR PANEL	
HEIGHT: 147mm WIDTH: 273mm DEPTH: 12mm FITTING MATERIAL: Plastic & Glass	SOLAR PANEL SPECIFICATION: STC Power: 3W Operating Voltage: 4V Operating Current: 530mA Open Circuit Voltage: 7.1V Short Circuit Current: 600mA



Class 2 IP:50 1:4







DESCRIPTION: Solar Liaht Kit FITTING COLOUR: BLACK/ORANGE: 6007328355809 ADDITIONAL INFORMATION: ADDITIONAL INFORMATION: Including 2 x 1.5W DC LED tubes Including 7 Piece DC Phone Charging Kit Including 7 Piece DC Phone Charging Kit Including Oxer-Charge, Oxer-Discharge, Short Circuit, Overload & Reverse Current Protection Each Jamp oced has in ling outifh Each lamp cord has in-line switch HEIGHT: 305mm WIDTH: 24mm DEPTH: 30mm LAMP SPECIFICATION: Power: 2 x 1.5W (16 x 0.09W) Lumens: 130lm per lamp Colour Temperature: 6100K Lifetime: 20 000 Hours Voltage: 8 ~ 18V HEIGHT: 305mm WIDTH: 24mm DEPTH: 30mm POWER PACK SPECIFICATION: Including 11.1V 1.35Ah Sealed Lithium Including 11.19.1.53An Seared Lithium Rechargeable Battery Max Charging Current: <= 1A Charging Time: 4.5 Hours in Full Sunlight Lifetime: 8 Hours (1 Lamp), 4 Hours (2 Lamps) Dud On/Off Switch (1 Lamp On, 2 Lamps On) Including Indicator Light (P):67 :10 Years SOLAR PANEL SPECIFICATION: STC Power: 5W Operating Voltage: 17V Operating Current: 0.29A Open Circuit Voltage: 21.6V Short Circuit Current: 0.34A

O180

Image of the term of term o

r TING MATERIAL: lastic	Lifetime: 8 Hours (2 Lamp), 4 Hours (4 Lamps) Dual On/Off Switch (2 Lamp On, 4 Lamps On) Including Indicator Light		
DLAR PANEL	(IP) : 67 : 10 Years		
EIGHT: 305mm IDTH: 24mm EPTH: 30mm TTING MATERIAL: Numinium & Glass	SOLAR PANEL SPECIFICATION: STC Power: 10W Operating Voltage: 17V Operating Current: 0.58A Open Circuit Voltage: 21.6V Short Circuit Current: 0.68A		







Environmentally Conscious Choice



Class 2 (P):50 (12):12		
DESCRIPTION: Solar Light Kit FITTING COLOUR: BLACK: 6007328350124 ADDITIONAL INFORMATION: Including 2 x 0.9W DC LED globes Including Remote Battery Power Pack Including Semote Battery Power Pack Including Sty DC USB socket & 7 piece DC phone charging kit Including Over-Charge, Over-Discharge, Short Circuit, Overload & Reverse Current Protection Each 4m Iamp cord has an in-line switch		
LAMP		
HEIGHT: 105mm DIAMETER: 60mm LENS: Diffused Plastic	LAMP SPECIFICATION: Power.0.9W per Lamp Lumens: 80Im per lamp Colour Temperature: 6100K Lifetime: 30 000 Hours Voltage: 13.5V	
POWER PACK		
HEIGHT: 124mm WIDTH: 80mm DEPTH: 30mm FITTING MATERIAL: Plastic	POWER PACK SPECIFICATION: Including 3.7V 4000Ah Sealed Li-Jon Rechargeable Battery Max Charging Current: 1000mA Charging Time: 7-8 Hours in Full Sunlight Lifetime: 14 Hours (1 Lamp), 7 Hours (2 Lamps) Dual On/Off Switch (1 Lamp On, 2 Lamps On) Including Indicator Light	
SOLAR PANEL		
HEIGHT: 273mm WIDTH: 147mm DEPTH: 12mm FITTING MATERIAL: Aluminium & Glass	SOLAR PANEL SPECIFICATION: STC Power: 3W Operating Voltage: 4V Operating Current: 530mA Open Circuit Voltage: 7.1V Short Circuit Current: 600mA	





Environmentally Conscious Choice






0182

Class 2 (IP): 50 (1): 4 DESCRIPTION: Solar Light Kit FITTING COLOUR: YELLOW/BLACK: 6007328355823 ADDITIONAL INFORMATION: ADDITIONAL INFORMATION: Including 4 x Lampshades & Hooks Including 4 x Lampshades & Hooks Including Extension Cable Including Remote PV Solar Panel & Remote Battery Power Pack Including 7 Piece DC Phone Charging Kit Including 5 Crews & Plugs for Wall Mounting Including Over-Charge, Over-Discharge, Short Circuit, Overload & Reverse Current Protection Each Lamp cord has in-line switch HEIGHT: 305mm WIDTH: 24mm DEPTH: 30mm LAMP SPECIFICATION: AMP SPECIFICATION: Power: 4 x 1.2W (6 x 0.05W) Lumens: 90Im per lamp Colour Temperature: 6100K Lifetime: 20 000 Hours Voltage: 8 ~ 18V HEIGHT: 305mm WIDTH: 24mm DEPTH: 30mm POWER PACK SPECIFICATION: Vover PARC SPECIFICATION: Including 11.1V2.7Ah Sealed Lithium Rechargeable Battery Max charging current: <= 1A Charging Time: 4.5 hours in Full Sunlight Lifetime: 11 hours (2 lamp), 5 hours (4 lamps) Dual On/OT switch (2 lamp on, 4 lamps on) Including indicator light (P):67 : 10 Years SOLAR PANEL SPECIFICATION: SOLAR PANEL SPECIFICATIO STC Power: 10W Operating Voltage: 17V Operating Current: 0.68A Open Circuit Voltage: 21.6V Short circuit current: 0.68A












0171 LAMP TYPE: Including 3 x Integrated 0.06W LEDs

HEIGHT: 335mm RADIUS: 145mm

DESCRIPTION: Solar Garden Spike FITTING COLOUR: SATIN CHROME: 6007328349624 ADDITIONAL INFORMATION:

LUDI IUNAL INFORMATION: Lights turns on automatically when dark Including 1 x AA 1.2V 600mAh Rechargeable Battery On/Off Switch No Wiring Required Tiltable Head

Environmentally Conscious Choice







319 mm

0172 LAMP TYPE: Including 3 x Integrated 0.06W LEDs

HEIGHT: 310mm DIAMETER: 87mm


DESCRIPTION: Solar Garden Spike FITTING COLOUR: BLACK: 6007328349631

ADDITIONAL INFORMATION: LUDTIONAL INFORMATION: Lights turns on automatically when dark Including 1 x A1.2V 600mAh Rechargeable Battery On/Off Switch No Wiring Required Tiltable Head

NEU III



Environmentally Conscious Choice

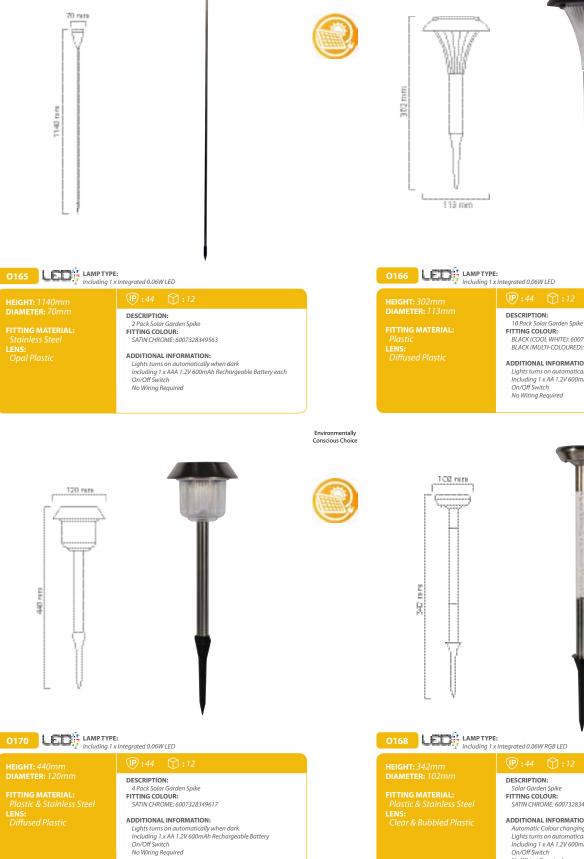

Environmentally

Conscious Choice

56	L EDX	LAMP TYPE: Including 1 x Integrated 0.06W LED
	A second s	Including 1 x Integrated 0.06W LED

BLACK (COOL WHITE): 6007328349570 BLACK (MULTI-COLOURED): 6007328355854

ADDITIONAL INFORMATION: Lights turns on automatically when dark Including 1 x AA 1.2V 600mAh Rechargeable Battery On/Off Switch No Wiring Required

> Environmentally Conscious Choice




DESCRIPTION: Solar Garden Spike

SATIN CHROME: 6007328349594

ADDITIONAL INFORMATION: Automatic Colour changing Lights turns on automatically when dark Including 1 x AA 1.2V 600mAh Rechargeable Battery On/Off Switch No Wiring Required

www.eurolux.co.za | 465



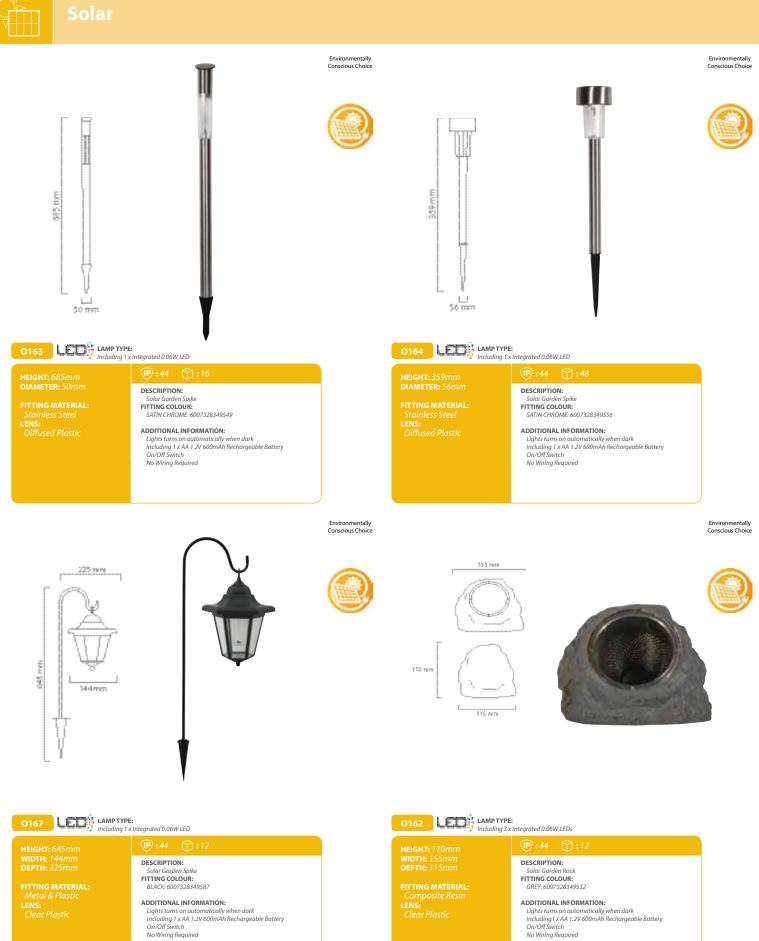






0173 LAMP TYPE: Including 100 x Integrated 0.06W LEDs

DESCRIPTION: 100 Piece Solar Fairy Light String FITTING COLOUR: MULTI-COLOURED: 6007328349648

ADDITIONAL INFORMATION: Lights turns on automatically when dark Including Solar Spike with 2 x AA 1.2V 600mAh Rechargeoble Batteries On/Off Switch

Environmentally Conscious Choice

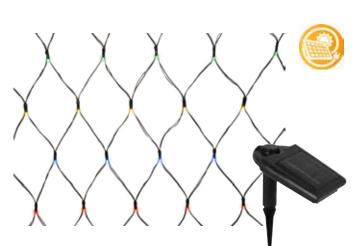

0174 LAMP TYPE: Including 105 x Integrated 0.06W LEDs

O169 / O175

DESCRIPTION: 50 Piece Solar Fairy Light String FITTING COLOUR:

ADDITIONAL INFORMATION:

OPERATING FUNCTIONS: On/Off & Flashing

WHITE(O169): 6007328349600 MULTI-COLOURED(O175): 6007328349662

Lights turns on automatically when dark Including Solar Spike with 1 x AA 1.2V 600mAh Rechargeable Battery On/Off Switch

HEIGHT: 1100mm
WIDTH: 2100mm
LEAD LENGTH: 2000mm

₩ :44 U : 12	
DESCRIPTION: 105 Piece Solar Fairy Net	
FITTING COLOUR:	
MULTI-COLOURED: 6007328349655 BLUE: 6007328356967	

ADDITIONAL INFORMATION: Lights turns on automatically when dark Including Solar Spike with 2 x AA 1.2V 600mAh Rechargeable Batteries

OPERATING FUNCTIONS: On/Off & Flashing





H180 LAMP TYPE: Including 7 x 0.06W (0.4W) Integrated LEDs

DESCRIPTION:

Solar LED Light FITTING COLOUR: GREEN: 6007328364146

ADDITIONAL INFORMATION:

Water Resistant Charge Time: 8 - 10 Hours Battery Life: 5 - 6 Hours

Including Rechargeable Batteries Solar Panel: 5V 60mA

On/Off Switch Automatically Turns On At Night Including Hanging Hook

LENGTH: 165mm DIAMETER: 100mm

Environmentally Environmentally Conscious Choice Conscious Choice Te. of. 2.0 int. plotes stoled 01 5 -6end. 3 Out. 61

FS213 LAMP TYPE: Including 24 x 0.08W (2W) Integrated LEDs

HEIGHT: 40mm DIAMETER: 120mm

Solar I FD Dis FITTING COLOUR: RED: 6007328371021 ADDITIONAL INFORMATION: Including 6V 1W Poly Solar Panel Rechargeable 3.7V 1.2Ah Sealed Lithium-ion Battery

Class 2 IP : 20 🕥 : 40

DESCRIPTION:

Including Dim & Bright Functions Battery Life: 3 - 4 Hours (Bright) 6 - 7 Hours (Dim) Charge Time: 24 Hours Including DC Socket Can be Charged by Solar Panel or Mobile Charger Including Stand

LAMP SPECIFICATION: Power: 2W (24 x 0.08W) Luminous Flux: 120lm Colour Temperature: 6400K Lifetime: 30 000 Hours Beam Angle: 120°

Environmentally Conscious Choice



1

10

0 0



FS214 LAMP TYPE: Including 36 x 0.06W 6V DC Integrated LEDs

	Class 2
AMETER: 120mm	DESCRIPTION: Solar LED Lant
ITING MATERIAL: lastic NS MATERIAL:	FITTING COLOU RED: 60073283
lear Plastic	ADDITIONAL IN Including 6V 0. Rechargeable - Battery Life: 6 - Battery Charge Mounted Dimr
	Including DC S Can be Charge Including Char Including Hang

tern UR: 3371045

NFORMATION: 0.75W Poly Solar Panel 24V 2000mAh Sealed Lead-Acid Battery - 8 Hours ge Time: 24 Hours Switch Socket ed by Solar Panel or Mobile Charger rge Light

I AMP SPECIFICATION:

Power: 2W (36 x 0.06W) Luminous Flux: 180Im Colour Temperature: 6400K Lifetime: 30 000 Hours Beam Angle: 360°



Environmentally Conscious Choice



FS215 LAMP TYPE 1: Including 3 x 1W Integrated LEDs (Lantern) LAMP TYPE 2: Including 1 x 1W Integrated LED (Torch)

ADDITIONAL INFORMATION: Including 6V 0.75W Poly Solar Panel Rechargeable 4V 1.2Ah Sealed Lead-Acid Battery Battery Life: 5- 6 Hours (Lantern), 8-10 Hours (Torch) Battery Charge Time: 24 Hours Including DC Socket Can be Charged by Solar Panel or Mobile Charger Including Hanging Hook

LAMP SPECIFICATION:

Power: 3W (3 x 1W or 1 x 1W) Luminous Flux: 270lm Colour Temperature: 6400K Lifetime: 30 000 Hours Beam Angle: 30° (Torch), 120° (Lantern)

Class 2 (IP): 20 (1): 50

DESCRIPTION:

Solar LED Utility Liaht

FITTING COLOUR: RED: 6007328371069







Carl a fee

.

18

Environmentally Conscious Choice





HEIGHT: 360mm DIAMETER: 275mm

FITTING MATERIAL Plastic DESCRIPTION: Solar Lantern FITTING COLOUR: BLUE: 6007328364788 GREEN: 6007328364795 PINK: 6007328364801 WHITE: 6007328364818

ADDITIONAL INFORMATION: Including 1 x AAA 1.2V 600mAh Rechargeable Battery On/Off Switch No Wiring Required





Environmentally Conscious Choice







WIDTH: 995mm **DEPTH:** 40mm

FITTING COLOUR: SILVER: 6007328369899 ADDITIONAL INFORMATION: All Ratings at: STC a 1000W/m² AM 1.5 spectrum 25° C

Class 2 (IP): 67 😭: 1 : 3 Years

SOLAR PANEL SPECIFICATION: STC Power: 80W Operating Voltage: 17.2V Operating Current: 4.65A Open Circuit Voltage: 21.6V Short circuit current: 5.71A

Environmentally Conscious Choice



Class 2 (IP): 67 😭: 1 : 3 Years

FITTING COLOUR: SILVER: 6007328369790

ADDITIONAL INFORMATION: All Ratings at: STC a 1000W/m² AM 1.5 spectrum 25° C

SOLAR PANEL SPECIFICATION:

STC Power: 50W Operating Voltage: 17.2V Operating Current: 2.91A Open Circuit Voltage: 21.6V Short circuit current: 2.23A







Environmentally

Conscious Choice



FITTING COLOUR: SILVER: 6007328369912

Class 2 🕕 : 67 🕥 : 1 🔡 : 3 Years

ADDITIONAL INFORMATION: All Ratings at: STC a 1000W/m² AM 1.5 spectrum 25° C

SOLAR PANEL SPECIFICATION: STC Power: 200W Operating Voltage: 34.4V Operating Current: 5.81A Open Circuit Voltage: 43.2V Short circuit current: 6.5A

Class 2 🕕 : 67 🕥 : 1 🔡 : 3 Years FITTING COLOUR: SILVER: 6007328369905

ADDITIONAL INFORMATION: All Ratings at: STC a 1000W/m² AM 1.5 spectrum 25° C SOLAR PANEL SPECIFICATION:

STC Power: 100W Operating Voltage: 17.2V Operating Current: 5.81A Open Circuit Voltage: 21.6V Short circuit current: 6.46A