



WASHROOM SYSTEMS

Metering Taps and Mixers

Product Range 2011

WASHROOM
SYSTEMS



FRANKE

FRANKE KITCHEN SYSTEMS (PTY) LTD

CALL CENTRE

TEL: 0861 372 653

FAX: (+27-31) 450 6302

e-mail: enquiry.fsa@franke.com

Website: www.franke.co.za

DURBAN

1194 South Coast Road,

Mobeni, Durban, 4092.

South Africa.

TEL: (+27-31) 450 6300

FAX: (+27-31) 450 6303

GAUTENG

77 Roan Crescent,

Sage Corporate Park North,

Old Johannesburg Road,

Midrand, 1682

South Africa

CAPE TOWN

Sales Office,

Franke Kitchen Systems

M5 Business Park, Unit 14, 2nd Floor,

Eastman Road, Maitland

Cape Town, 7405

South Africa

Showroom,

M5 Business Park

Unit 2A, Block A

Eastman Road, Maitland

DISCLAIMER


The information and data supplied in this brochure is based on information believed to be reliable, however it is not binding and inaccuracies may occur. Franke reserves the right to change specifications and design at any time without notice.

© 2010 by Franke Kitchen Systems (Pty) Ltd. All rights reserved under the Copyright Act of 1987 with amendments. Reproduction of any of the content, full or partial, is allowed only with the prior written approval of Franke Kitchen Systems (Pty) Ltd. No reasonable requests will be refused provided conditions as laid out are met.

All information provided in this brochure is for informational purposes only. All information, text, technical drawings and images are the exclusive property of Franke. The content herein may not be reproduced in whole or part. Any use of the content without written permission from Franke is prohibited.

**WASHROOM
SYSTEMS**



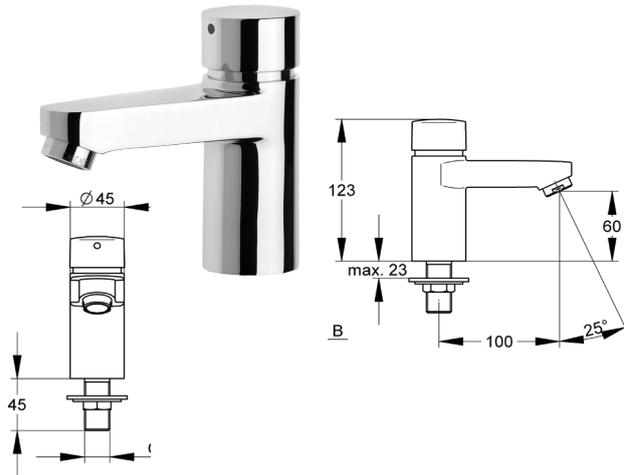

AQUALINE-C Self-Closing Pillar Tap AQUA203

Noise group I, for wash systems, with aerator and integrated flow controller. Optionally for connecting to cold water or premixed warm water.


Self-closing functional cartridge, piston-free design, with automatic and backlash-free closure. Adjustable flow duration. Full metal construction, with twist-proof operating element, polished chromium-plated brass.

Technical specifications

Minimum flow pressure:	1.0 bar
Calculation flow rate:	0.10 l/s
Volumetric flow:	0.10 l/s at a flow pressure of 3 bar
Flow time:	1–15 adjustable
Sound insulation:	Noise group I

Self-closing pillar tap

359745

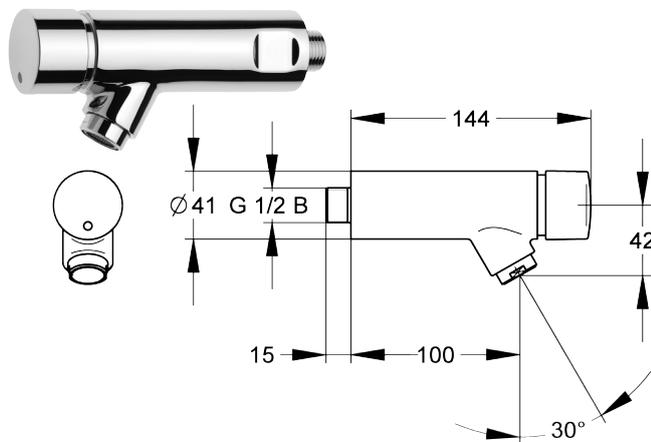

AQUALINE-S Self-Closing Bib Tap AQUA205

Noise group I, for wash systems, with angled outlet and aerator with flow straightener. Optionally for connecting to cold water or pre-mixed warm water.


Self-closing functional cartridge, piston-free design, with automatic and backlash-free closure. Adjustable flow duration. Full metal construction, polished chromium-plated brass.

Technical specifications

Minimum flow pressure:	1.0 bar
Calculation flow rate:	0.10 l/s
Volumetric flow:	0.10 l/s at a flow pressure of 3 bar
Flow time:	1–'9615 s adjustable
Sound insulation:	Noise group I

Self-closing bib tap

359743

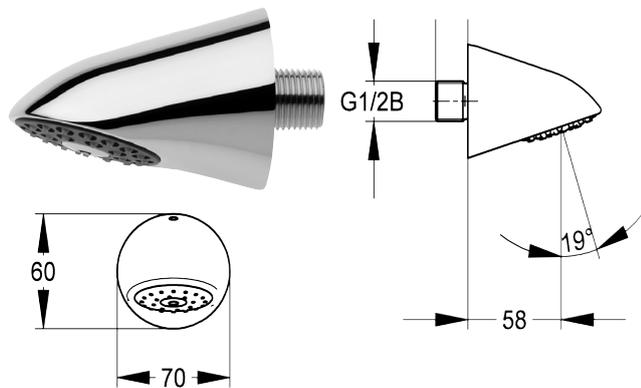


AQUAJET-Slimline AQUA750

AQUAJET-Slimline shower head DN 15 with plastic jet face with calcification system and pluggable connection spigot. Shower head housing with anti-twist feature. Polished chromium-plated brass.

6lt per minute flow rate

359747

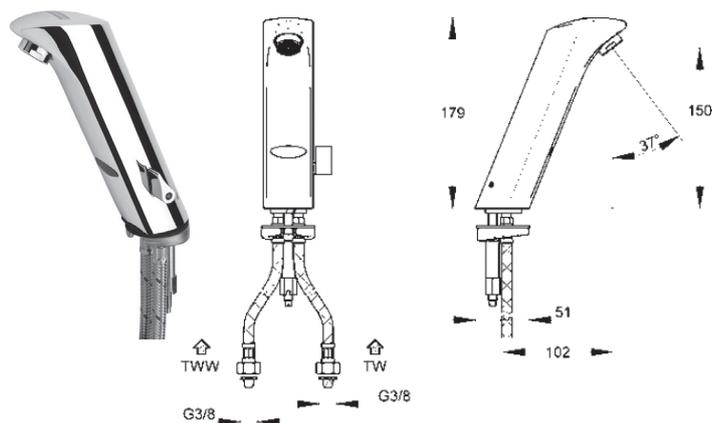


Protronic-S AQUA130

PROTRONIC-S mains-independent, opto-electronically-controlled washbasin mixer DN15 with theft-proof aerator with integrated flow rate regulator.

Washbasin mixer with battery operation

359746

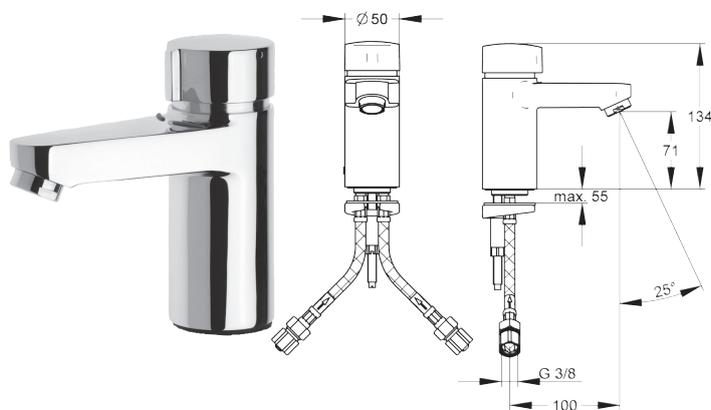

AQUAMIX-C Self-Closing Hot/Cold Mixer AQUA202


For wash systems, as a basin mixer with aerator with integrated flow controller. For connecting to the hot and cold water supply. Self-closing mixing cartridge, piston-free design, with automatic and backlash-free closure. Adjustable flow duration. With finely adjustable and twist-proof temperature stop. Full metal construction, polished chromium-plated brass. Optionally with connecting hoses or connecting pipes, connecting pieces with integrated non-return valves and dirt strainers.

Technical specifications

Minimum flow pressure:	1.0 bar
Calculation flow rate:	DW 0.07 l/s; DWW 0.07 l/s
Volumetric flow:	0.10 l/s at a flow pressure of 3 bar
Flow time:	1-15 adjustable

Self-closing single mixer

359748

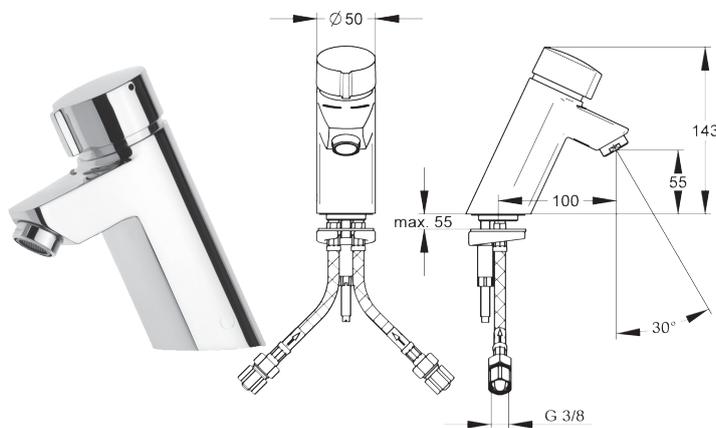

AQUAMIX-S Self-Closing Hot/Cold Mixer AQUA200


For wash systems, as a basin mixer with aerator with integrated flow controller. For connecting to the hot and cold water supply. Self-closing mixing cartridge, piston-free design, with automatic and backlash-free closure. Adjustable flow duration. With finely adjustable and twist-proof temperature stop. Full metal construction, polished chromium-plated brass. Optionally with connecting hoses or connecting pipes, connecting pieces with integrated non-return valves and dirt strainers.

Technical specifications

Minimum flow pressure:	1.0 bar
Calculation flow rate:	DW 0.07 l/s; DWW 0.07 l/s
Volumetric flow:	0.10 l/s at a flow pressure of 3 bar
Flow time:	1-15 adjustable

Self-closing single mixer

359749

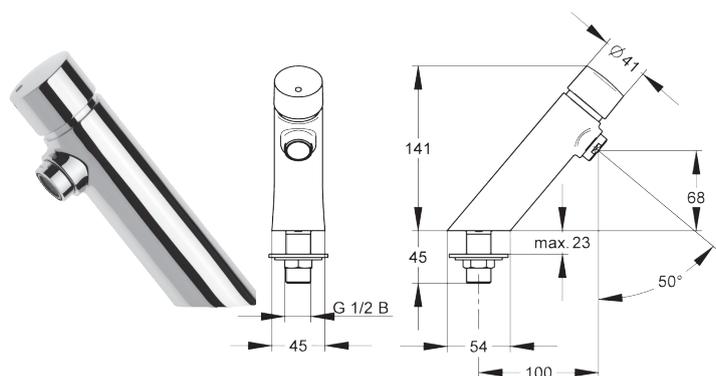

AQUALINE-S Self-Closing Pillar Tap AQUA201

Noise group I, for wash systems, with aerator and flow straightener. Optionally for connecting to cold water or pre-mixed warm water. Self-closing functional cartridge, piston-free design, with automatic and backlash-free closure. Adjustable flow duration. Full metal construction, polished chromium-plated brass.

Technical specifications

Minimum flow pressure:	1.0 bar
Calculation flow rate:	0.10 l/s
Volumetric flow:	0.10 l/s at a flow pressure of 3 bar
Flow time:	1-15 adjustable
Sound insulation:	Noise group I

Self-closing pillar tap

359744