

PRODUCT GUIDE



A member of the



THE NAME FOR WORLD CLASS METAL ROOFING SYSTEMS

Safintra roll-forms metal sheeting for the most innovative design demands and challenging structural requirements, offering a wide variety of profiles to suit the full spectrum of our client's needs.

STEEL ROOFING IS ENVIRONMENTALLY RESPONSIBLE

Steel roofing is the preferred choice for professionals on the cutting edge of green building innovations. It enables a wide range of solutions that make buildings more energy efficient, less costly to construct, less wasteful to occupy and therefore more sustainable.

Steel is 100% recyclable, and steel construction requires less material than most because of its high strength to weight ratio, thus saving resources.

BRANCHES:

Johannesburg, Cape Town, Durban, Port Elizabeth, Polokwane, Nelspruit, Bloemfontein. www.safintra.co.za
Further branches throughout SADC, Southern and Eastern Africa. www.safintra.com

A member of the



SAFINTRA PRODUCTS

Safintra manufactures the trusted and proven **Saflok 700®** concealed fix system for wider sheet coverage, and **Saflok 410®** for challenging wind load conditions.

The **Newlok®** standing seam profile outperforms any other on the market, for wind performance and ease of installation.

Our exclusive pierced fix profiles include **Widedek®**, **Trimflute®** and **Fluteline®**, plus **Classicorr Corrugated®** and **Tufdek IBR®**. Safintra also manufactures the attractive **Versatile®** profile which combines the structural benefits of a continuous steel sheet with the aesthetic appeal of tile.



COMPLETE ROOFING SOLUTIONS

Safintra also fabricates and sells roofing accessories and related products. These include flashings (for ridges, wall and barge applications), **Cleardek®** multi-wall polycarbonate sheet products and performance-tested **Fixtite®** fasteners. **S-5!®** clamps are suitable for almost any attachment of panels and other fixtures onto metal roofs.

TECHNICAL SERVICE AND SUPPORT

We offer full technical support services at all our roll forming operations. Working with our accredited roofing installers, we will offer warranties on installation (T & C apply).



INDEX



Concealed Fix Roofing Systems	2
Saflok 700	3
Saflok 410	7
Newlok	11
Concealed Fix Flashings and Closures	15
Pierced Fix Roofing Systems	18
Classicorr Corrugated	19
Tufdek IBR	21
Widedek	23
Fluteline	25
Trimflute	27
Pierced Fix Flashings and Closures	29
Pierced Fix Tile Profile Roofing System	31
Versatile	31
Bullnosing and Cranking	33
General Notes	35
Additional Services	36
Pre-engineered and Specialist Products	38
Fixtite Fasteners	39
Cleardek Multiwall Polycarbonate Sheeting Systems	41
S-5-K Grip Clamp	41
S-5-H90 Clamp	47
S-5! CorruBracket	49
S-5! TrapBracket	51
S-5! ProteaBracket	53
S-5-PV Kit and EdgeGrab	55
Materials	57
ZincAl	57
ColorPlus	57

CONCEALED FIX ROOFING SYSTEMS



CONCEALED FIX FLASHINGS AND CLOSURES

PRODUCT DESCRIPTION & FEATURES

Concealed-fix roofing, also referred to as secret fix, is designed for very low pitched roofs. Because clips under the sheet hold it down, the sheet is not punctured with fasteners, and remains completely watertight even at a very low slope. The securing clips are pre-fixed into the purlins and the sheet is mechanically snapped onto the clip.

As a concealed fix sheet can also expand and contract over the clips as the temperature changes, this system is ideal for long spans on industrial, commercial and retail buildings.

The Saflok 700® concealed fix roofing system is an interlocking trapezoidal rib profile that can be rolled on site in lengths of up to


120 metres.

Saflok 700® may be rolled in Aluminium - Zinc coated steel, (bare or colour coated) or Aluminium (Mill Finish or G4 Colortech).

On high slope roofs, the aesthetics of Saflok may be affected by occasional oil canning in the pans. This becomes visually apparent on slopes greater than 5 degrees, as the roof material becomes increasingly visible. It does not affect the structural integrity of the sheet in any way, and Safintra will not entertain claims made for oil canning.

Saflok 700® can be curved or bullnosed to a minimum internal radius of 450mm - 500mm. Reverse cranking is not possible.

Further literature may be found at www.safintra.co.za.

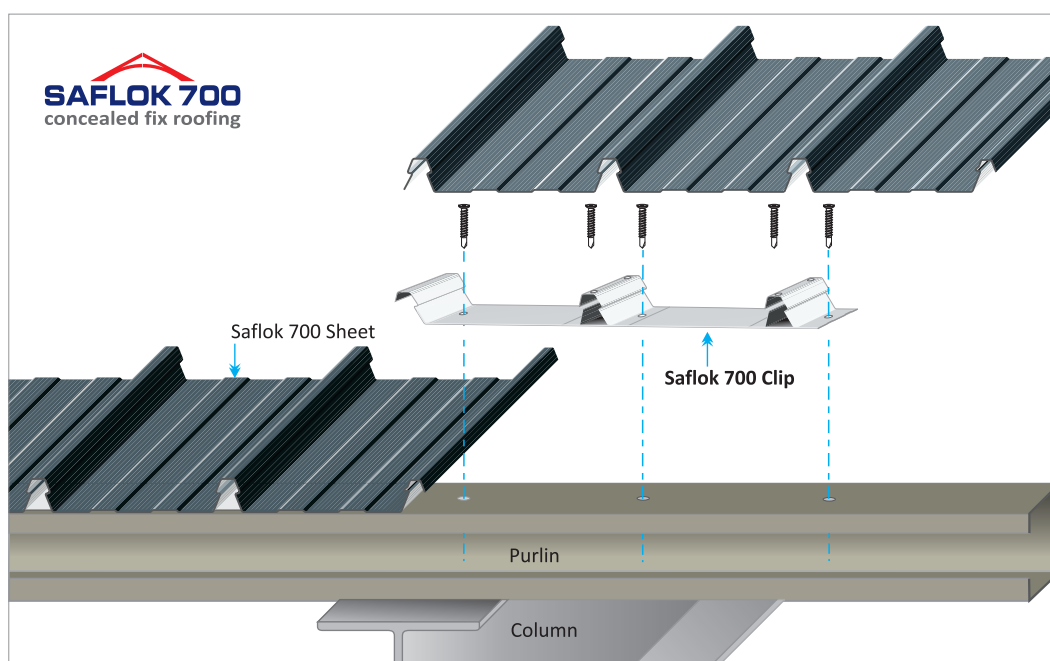


NEW SAFLOK 700 CLIP



The fully interlocking SAFLOK 700 clip incorporates two anchors to clasp the two inner ribs and a dual action component to positively hold down the male-female joint.

1. Stiffener ribs on 0,8mm baseplate add formidable strength, specifically over the goose-neck
2. Full width engagement on the goose-neck male joint
3. 5 fastening points for stability, particularly over blanket insulation
4. Engineer-designed geometry of anchor unit for optimal performance under high wind loads and foot traffic
5. Entire clip is manufactured from Aluminium - Zinc coated steel for compatibility with sheeting

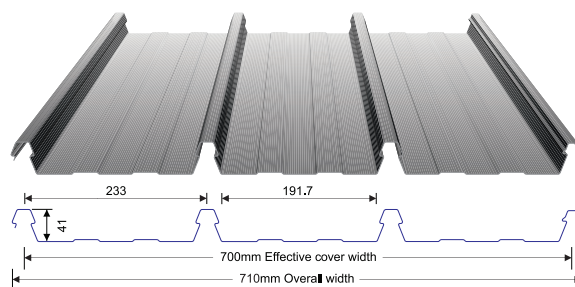

MATERIAL OPTIONS

Aluminium - Zinc	Gauge (mm)
AZ100/150/200 G550	0.50 0.55
Unpainted or pre-painted	
Aluminium	Gauge (mm)
Aluminium Mill Finish	0.80
Aluminium G4 Colortech	0.80

Other gauges are available on special request.

SAMPLE SPECIFICATION

Safintra 0,50mm thick SAFLOK 700 Colorplus® AZ150 interlocking roof sheeting fixed to steel internal purlins at 2000mm, and ridge/eaves purlins at 1700mm centres using SAFLOK 700 clips which must be screw fixed to steel purlins with Fixtite® or Safintra approved wafer head self-tapping screws. The sheeting will be a double interlocking concealed fix SAFLOK 700 profile as manufactured by Safintra Roofing, roll formed in continuous lengths from certified G550 steel or aluminium 3004 H14. The profile shall be roll formed with 4 ribs and centres not exceeding 233mm and a cover width not exceeding 700mm. The male rib is to include spurs to ensure a double interlocking action with adjacent sheets. The minimum sheet depth will be 41mm. Two stiffening ribs are incorporated in each pan. We do not recommend using Saflok on a roof pitch exceeding 5 degrees due to the possibility of oil canning.

PURLIN SPACINGS

GAUGE	0.5mm	0.55mm	0.8mm
MATERIAL	ALUMINIUM-ZINC	ALUMINIUM-ZINC	ALUMINIUM
ROOFS	mm	mm	mm
Single Span	1 400	1 700	1 400
End Span	1 600	1 900	1 500
Internal/Double Span	1 800	2 100	2 000
Cantilever (Unstiffened)	150	150	180
Cantilever (Stiffened)	350	300	380
SIDE CLADDING			
Single Span	2 100	2 300	1 600
End Span	2 400	2 600	2 200
Internal Span	2 600	2 700	2 400
Cantilever	300	400	300
Approximate Mass/m ²	5.2kg	6.2kg	2.9kg

Saflok 700 clips are calculated at 330g per clip - require approximately 1.5 clips per m².

Span tables are for SAFLOK 700 with light foot traffic only. Span tables are based on 1.5kN downward point load, 1.6kPa upward pressure and 0.75kPa for the side cladding, inward or outward. The span tables are maximum recommended spans based on buildings up to 10m high in Region B, Terrain Category B.

For further clarity on terrain categories, and wind speeds, please refer to the Safintra Design and Installation Manual (specifically pages 5,6 and 10,11).

Note:

It is important to reduce purlin spacings by 20% when spring curving a roof.



LENGTHS & ROOF PITCH

SAFLOK 700 can be ordered in any practical length as per customer requirements. On site rolling is recommended for lengths in excess of 13 metres. The minimum roof pitch when using SAFLOK 700 is 2° on steel and 3° on wood.

DRAINAGE TABLE


DRAINAGE TABLE	ROOF SLOPE				
RAINFALL INTENSITY MM/HOUR	2°	3°	5°	8°	10°
250	75	90			
300	65	75	95		
400	50	55	70	80	90
500	40	45	55	65	70

Maximum roof run for roof slopes and rainfall intensities shown.



HIGH WIND LOAD INSTALLATION DETAILING (HIGH WIND ZONES AND COASTAL WIND BELTS)

The installation process for using the High Wind Load System (HWLS) is a pierced fix method. The High Wind Load System is recommended for terrain categories A & B, (For pdf reference on terrain categories, a document may be found at www.safintra.co.za). Note that the HWLS is not a concealed fix system, and is therefore recommended only for the perimeter and/or overhang areas of the building. Buildings taller than 10m would also require special design attention and the use of the HWLS.

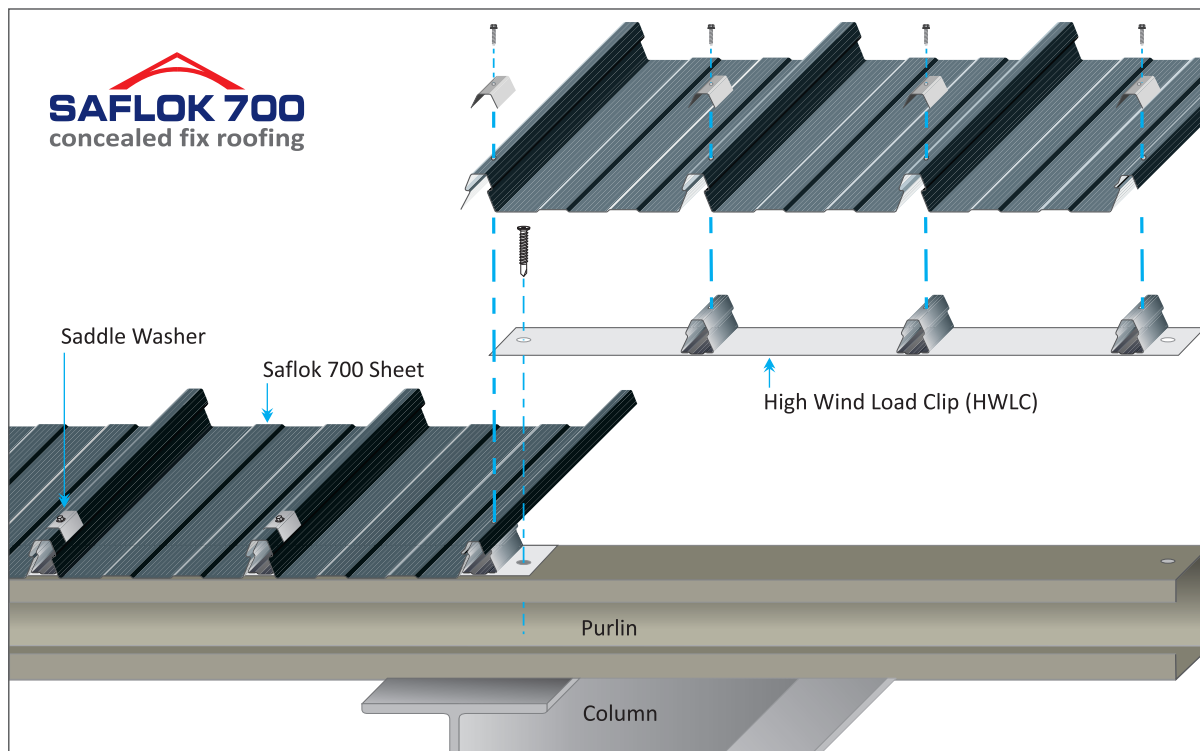


Step 1. Starting with the female rib first, align first sheet and hold down.

Step 2. Place saddle washers over the first 3 ribs above the purlins (starting from the female rib side). Align, and fasten the saddle washers through the rib using an appropriate Fixtite® or Safintra approved fastener.

Step 3. Position the next sheet, engaging the female rib firmly over the male rib of the previous sheet. Repeat step 2.

Note: The bonded washer can only be fixed from the top.

F10 BRACKET FOR FLASHINGS

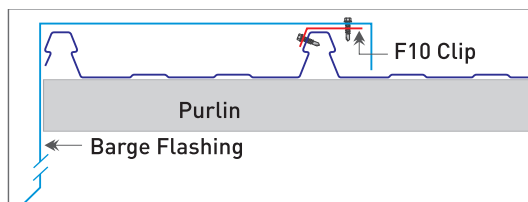

Note: this clip is positively fixed. Care should be taken when detailing industrial-length sheeting and flashing due to thermal expansion.

Safintra recommends the use of a Flashing Slider Clip for very long sheets. Please consult our Technical Department for assistance.

SPECIALISED FIXING ACCESSORIES

POLYSLIDER CLIP

For use with Saflok polycarbonate sheeting. Must be installed with saddle washer.

Polycarbonate sheets must be positively fixed - consult our technical department for advice.



FASTENERS

Where insulation is to be installed, you may need to increase the length of the fasteners given below, depending on the density and thickness of the insulation. When the fastener is properly tightened:

- into metal: there should be at least three threads protruding past the purlin you are fixing to, but the shankguard must not reach that purlin.
- into timber: the fastener must penetrate the timber by the same amount that the recommended fastener would do if there were no insulation.

CRANKING

SAFLOK 700 sheets may be cranked and bullnosed but not reverse bullnosed. Minimum radius is 450mm. On-site cranking is available on request.

CURVING

Natural springing occurs at 36m radius in the convex and 60m radius in the concave. It is important to reduce purlin spacings by 20% when springing a roof.

ROLLING STRAIGHT ONTO A ROOF

It is possible to rollform straight onto a roof using a scaffold ramp. The limitations are the building height and space needed to roll. A departure angle of 10° is the maximum allowed at any time. A greater angle would damage the sheet when leaving the mill and again when bending to settle onto the roof. The sheeting cannot be roll formed onto a building higher than 10m.

SEALED JOINTS

For sealed joints use fasteners or rivets and neutral-cure silicone sealant branded as suitable for use with AZ steel.



Disclaimer:

- Care has been taken to ensure that the information provided is accurate. SAFINTRA does not assume responsibility for inaccuracies or misinterpretations of this data.
- SAFINTRA is continuously engaged in product development, please ensure that you have the most recent issue of information from SAFINTRA.
- Photographs and illustrations are typical examples of roofing and cladding products and applications.

PRODUCT DESCRIPTION & FEATURES

Concealed-fixing, also referred to as secret fix, is designed for very low pitched roofs. Because clips under the sheet hold it down, the sheet is not punctured with fasteners, and remains completely watertight even at a very low slope. The securing clips are pre-fixed into the purlins and the sheet is mechanically snapped onto the clip. As a concealed fix sheet can also expand and contract over the clips as the temperature changes, this system is ideal for long spans on industrial, commercial and retail buildings.

SAFLOK 410 is a concealed fix sheet profile with an effective cover width of 410mm. It is an angular interlocking standing seam trapezoidal rib profile, and is usually roll formed on mobile mills on the building site.

CLIPPING SYSTEM

The SAFLOK 410 clip incorporates a dual action component to positively hold down the male-female joint on every second rib, and an anchor to clasp the inner rib. Every rib is therefore secured, making it fully interlocking.

MATERIAL OPTIONS

Aluminium - Zinc	Gauge (mm)
AZ100/150/200 G550	0.50 0.55
Unpainted or pre-painted	
Aluminium	Gauge (mm)
Aluminium Mill Finish	0.80
Aluminium G4 Colortech	0.80

Also available in 0.8mm Rheinzink material.

Other gauges are available on special request.

Please contact our technical division for additional information or technical data.

SAMPLE SPECIFICATION

Safintra 0,50mm thick SAFLOK 410 Colorplus® AZ150 interlocking roof sheeting fixed to steel internal purlins at 1800mm, and ridge/eaves purlins at 1600mm centres using SAFLOK 410 clips which must be screw fixed to steel purlins with Fixtite® or Safintra approved wafer head self-tapping screws, all in accordance with manufacturer's recommendations.

The sheeting will be a double interlocking concealed fix SAFLOK 410 as manufactured by Safintra Roofing, roll-formed in continuous lengths from Aluminium or Aluminium-Zinc coated steel.

The profile shall be roll-formed with 3 ribs at centres not exceeding 205mm and a cover width not exceeding 410mm.

We do not recommend using Saflok on a roof pitch exceeding 5 degrees due to the possibility of oil canning.




The male rib is to include spurs to ensure a double interlocking action with adjacent sheets. The minimum sheet depth shall be 41mm. Two stiffening ribs are incorporated in each pan.


LENGTHS

With the aid of mobile rolling mills, custom lengths can be rolled on-site. To date the longest continuous sheets in South Africa have been in the region of 130m long. Off-site rolled sheets are cut to transportable lengths (approximately 12m).

ROOF PITCH

SAFLOK 410 was designed for roof pitches from as low as 2° (1 in 50) however 3° is preferred. It can also be used on walls. When applying to very steep roof pitches you should pierce-fix through each sheet under the flashing or capping, along the top of the sheet to prevent the concealed-fixed sheeting from sliding downward in the fixing clips. Clip-in marks might be visible on high pitched roofs. This visual effect might not be aesthetically pleasing in a residential application.

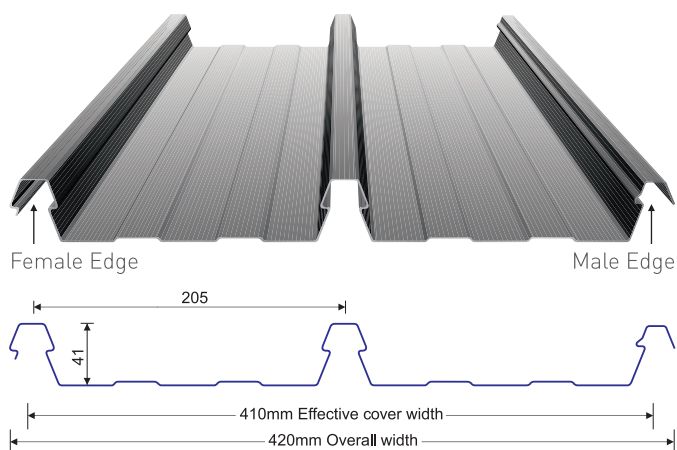

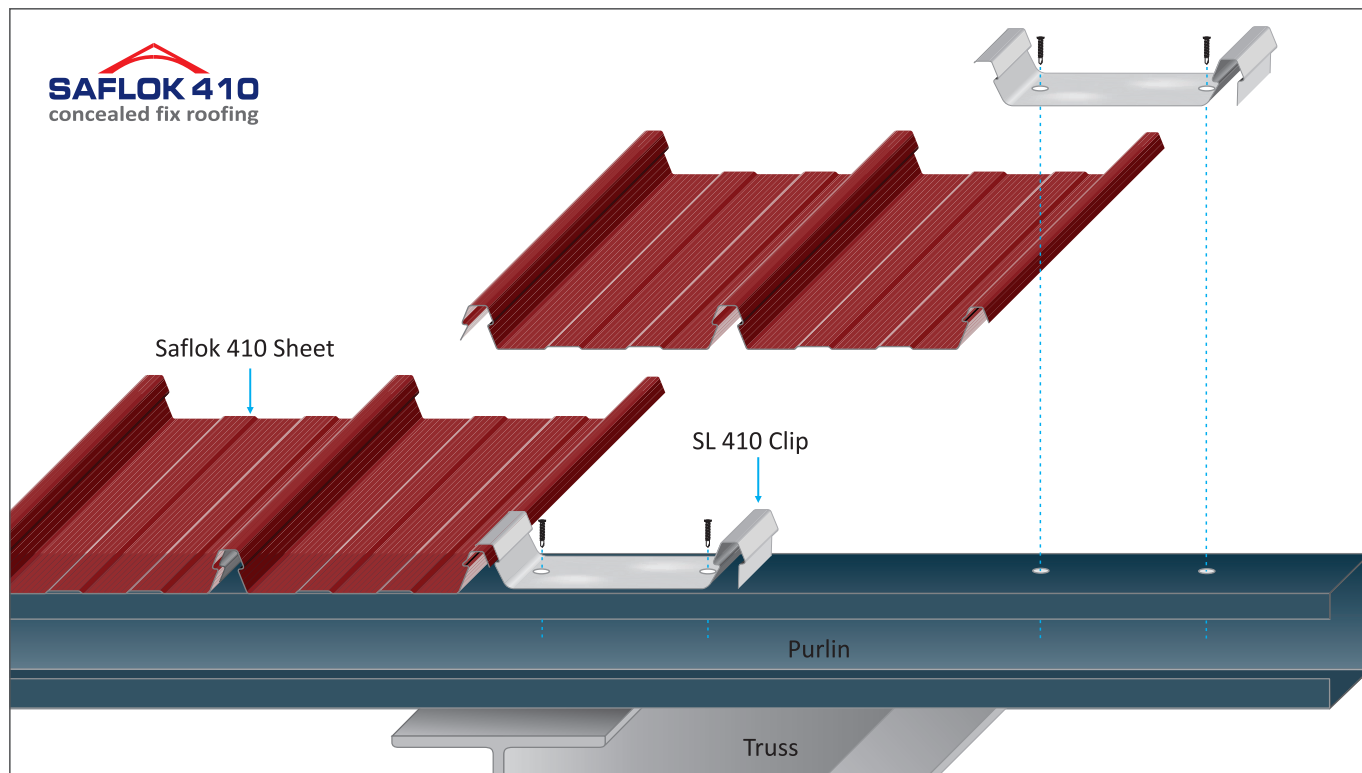

INSTALLATION

Saflok 410 is fastened to the purlin by means of a Saflok 410 clip. Sheets are mechanically locked onto the clips and are not perforated at all. It is essential that the male rib is directly engaged to the underside of the clip.

NEVER re-use a Saflok 410 clip.

Clips for Aluminium Material:

- An Aluminium clip is a necessity when using Aluminium Material.
- When using Saflok Aluminium material on galvanized steel purlins it is recommended to make use of an isolation tape to prevent the bridging of the two dissimilar materials. The recommended tape is Denso or similar. Should the two metals have direct contact it will ultimately result in the manifestation of galvanic corrosion, and the service life of the Aluminium will be compromised.

MATERIAL COMPATIBILITY

Lead, copper, free carbon and bare steel are not compatible with Aluminium - Zinc coated steel or Aluminium material. Don't allow any contact with those materials, nor discharge of rainwater from them onto the material. Supporting members should be coated to avoid problems with underside condensation. If there are doubts about the compatibility of other products being used, consult the technical staff at your nearest Safintra branch.

SEVERE CORROSIVE CONDITIONS

If this product is to be used in marine, severe industrial, or unusually corrosive environments, consult the technical staff at your nearest Safintra branch for guidance.

MAINTENANCE

Optimum product life will be achieved if all external surfaces are washed regularly. Areas not cleaned by natural rainfall (such as the tops of walls sheltered by eaves) should be washed down every six months. Regular maintenance and inspections, especially after severe storms, are essential.

STORAGE AND HANDLING

Keep the product dry and clear of the ground. If stacked or bundled product becomes wet, separate it, wipe it with a clean cloth to dry thoroughly. Handle materials carefully to avoid damage, don't drag materials over rough surfaces or each other, don't drag tools over material and protect from swarf.

Note:

During installation, clean the roof daily by removing all swarf, pop rivets and unused fasteners or any other debris.

PURLIN SPACINGS

Note:

It is important to reduce purlin spacings by 20% when spring curving a roof.

GAUGE	0.5mm	0.55mm	0.8mm
MATERIAL	ALUMINIUM-ZINC	ALUMINIUM-ZINC	ALUMINIUM
ROOFS	mm	mm	mm
Single Span	1 400	1 700	1 000
End Span	1 600	1 900	900
Internal/Double Span	1 800	2 100	1 200
Cantilever (Unstiffened)	150	150	100
Cantilever (Stiffened)	300	300	200
SIDE CLADDING			
Single Span	1 800	2 100	1 500
End Span	1 900	2 200	2 100
Internal Span	2 100	2 500	2 300
Cantilever	300	400	200
Approximate Mass/m ²	5.4kg	6.2kg	2.9kg

Saflok 410 clips are calculated at 140g per clip - require approximately 2 clips per m².

Also available in 0.8mm Rheinzink material.

Other gauges are available on special request.

Please contact our technical division for additional information or technical data.

DRAINAGE TABLE	ROOF SLOPE				
RAINFALL INTENSITY MM/HOUR	2°	3°	5°	8°	10°
250	75	90			
300	65	75	95		
400	50	55	70	80	90
500	40	45	55	65	70
Maximum roof run for roof slopes and rainfall intensities shown.					

Span tables are for SAFLOK 410 with light foot traffic only.

Span tables are based on 1.5kN downward point load, 1.6kPa upward pressure and 0.75kPa for the side cladding, inward or outward. The span tables are maximum recommended spans based on buildings up to 10m high in Region B, Terrain Category B. For further clarity on terrain categories, and wind speeds, please refer to the Safintra Design and Installation Manual (specifically pages 5,6 and 10,11)


ROOFS:

C_{pi}=+0.20, C_{pe}=-0.90, K_l=2.0 for single and end spans, K_l=1.5 for internal spans

WALLS:

C_{pi}=0.20, C_{pe}=-0.65, K_l=2.0 for single and end spans, K_l=1.5 for internal spans. These spacings may vary by serviceability and strength limit stated for particular projects.

SAFLOK 410 CLIP

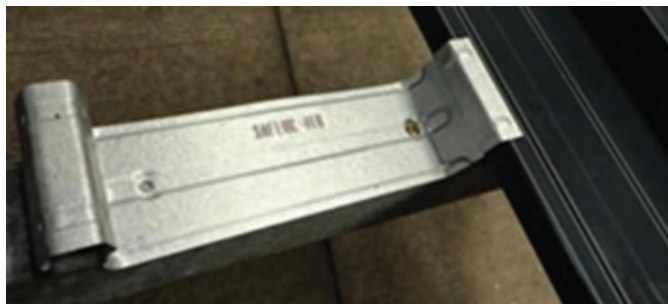

FASTENERS

Where insulation is to be installed, you may need to increase the length of the fasteners given below, depending on the density and thickness of the insulation. When the fastener is properly tightened:

- into metal: there should be at least three threads protruding past the purlin you are fixing to, but the shankguard must not reach that purlin.
- into timber: the fastener must penetrate the timber by the same amount that the recommended fastener would do if there were no insulation.

CURVING

Natural springing occurs at 36m radius in the convex and 60m radius in the concave. It is important to reduce purlin spacings by 20% when spring curving a roof.

SEALED JOINTS

For sealed joints use fasteners or rivets and neutral-cure silicone sealant branded as suitable for use with AZ steel.

ROLLING STRAIGHT ONTO A ROOF

It is possible to roll-form straight onto a roof using a scaffold ramp. The limitations are the building height and space needed to roll. A departure angle of 10° is the maximum allowed at any time. A greater angle will damage the sheet as it leaves the mill, and again when bending to settle onto the roof. The sheeting cannot be roll formed onto a building higher than 10m.



Disclaimer:

- Care has been taken to ensure that the information provided is accurate. SAFINTRA does not assume responsibility for inaccuracies or misinterpretations of this data.
- SAFINTRA is continuously engaged in product development, please ensure that you have the most recent issue of information from SAFINTRA.
- Photographs and illustrations are typical examples of roofing and cladding products and applications.

CONCEALED FIX ROOFING INTRODUCTION

Concealed fix roofing (also referred to as secret fix), is designed for very low pitched roofs. Because clips under the sheet hold it down, the sheet is not punctured with fasteners, and remains completely watertight even at a very low slope. The securing clips are fixed over the male rib of the previous sheet and fastened to the purlins, and the female rib of the next sheet is mechanically snapped over the clip.


As a concealed fix sheet can also expand and contract with the clips as the temperature changes, this system is ideal for long spans on industrial and commercial buildings.

CLIPPING SYSTEM



The NEWLOK clip incorporates a two-part component to positively hold down the male-female joint on every rib. It also incorporates a sliding halter to allow for thermal movement.

*Seaming is recommended for Industrial and Commercial applications. For residential purposes, a snapped configuration is adequate due to reduced loadings.

Two-part NEWLOK Clip

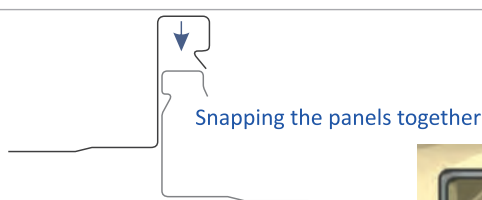

Snapped System

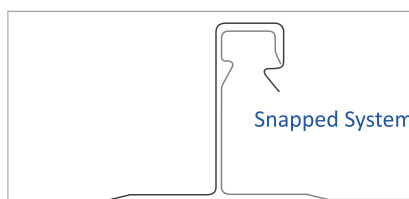


Seamed system



NEWLOK PRODUCT DESCRIPTION

NEWLOK is a concealed fix, standing seam sheet profile with an effective cover width of 445mm, and a height of 50.8mm. It is designed for use on low pitched roofs and can withstand high wind conditions and has commercial, industrial and residential applications.

NEWLOK'S unique interlocking clipping system incorporates a concealed clip to positively hold down the male-female joint at every rib. The profile is usually roll formed on mobile mills on the building site, in lengths of up to 120m. The two-part clip allows for natural thermal expansion and contraction of the sheet, and the 50mm rib height delivers optimal water shedding capabilities at slopes as low as 1.5 degrees.

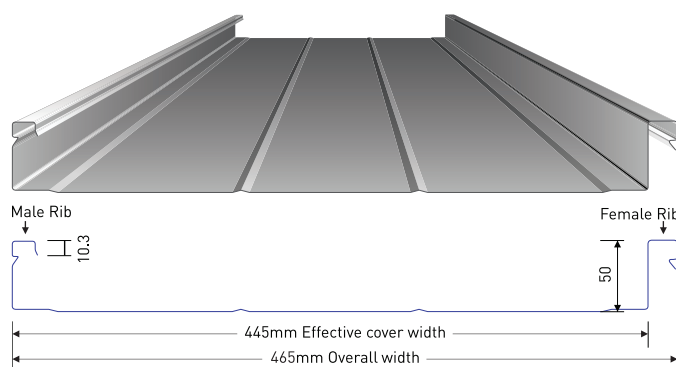


NEWLOK FEATURES AND BENEFITS

- Unique profile offers either a snap-together or a snap-and-seam interlocking mechanism for optimum wind stability
- Exceptional hold down strength, in excess of 3kPa hold down on negative wind uplift on the seamed profile.
- Interlocking system allows natural thermal expansion and contraction, without unclipping between purlin supports
- Concealed fasteners provide increased security, as roof sheets cannot easily be removed from the outside
- Wide purlin supports for economical design

MATERIAL OPTIONS

Aluminium - Zinc	Gauge (mm)
AZ100/150/200 G550	0.50 0.55
Unpainted or pre-painted	
Aluminium	Gauge (mm)
Aluminium	0.80
Unpainted or pre-painted	

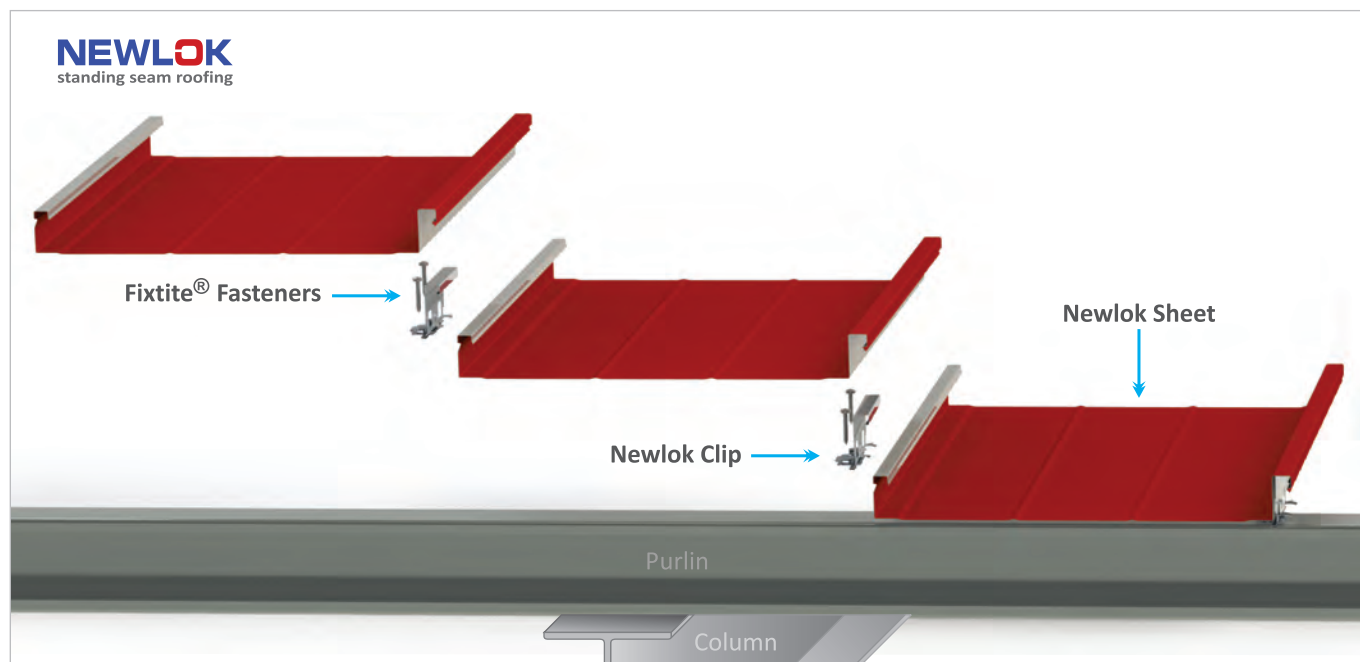

PURLIN SPACINGS

Purlin Spacing is dependant on both downward loading and negative suction loading caused by wind. Your engineer should be consulted to calculate your load (kN/m²) for your particular application.

Span tables are for NEWLOK with light foot traffic only. Span Tables are based on 1.5kN downward pressure, 1.6kPa upward pressure and 0.75kPa for the side cladding, inward or outward.

The span tables are for a maximum of recommended spans based on buildings up to 10m high in medium wind zone, Terrain Category B.

ROOFS:
Cpi=+0.20, Cpe=-0.90, Kl=2.0 for single and end spans, Kl=1.5 for internal Spans.

WALLS:
Cpi=-0.20, Cpe=-0.65, Kl=2.0 for single and end spans, Kl=1.5 for internal Spans. These spacings may vary by serviceability and strength limit stated for particular projects.

	WIND LOADING		POINT LOAD		GAUGE		
	*ASTE 1592-01				0.5mm	0.55mm	0.8mm
MATERIAL	0.55mm Negative wind pressure (Unfactored)	0.55mm Negative wind pressure [‡]	0.55mm Live point load (Unfactored)	0.55mm Live point load [‡]	ALUMINIUM-ZINC	ALUMINIUM-ZINC	ALUMINIUM
ROOFS	kPa	kPa		kN	mm	mm	mm
End Span	3.597	2.767		1.5	1 300	1 600	900
Internal/Double Span	3.284	2.526		1.5	1 500	1 800	1 400
Cantilever (Unstiffened)	-	-		-	150	150	100
Cantilever (Stiffened)	-	-		-	300	300	200
SIDE CLADDING							
Single Span	3.027	2.329		-	1 700	2 000	1 400
End Span	2.916	2.243		-	1 800	2 100	1 600
Internal Span	2.548	1.960		-	2 100	2 500	1 900
Cantilever	-	-		-	300	300	300
Approximate Mass/m ²	-	-		-	5.4kg	6.2kg	2.9kg

NEWLOK clips are calculated at 110g per clip - require approximately 3 clips per m².

*Factored ultimate loading (SANS 10237 - reduction factor of 1.3)

Note:

It is important to reduce purlin spacings by 20% when spring curving a roof.

SAMPLE SPECIFICATION

Safintra NEWLOK, roll-formed in 0.50mm Colorplus® AZ150, and snap-locked or snap locked and seamed roof sheeting, fixed to steel internal purlins at 1500mm, and steel ridge/eaves purlins at 1300mm centres using NEWLOK clips which must be screw fixed to purlins with Fixtite® or Safintra approved wafer head self-tapping screws, all in accordance with manufacturer's recommendations.

The roof sheeting shall be manufactured by Safintra Roofing, roll-formed in continuous lengths and cut to length from Aluminium or Aluminium-Zinc coated steel.

The profile shall be roll formed with 2 ribs of 50.8mm and a cover width of 445mm. Two stiffening ribs shall be incorporated in the pan.

LENGTH

With the aid of a mobile rolling mill, custom lengths can be rolled on-site. To date the longest continuous sheets in South Africa have been in the region of 130m long. Off-site rolled sheets are cut to transportable lengths (approximately 12m).



NEWLOK Mobile Mill



Mechanical Seamer



90° Hand Crimper

AVAILABLE TESTING	DESCRIPTION	RESULT
ASTM E-1592	1 Foot and 5 Foot Wind Test	The max. sustained test pressure was -3.735kPa for 1 foot & -12.942kPa for 5 foot.
ASTM E-1680	Air Leakage Test	Air Infiltration @ 7.665kPa has leakage of 2.631 x 10 ⁻⁶ m ³ /min per m ² & 0.017m ³ /min per m. Air Infiltration @ 30.466kPa has leakage of 5.261 x 10 ⁻⁶ m ³ /min per m ² & 0.026 x 10 ⁻³ m ³ /min per m.
ASTM E-1646	Water Penetration Test	Water penetration @ 30.466kPa has no water leakage.
FM 4471	Foot Traffic Test (Pending)	Results Pending.

NEWLOK ROOFING WITH S-5 CLAMPS


Top quality clamps, such as the S-5 range, may be attached to the ribs without penetrating the roof sheet, thus preserving metal material warranties as well as installation warranties on water-tightness.

The S-5 H90 Mini clamp (pictured) is ideal for the NEWLOK profile, particularly for light weight attachments such as solar arrays, satellite dishes, walkways and mechanical equipment.



S-5 H90 Mini clamp affixed to a trapezoidal standing seam profile.

S-5-H90 Mini

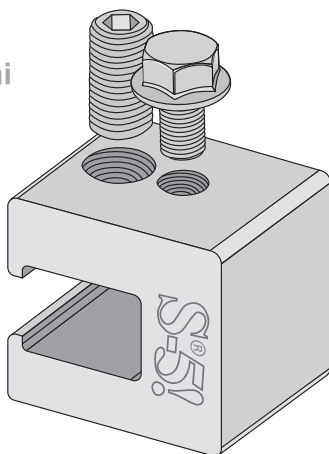

RAIL ATTACHMENT OF SOLAR PV PANELS

In some cases, rails may be required to maximise space, but at a premium cost of substructure. Even in this instance, the rails can be attached using S-5, with zero penetration of the roof sheet.



DIRECT ATTACHMENT

Direct attachment maximises economy, removing the need for expensive railing. The S-5 PV attachment unit has a Mid-Fix option (pictured above) and End-Fix option to accommodate any solar array design.

Disclaimers:

- Test results available on S-5 website
- S-5 H90 mini clamps are suitable for seamed profiles only
- S-5 H-Clamp available ex USA for unseamed NEWLOK

Disclaimer:

- Care has been taken to ensure that the information provided is accurate. SAFINTRA does not assume responsibility for inaccuracies or misinterpretations of this data.
- SAFINTRA is continuously engaged in product development, please ensure that you have the most recent issue of information from SAFINTRA.
- Photographs and illustrations are typical examples of roofing and cladding products and applications.

Flashings and closures are made for particular applications and locations on the roof, with variations to suit the specific profile being used.


Industrial and commercial flashings tend to be functional more than aesthetic, and Safintra makes a range of standard flashings which are suitable for this purpose.





Residential flashings however, usually have an important aesthetic role which necessitates that they are designed for the structure in question.










Safintra is able to produce most custom designed flashings for residential and other applications- please ask your local branch for more information.

Flashings are usually made in the same material as the roof, for colour matching. Safintra flashings are offered in Aluminium-Zinc coated steel and Aluminium.

Please speak to our flashings departments for further guidance and technical assistance.

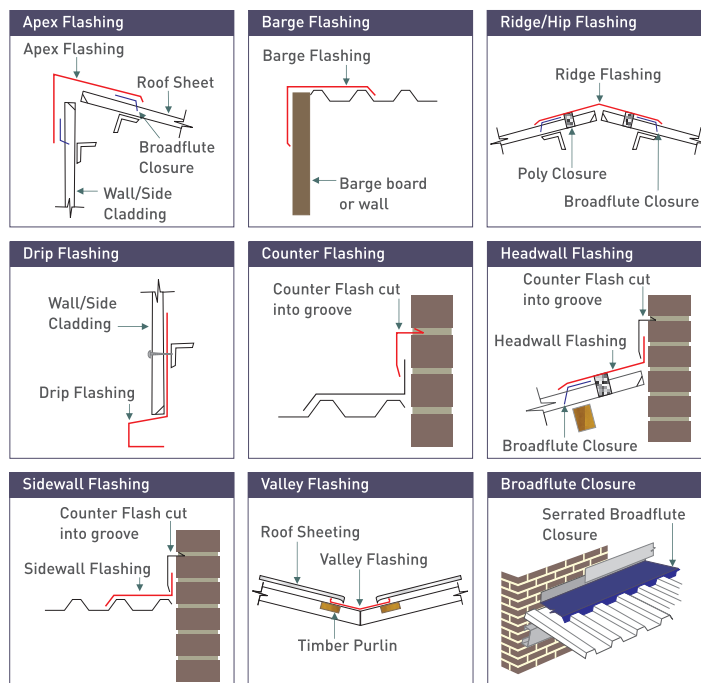

CONCEALED FIX		SAFLOK 700 concealed fix roofing	SAFLOK 410 concealed fix roofing	NEWLOK standing seam roofing
Apex Flashing 	Dimensions (A x B)	330 x 330	330 x 330	330 x 330
	Angle	As required		
	Girth	660	660	660
Barge Flashing 	Dimensions (A x B)	330 x 330	330 x 240	330 x 330 x 48
	Angle	90°	90°	90°
	Girth	660	570	708
Ridge Flashing 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231
	Angle	140°	140°	140°
	Girth	462	462	462
Comments		Use with broad flute closure.		
Hip Cap 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231
	Angle	128°	128°	128°
	Girth	462	462	462
Comments		Use with broad flute closure.		

CONCEALED FIX		SAFLOK 700 concealed fix roofing	SAFLOK 410 concealed fix roofing	NEWLOK standing seam roofing
Drip Flashing 	Dimensions (A x B x C x D)	111 x 60 x 25 x 35	111 x 60 x 25 x 35	111 x 60 x 25 x 35
	Angle	92°	92°	92°
	Girth	231	231	231
Counter Flashing 	Dimensions (A x B)	13 x 30 x 142	13 x 30 x 142	13 x 30 x 142
	Angle	88°	88°	88°
	Girth	185	185	185
Headwall Flashing 	Dimensions (A x B)	154 x 308	154 x 308	154 x 308
	Angle	As required		
	Girth	462	462	462
Side Wall Flashing 	Dimensions (A x B)	154 x 270 x 38	154 x 240 x 38	154 x 270 x 48
	Angle	90°	90°	90°
	Girth	462	432	470
External Corner 	Dimensions (A x B)	330 x 330 x 38 x 38	330 x 330 x 38 x 38	330 x 330 x 48 x 48
	Angle	90°	90°	90°
	Girth	736	736	756
Internal Corner 	Dimensions (A x B)	330 x 330 x 38 x 38	330 x 330 x 38 x 38	330 x 330 x 38 x 38
	Angle	90°	90°	90°
	Girth	736	736	736
Valley Flashing 	Dimensions (A x B)	231 x 231	231 x 231	231 x 231
	Angle	140°	140°	140°
	Girth	462	462	462
Under-Over Flashing 	Dimensions (A x B)	150 x 287	150 x 287	150 x 287
	Angle	128°	128°	128°
	Girth	437	437	437
Broadflute Closure 	Length Of Closure	700	410	445
	Comments	Need one closure per roof sheet.		

All dimensions given in millimetres.

Diagrams are for illustrative purposes only.

Note: 0.8mm Z-support flashings is recommended for use with Newlok.

SAFLOK 700 concealed fix roofing

LOCKS DOWN YOUR ROOF



The most advanced wide-coverage concealed fix system on the market

- Cover width of 700mm per sheet for fast, cost effective installation
- Re-engineered clips ensure superb sheet engagement at every rib, and total stability at the male-female lap
- Deep pans for excellent water run off, even at 2 degree pitch
- Saflok components include detailing for high wind loads and structurally challenging installations
- Can be rolled on-site in lengths up to 120 metres

South African operations:- Johannesburg, Cape Town, Durban, Port Elizabeth, Polokwane, Nelspruit & Bloemfontein. www.safintra.co.za

Additional operations in Africa include:- Namibia, Botswana, Mozambique, Malawi, Zambia, Angola, Tanzania & Kenya, amongst others. www.safintra.com

A member of the



PIERCED FIX ROOFING SYSTEMS

classi**corr**
~~~~~ corrugated

**TUFDEK** **IBR**

**WIDEDEK**

**FLUTELINE**

**Trimflute**

## PIERCED FIX FLASHINGS AND CLOSURES

**VERSATILE**

## PRODUCT DESCRIPTION & FEATURES



The Corrugated profile is sinusoidal and can be used as roofing and cladding material. With its origins dating back to the Victorian era, it is probably the most commonly known sheeting profile used in the world today. The fact that the corrugated profiled sheeting has been around since before the turn of the century proves that this easy to use and effective profile for roofing and wall cladding is here to stay.

- Corrugated sheets can be factory cranked, curved and bullnosed to a wide range of radii. For further details contact our Technical Department.

## SAMPLE SPECIFICATION

Safintra 0,5mm thick, AZ150 ZincAl® Corrugated Profile Roof Sheetting, fixed to intermediate timber purlins at 1100mm centres and to ridge and eaves purlins at 900mm centres, with 12 x 45mm Fixtite® or Safintra approved Hex Head self-drilling screws. Sheets to be fixed with three fasteners per sheet per purlin. All in accordance with the manufacturers recommendations.

The sheeting will be the Corrugated Profile as manufactured by Safintra Roofing. The rib height shall be 17,5mm and shall be fixed in accordance with the manufacturer's recommendations.

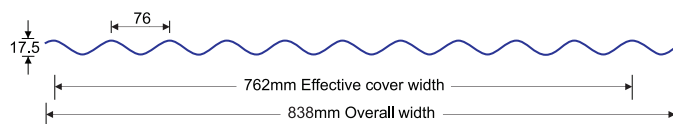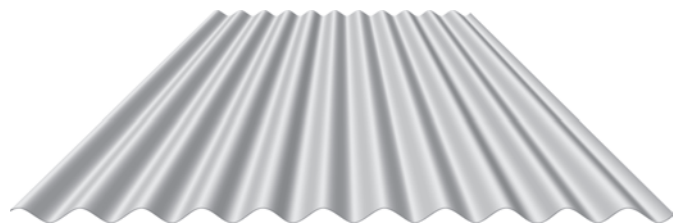

## MATERIAL OPTIONS

| Aluminium - Zinc         | Gauge (mm) |
|--------------------------|------------|
| AZ150/G550               | 0.50 0.55  |
| Unpainted or pre-painted |            |
| Aluminium                | Gauge (mm) |
| Aluminium Mill Finish    | 0.80       |
| Aluminium G4 Colortech   | 0.80       |
| Rheinzink                | Gauge (mm) |
|                          | 0.80       |


Other gauges are available on special request.

### Note:

During installation, clean the roof daily by removing all swarf, pop rivets and unused fasteners or any other debris.

## PURLIN SPACINGS

Purlin Spacings are dependant on both downward loading and negative suction loading caused by wind. Your engineer should be consulted to calculate your load (kN/m<sup>2</sup>) for your particular application.

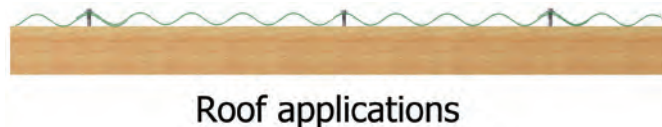

## PURLIN SPACINGS

| GAUGE                           | 0.5mm          | 0.55mm         | 0.8mm     |
|---------------------------------|----------------|----------------|-----------|
| MATERIAL                        | ALUMINIUM-ZINC | ALUMINIUM-ZINC | ALUMINIUM |
| <b>ROOFS</b>                    | <b>mm</b>      | <b>mm</b>      | <b>mm</b> |
| Single Span                     | 600            | 700            | 800       |
| End Span                        | 900            | 1 200          | 850       |
| Internal/Double Span            | 1 100          | 1 700          | 1 000     |
| Cantilever (Unstiffened)        | 200            | 250            | 200       |
| Cantilever (Stiffened)          | 300            | 350            | 250       |
| <b>SIDE CLADDING</b>            |                |                |           |
| Single Span                     | 1 200          | 1 500          | 1 200     |
| End Span                        | 1 350          | 1 800          | 1 300     |
| Internal Span                   | 1 800          | 2 400          | 1 500     |
| Cantilever                      | 200            | 250            | 300       |
| Approximate Mass/m <sup>2</sup> | 3.45kg         | 4.19kg         | 2.9kg     |

Also available in 0.8mm Rheinzink material.

Other gauges are available on special request.

Please contact our technical division for additional information or technical data.



## LENGTHS & ROOF PITCH

When using Corrugated sheeting the recommended minimum roof slope (pitch) for sheets longer than 15m is 15°, and for sheets shorter than 15m the minimum roof slope is 10°.

## TOLERANCES

A length variation range of +/-5,0mm, and width tolerance of +/-3,0mm are permissible

## PRODUCT DESCRIPTION & FEATURES



IBR is an abbreviation for Inverted Box Rib, an angular trapezoidal fluted profile sheet with a bold appearance which makes it both attractive and practical. Since IBR was introduced to the South African market in 1958, it has become the most popular sheeting used in construction of commercial and industrial buildings.

- The general shape and appearance of the trapezoidal flutes ensure that IBR is totally acceptable for use as roof and wallcladding. The deep and broad flutes of the IBR type sheeting ensures excellent drainage characteristics.
- IBR is designed to provide the most advantageous load/span characteristics consistent with economy.
- IBR offers the end user the option of having stiffening ribs in the sheet which help to remove oil canning from the broad flute.
- IBR can be factory cranked, curved and bullnosed to a wide range of radii. For further details contact our Technical Department.

## SAMPLE SPECIFICATION

Safintra 0,47mm thick, AZ 150 ZincAl® IBR profile roof sheeting, fixed to intermediate steel purlins at 1900mm centres and to ridge and eaves purlins at 1650 centres, with 12 x 65mm long Fixtite® or Safintra approved Hex Head self-drilling screws at every second crest, at intermediate purlins and at every crest at eaves purlins side laps to be stitched at 500mm centres between purlins all in accordance with manufacturers recommendations.

The sheeting shall be IBR type profile as manufactured by Safintra Roofing. The profile shall be roll-formed with 5 trapezoidal ribs at 171,5mm, centres with a nett cover of 686mm. The rib height shall be 36,5mm and shall be fixed in accordance with the manufacturer's recommendations.

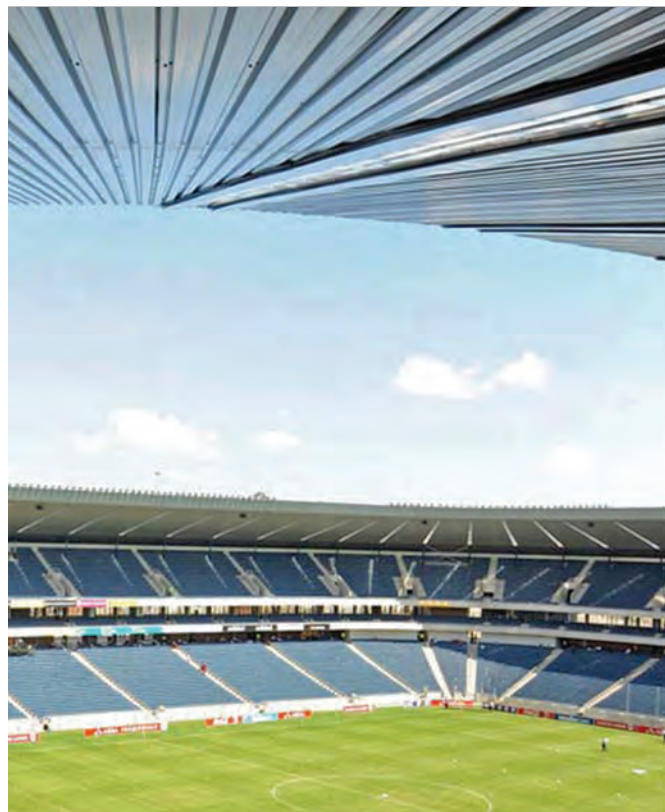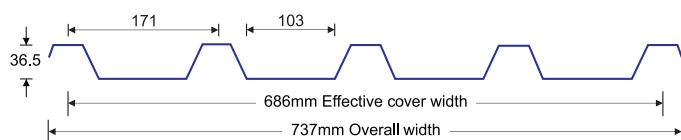

## MATERIAL OPTIONS

| Aluminium - Zinc         | Gauge (mm) |
|--------------------------|------------|
| AZ100/150/200 G550       | 0.50 0.55  |
| Unpainted or pre-painted |            |
| Aluminium                | Gauge (mm) |
| Aluminium Mill Finish    | 0.80       |
| Aluminium G4 Colortech   | 0.80       |

Other gauges are available on special request.

### Note:


During installation, clean the roof daily by removing all swarf, pop rivets and unused fasteners or any other debris.

## PURLIN SPACINGS

Purlin Spacings are dependant on both downward loading and negative suction loading caused by wind. Your engineer should be consulted to calculate your load (kN/m<sup>2</sup>) for your particular application.

## PURLIN SPACINGS

| GAUGE                           | 0.5mm          | 0.55mm         | 0.8mm     |
|---------------------------------|----------------|----------------|-----------|
| MATERIAL                        | ALUMINIUM-ZINC | ALUMINIUM-ZINC | ALUMINIUM |
| ROOFS                           | mm             | mm             | mm        |
| Single Span                     | 1 650          | 1 750          | 1 200     |
| End Span                        | 1 700          | 1 900          | 1 900     |
| Internal/Double Span            | 1 900          | 2 100          | 1 500     |
| Cantilever (Unstiffened)        | 200            | 260            | 20        |
| Cantilever (Stiffened)          | 300            | 350            | 250       |
| SIDE CLADDING                   |                |                |           |
| Single Span                     | 2 100          | 2 300          | 1 600     |
| End Span                        | 2 400          | 2 600          | 2 100     |
| Internal Span                   | 2 600          | 2 700          | 2 100     |
| Cantilever                      | 300            | 400            | 300       |
| Approximate Mass/m <sup>2</sup> | 3.45kg         | 4.19kg         | 2.9kg     |

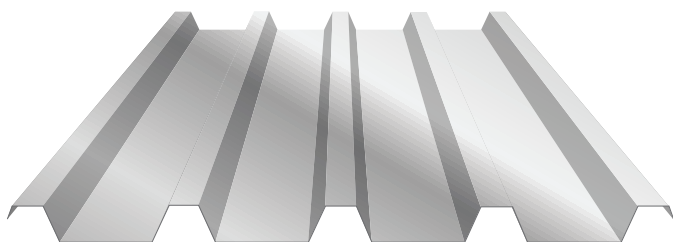

## LENGTHS & ROOF PITCH

When using IBR sheeting the recommended minimum pitch for roof slopes in excess of 15m is 7.5° and for slopes less than 15m is 5°. IBR sheeting can be ordered in any length, subject to transport limitations, up to 13,2m. Longer lengths require special transport arrangements.

## TOLERANCES

A length variation range of +/-5,0mm, and width tolerance of +/-3,0mm are permissible



## PRODUCT DESCRIPTION & FEATURES


Widedek is an angular trapezoidal fluted sheet and is similar in appearance to IBR profiled sheeting, the difference being the cover width of the sheet, and the depth of the flutes. Widedek sheeting has a cover width of 760mm and the depth of the flutes on Widedek is 29mm. The Widedek profile has a bigger cover width than IBR, resulting in a saving on sheeting. Using this type of sheeting has certain cost saving advantages.

- The Widedek profile has a better cover width than IBR, resulting in a saving of  $\pm 10\%$  on sheeting purchased.
- To achieve the same coverage less sheets are required to be erected, thus saving on time and labour.
- The advantage of using Widedek in place of a sinusoidal corrugated profile is its strength. The spanning capacity of Widedek is greater than the corrugated profile thus requiring less purlin also resulting in a further cost saving
- Widedek can be factory cranked, curved and bullnosed to a wide range of radii.

## SAMPLE SPECIFICATION

Safintra 0,5mm thick AZ150 ZincAl® Widedek profile roof sheeting, fixed to intermediate steel purlins at 1600mm centres and to ridge and eaves purlins at 1350mm centres, with 12 x 55mm long Fxite® or Safintra approved Hex Head self-drilling screws at every second crest at intermediate purlins and every crest at eaves purlins all in accordance with the manufacturer's recommendations.

The sheeting shall be Widedek trapezoidal type profile as manufactured by Safintra Roofing. The profile shall be roll-formed with 5 trapezoidal ribs at 191mm centres with a nett cover of 760mm. The rib height shall be 29mm and shall be fixed in accordance with the manufacturer's recommendations.

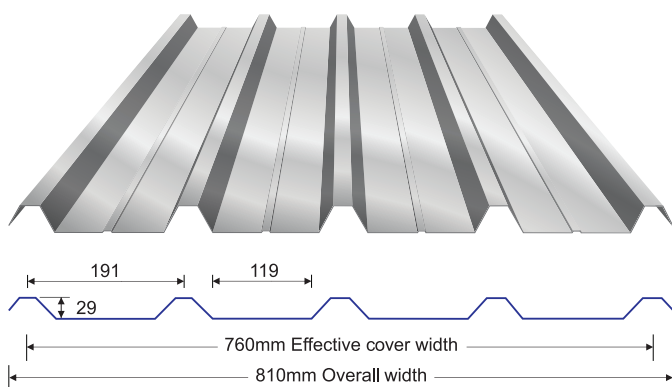

## MATERIAL OPTIONS

| Aluminium - Zinc         | Gauge (mm) |
|--------------------------|------------|
| AZ100/150/200 G550       | 0.50 0.55  |
| Unpainted or pre-painted |            |
| Aluminium                | Gauge (mm) |
| Aluminium Mill Finish    | 0.80       |
| Aluminium G4 Colortech   | 0.80       |

Other gauges are available on special request.

### Note:

During installation, clean the roof daily by removing all swarf, pop rivets and unused fasteners or any other debris.

## PURLIN SPACINGS

Purlin Spacings are dependant on both downward loading and negative suction loading caused by wind. Your engineer should be consulted to calculate your load (kN/m<sup>2</sup>) for your particular application.

## PURLIN SPACINGS

| GAUGE                           | 0.5mm          | 0.55mm         | 0.8mm     |
|---------------------------------|----------------|----------------|-----------|
| MATERIAL                        | ALUMINIUM-ZINC | ALUMINIUM-ZINC | ALUMINIUM |
| <b>ROOFS</b>                    | <b>mm</b>      | <b>mm</b>      | <b>mm</b> |
| Single Span                     | 1 350          | 1 500          | 800       |
| End Span                        | 1 400          | 1 550          | 850       |
| Internal/Double Span            | 1 600          | 1 700          | 1 000     |
| Cantilever (Unstiffened)        | 150            | 180            | 150       |
| Cantilever (Stiffened)          | 300            | 300            | 200       |
| <b>SIDE CLADDING</b>            |                |                |           |
| Single Span                     | 2 000          | 2 300          | 1 200     |
| End Span                        | 2 100          | 2 400          | 1 300     |
| Internal Span                   | 2 400          | 2 600          | 1 500     |
| Cantilever                      | 200            | 300            | 300       |
| Approximate Mass/m <sup>2</sup> | 3.45kg         | 3.89kg         | 2.9kg     |

## LENGTHS & ROOF PITCH

When using Widedek sheeting the recommended minimum pitch for roof slopes in excess of 15m is 10° and for slopes less than 15m is 7.5°. Widedek sheeting can be ordered in any length, subject to transport limitations, up to 13,2m. Longer lengths require special transport arrangements.

## TOLERANCES

A length variation range of +/-5,0mm, and width tolerance of +/-3,0mm are permissible



### Disclaimer:

- Care has been taken to ensure that the information provided is accurate. SAFINTRA does not assume responsibility for inaccuracies or misinterpretations of this data.
- SAFINTRA is continuously engaged in product development, please ensure that you have the most recent issue of information from SAFINTRA.
- Photographs and illustrations are typical examples of roofing and cladding products and applications.

## PRODUCT DESCRIPTION & FEATURES

Industrial Seven is an angular trapezoidal fluted profile sheet with similar characteristics to IBR but having an effective cover of 889mm, which is wider than IBR.

- The general shape and appearance of the trapezoidal flutes ensure that Industrial Seven is totally acceptable for use as roof and wall cladding. The deep and broad flutes of the Industrial Seven type sheeting ensures excellent drainage characteristics, which makes it an ideal sheet for roofing applications.
- Industrial Seven offers optimum strength-to-weight performance and is designed to provide the most advantageous load/span characteristics ensuring best economical usage.
- Industrial Seven can be factory cranked, curved and bullnosed to a wide range of radii. For further details contact our Technical Department.
- On galvanized steel purlins it is recommended to make use of an isolation tape to prevent the bridging of the two dissimilar materials. The recommended tape is a "Denso LDP 300" or similar. Should the two metals have direct contact it will ultimately result in the manifestation of galvanic corrosion. The service life of the Aluminium will be compromised.



## SAMPLE SPECIFICATION

The sheeting shall be Industrial Seven profile as manufactured by Safintra Roofing. The profile shall be roll-formed with 8 trapezoidal ribs at 127mm centres with a nett cover of 889mm. The rib height shall be 38mm and shall be fixed in accordance with the manufacturer's recommendations.


Safintra 0,5mm thick, 889mm cover Industrial Seven Profile ZincAl® AZ150 Roof Sheetting, fixed to steel channel purlins at 2000mm centres and eaves and ridge purlins at 1500mm centres, using 12 x 65mm stainless steel self tapping screws with bonded washer as described at first, third, fourth and sixth crest of each sheet and at all crest and sheet ends. Side laps to be secured using 6 x 20mm stainless steel self tapping screws with bonded washer over purlins and at centres not exceeding 500mm between purlins with minimum 230mm end laps, all in accordance with the manufacturer's recommendations.

### Note 1:

During installation, clean the roof daily by removing all swarf, pop rivets and unused fasteners or any other debris.

### Note 2:

Safintra recommends Fixtite class 4 or Safintra approved class 3 fasteners.

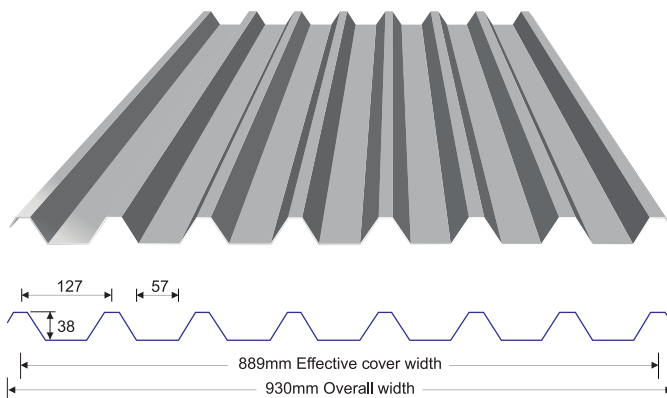

## MATERIAL OPTIONS

| Aluminium - Zinc         | Gauge (mm) |
|--------------------------|------------|
| AZ100/150/200 G550       | 0.50 0.55  |
| Unpainted or pre-painted |            |
| Aluminium                | Gauge (mm) |
| Aluminium Mill Finish    | 0.80       |
| Aluminium G4 Colortech   | 0.80       |

Other gauges are available on special request.

## PURLIN SPACINGS

Purlin Spacings are dependant on both downward loading and negative suction loading caused by wind. Your engineer should be consulted to calculate your load (kN/m<sup>2</sup>) for your particular application.

## PURLIN SPACINGS

| GAUGE                           | 0.5mm          | 0.55mm         | 0.8mm     |
|---------------------------------|----------------|----------------|-----------|
| MATERIAL                        | ALUMINIUM-ZINC | ALUMINIUM-ZINC | ALUMINIUM |
| ROOFS                           | mm             | mm             | mm        |
| Single Span                     | 1 900          | 1 950          | 1 500     |
| End Span                        | 2 000          | 2 100          | 1 550     |
| Internal/Double Span            | 2 450          | 2 650          | 2 100     |
| Cantilever (Unstiffened)        | 400            | 600            | 450       |
| Cantilever (Stiffened)          | 500            | 700            | 550       |
| SIDE CLADDING                   |                |                |           |
| Single Span                     | 3 300          | 3 350          | 2 400     |
| End Span                        | 3 400          | 3 450          | 2 500     |
| Internal Span                   | 3 750          | 3 900          | 3 000     |
| Cantilever                      | 200            | 300            | 450       |
| Approximate Mass/m <sup>2</sup> | 4.6kg          | 4.64kg         | 5.52kg    |



## LENGTHS & ROOF PITCH

When using Industrial 7 sheeting the recommended minimum pitch for roof slopes in excess of 15m is 7.5° and for slopes less than 15m is 5°. Industrial 7 sheeting can be ordered in any length, subject to transport limitations, up to 13,2m. Longer lengths require special transport arrangements.

## TOLERANCES

A length variation range of +/-5,0mm, and width tolerance of +/-3,0mm are permissible

### Disclaimer:

- Care has been taken to ensure that the information provided is accurate. SAFINTRA does not assume responsibility for inaccuracies or misinterpretations of this data.
- SAFINTRA is continuously engaged in product development, please ensure that you have the most recent issue of information from SAFINTRA.
- Photographs and illustrations are typical examples of roofing and cladding products and applications.



## PRODUCT DESCRIPTION & FEATURES

Trimflute is a subtle square fluted profile. The long flute gives the profile its strength with long spanning capabilities. Trimflute can be used as a roofing as well as a cladding profile.

- The square flutes of Trimflute type sheeting ensure excellent drainage characteristics.
- The contemporary appearance of Trimflute is aesthetically appealing.
- Trimflute can be factory cranked, curved and bullnosed to a wide range of radii. For further details contact our Technical Department.

## SAMPLE SPECIFICATION

The sheeting shall be Trimflute type profile as manufactured by Safintra Roofing. The profile shall be roll-formed with 6 trapezoidal ribs at 203 mm, centers with a net cover of 1015 mm. The rib height shall be 26.5 mm and shall be fixed in accordance with the manufacturer's recommendations.

Safintra 0.50 mm thick, ZincAl® AZ 150 Trimflute Profile Roof Sheeting, fixed to internal steel purlins at 1600 mm centers and to ridge and eaves purlins at 1400 centers, with Fixtite® or Safintra approved 12 x 65mm long Hex Head self-drilling screws at every second crest, internal purlins and every crest. Eaves purlins side laps to be stitched at 500 mm centers between purlins all in accordance with manufacturers recommendations.

## FASTENING

Trimflute is pierce-fixed to timber or steel supports. This means that fastener screws pass through the sheeting. You can place screws for Trimflute through the crests or in the valleys. To maximise water tightness, always place roof screws through the crest. For walling, you may use either crest or valley fixing. Always drive the screws perpendicular to the sheeting, and in the centre of the corrugation or rib. Don't place fasteners less than 25 mm from the ends of sheets.

The edge of Trimflute with the anti-capillary groove is always the under-lap. It is generally considered good practice to use fasteners along side-laps however, when cladding is supported as indicated in purling spacings, side-lap fasteners are not usually needed for strength.


End-laps are not usually necessary because Trimflute is available in long lengths. If you want endlaps, seek advice from your nearest Safintra office on the sequence of laying and the amount of overlap. When Trimflute is laid on slopes of 7.5 degrees or more, cut back the corner of the undersheet, at the downhill end of the sheet to block capillary action.



## MATERIAL OPTIONS

| Aluminium - Zinc         | Gauge (mm) |
|--------------------------|------------|
| AZ100/150/200 G550       | 0.50 0.55  |
| Unpainted or pre-painted |            |
| Aluminium                | Gauge (mm) |
| Aluminium Mill Finish    | 0.80       |
| Aluminium G4 Colortech   | 0.80       |

Other gauges are available on special request.

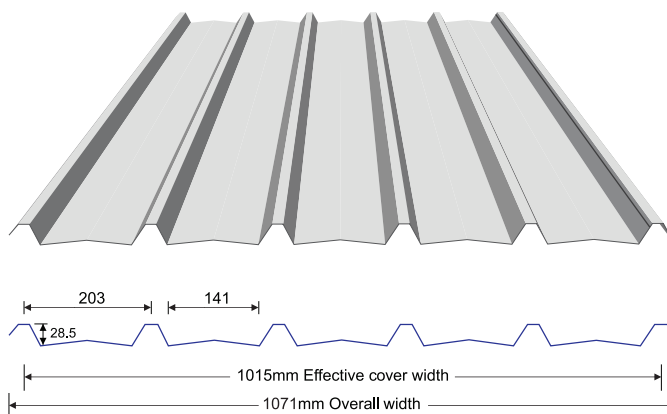



## PURLIN SPACINGS

Purlin Spacings are dependant on both downward loading and negative suction loading caused by wind. Your engineer should be consulted to calculate your load (kN/m<sup>2</sup>) for your particular application.

| GAUGE                           | 0.5mm          | 0.55mm         | 0.8mm     |
|---------------------------------|----------------|----------------|-----------|
| MATERIAL                        | ALUMINIUM-ZINC | ALUMINIUM-ZINC | ALUMINIUM |
| ROOFS                           | mm             | mm             | mm        |
| Single Span                     | 1 350          | 1 500          | 800       |
| End Span                        | 1 400          | 1 550          | 850       |
| Internal/Double Span            | 1 600          | 1 700          | 1 000     |
| Cantilever (Unstiffened)        | 150            | 180            | 150       |
| Cantilever (Stiffened)          | 300            | 300            | 200       |
| SIDE CLADDING                   |                |                |           |
| Single Span                     | 2 000          | 2 300          | 1 200     |
| End Span                        | 2 100          | 2 400          | 1 300     |
| Internal Span                   | 2 400          | 2 600          | 1 500     |
| Cantilever                      | 200            | 300            | 300       |
| Approximate Mass/m <sup>2</sup> | 4.5kg          | 4.93kg         | 3.9kg     |

## LENGTHS & ROOF PITCH


When using Trimflute sheeting the recommended minimum pitch for roof slopes in excess of 15m is 10° and for slopes less than 15m is 7,5°. Trimflute sheeting can be ordered in any length, subject to transport limitations, up to 13,2m. Longer lengths require special transport arrangements.

## TOLERANCES

A length variation range of +/-5,0mm, and width tolerance of +/-3,0mm are permissible

### Note:

During installation, clean the roof daily by removing all swarf, pop rivets and unused fasteners or any other debris.

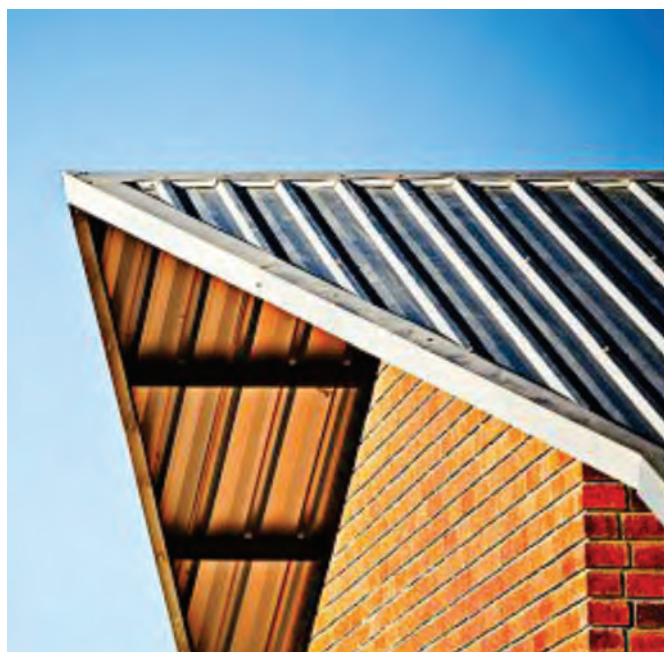

### Disclaimer:

- Care has been taken to ensure that the information provided is accurate. SAFINTRA does not assume responsibility for inaccuracies or misinterpretations of this data.
- SAFINTRA is continuously engaged in product development, please ensure that you have the most recent issue of information from SAFINTRA.
- Photographs and illustrations are typical examples of roofing and cladding products and applications.

Flashings and closures are made for particular applications and locations on the roof, with variations to suit the specific profile being used.


Industrial and commercial flashings tend to be functional more than aesthetic, and Safintra makes a range of standard flashings which are suitable for this purpose.

Residential flashings however, usually have an important aesthetic role which necessitates that they are designed for the structure in question.











Safintra is able to produce most custom designed flashings for residential and other applications- please ask your local branch for more information.

Flashings are usually made in the same material as the roof, for colour matching. Safintra flashings are offered in Aluminium-Zinc coated steel and Aluminium. All counter flashings are sealed with silicone - not cement.

Please speak to our flashings departments for further guidance and technical assistance.

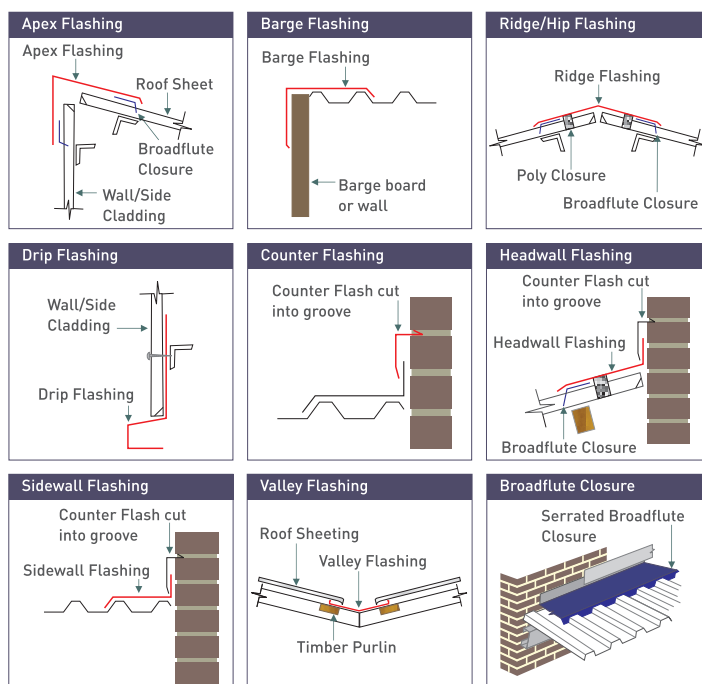

| PIERCED FIX                        |                    | TUFDEK                   | WIDEDEK   | FLUTELINE | Trimflute | classicro corrugated |
|------------------------------------|--------------------|--------------------------|-----------|-----------|-----------|----------------------|
| <b>Apex Flashing</b><br>           | Dimensions (A x B) | 231 x 231                | 231 x 231 | 231 x 231 | 231 x 231 | 231 x 231            |
|                                    | Angle              | As required              |           |           |           |                      |
|                                    | Girth              | 462                      | 462       | 462       | 462       | 462                  |
|                                    | Comments           | Use with fluted closure. |           |           |           |                      |
| <b>Barge Flashing</b><br>          | Dimensions (A x B) | 231 x 231                | 231 x 231 | 231 x 300 | 217 x 245 | 231 x 231            |
|                                    | Angle              | 90°                      | 90°       | 90°       | 90°       | 90°                  |
|                                    | Girth              | 462                      | 462       | 462       | 462       | 462                  |
|                                    | Comments           | Use with fluted closure. |           |           |           |                      |
| <b>Ridge Flashing</b><br>          | Dimensions (A x B) | 231 x 231                | 231 x 231 | 231 x 231 | 231 x 231 | 231 x 231            |
|                                    | Angle              | 140°                     | 140°      | 140°      | 140°      | 140°                 |
|                                    | Girth              | 462                      | 462       | 462       | 462       | 462                  |
|                                    | Comments           | Use with fluted closure. |           |           |           |                      |
| <b>Roll Top Ridge Flashing</b><br> | Dimensions (A x B) | 231 x 231                | 231 x 231 | 231 x 231 | 231 x 231 | 231 x 231            |
|                                    | Angle              | 140°                     | 140°      | 140°      | 140°      | 140°                 |
|                                    | Girth              | 462                      | 462       | 462       | 462       | 462                  |
|                                    | Comments           | Use with fluted closure. |           |           |           |                      |
| <b>Hip Cap</b><br>                 | Dimensions (A x B) | 231 x 231                | 231 x 231 | 231 x 231 | 231 x 231 | 231 x 231            |
|                                    | Angle              | 128°                     | 128°      | 128°      | 128°      | 128°                 |
|                                    | Girth              | 462                      | 462       | 462       | 462       | 462                  |
|                                    | Comments           | Use with fluted closure. |           |           |           |                      |

| PIERCED FIX                                                                                                            |                            | TUFDEK                           | WIDEDEK            | FLUTELINE         | Trimflute          | classi corr corrugated |
|------------------------------------------------------------------------------------------------------------------------|----------------------------|----------------------------------|--------------------|-------------------|--------------------|------------------------|
| <b>Broad Flute Closure</b><br>        | Length of closure          | 686                              | 760                | 889               | N/A                | N/A                    |
|                                                                                                                        | Comments                   | Need one closure per roof sheet. |                    |                   | No closure         |                        |
| <b>Drip Flashing</b><br>              | Dimensions (A x B x C x D) | 60 x 50 x 20 x 24                | 111 x 60 x 25 x 35 | 60 x 50 x 20 x 24 | 111 x 60 x 25 x 35 | 111 x 60 x 25 x 35     |
|                                                                                                                        | Angle                      | 92°                              | 92°                | 92°               | 92°                | 92°                    |
|                                                                                                                        | Girth                      | 154                              | 231                | 154               | 231                | 231                    |
| <b>Counter Flashing</b><br>           | Dimensions (A x B)         | 30 x 112                         | 30 x 112           | 30 x 112          | 30 x 112           | 30 x 112               |
|                                                                                                                        | Angle                      | (i)22.5° (ii)88°                 | (i)22.5° (ii)88°   | (i)22.5° (ii)88°  | (i)22.5° (ii)88°   | (i)22.5° (ii)88°       |
|                                                                                                                        | Girth                      | 154                              | 154                | 154               | 154                | 154                    |
| <b>Headwall Flashing</b><br>         | Dimensions (A x B)         | 75 x 231                         | 75 x 231           | 75 x 231          | 75 x 231           | 75 x 231               |
|                                                                                                                        | Angle                      | As required                      |                    |                   |                    |                        |
|                                                                                                                        | Girth                      | 308                              | 308                | 308               | 308                | 308                    |
| <b>Side Wall Flashing</b><br>       | Dimensions (A x B)         | 77 x 221                         | 77 x 221           | 75 x 300          | 63 x 245           | 77 x 221               |
|                                                                                                                        | Angle                      | 90°                              | 90°                | 90°               | 90°                | 90°                    |
|                                                                                                                        | Girth                      | 298                              | 298                | 298               | 308                | 308                    |
| <b>External Corner</b><br>          | Dimensions (A x B)         | 231 x 231                        | 231 x 231          | 231 x 231         | 231 x 231          | 231 x 231              |
|                                                                                                                        | Angle                      | 90°                              | 90°                | 90°               | 90°                | 90°                    |
|                                                                                                                        | Girth                      | 462                              | 462                | 462               | 462                | 462                    |
| <b>Internal Corner</b><br>          | Dimensions (A x B)         | 231 x 231                        | 231 x 231          | 231 x 231         | 231 x 231          | 231 x 231              |
|                                                                                                                        | Angle                      | 90°                              | 90°                | 90°               | 90°                | 90°                    |
|                                                                                                                        | Girth                      | 462                              | 462                | 462               | 462                | 462                    |
| <b>Valley Flashing</b><br>          | Dimensions (A x B)         | 231 x 231                        | 231 x 231          | 231 x 231         | 231 x 231          | 231 x 231              |
|                                                                                                                        | Angle                      | 128°                             | 128°               | 128°              | 128°               | 128°                   |
|                                                                                                                        | Girth                      | 462                              | 462                | 462               | 462                | 462                    |
| <b>Roll Top Valley Flashing</b><br> | Dimensions (A x B)         | 231 x 231                        | 231 x 231          | 231 x 231         | 231 x 231          | 231 x 231              |
|                                                                                                                        | Angle                      | 140°                             | 140°               | 140°              | 140°               | 140°                   |
|                                                                                                                        | Girth                      | 462                              | 462                | 462               | 462                | 462                    |
| <b>Under-Over Flashing</b><br>      | Dimensions (A x B)         | 150 x 287                        | 150 x 287          | 150 x 287         | 150 x 287          | 150 x 287              |
|                                                                                                                        | Angle                      | 128°                             | 128°               | 128°              | 128°               | 128°                   |
|                                                                                                                        | Girth                      | 437                              | 437                | 437               | 437                | 437                    |

All dimensions given in millimetres

## PRODUCT DESCRIPTION & FEATURES

Versatile is a premium roofing profile from Safintra Roofing that has the appearance of tiles but the strength and light weight advantage of steel. It is available in a range of colours and in various thicknesses. Local manufacture ensures that Versatile is available in even the smallest quantities, and is a cut to length profile.

All this highlights Versatile as a lightweight, durable and beautiful product that is ideal for the most discerning user.

## MATERIAL OPTIONS


| Aluminium - Zinc          | Gauge (mm) |
|---------------------------|------------|
| AZ150 Colour Coated Steel | 0.50       |

Versatile is rolled in soft material only - G275




## ROOF PITCH

Versatile can be used on a roof pitched from as low as 10°.

|                                      |                                                                                                                  |
|--------------------------------------|------------------------------------------------------------------------------------------------------------------|
|                                      |                              |
| Material Thickness                   | 0.50 mm                                                                                                          |
| Input Coil Width                     | 925 mm                                                                                                           |
| Profiled Sheet Width (Overall Width) | 825 mm                                                                                                           |
| Rib To Rib Width ie: Pitch           | 185 mm                                                                                                           |
| Depth Of Each Tile (Step To Step)    | 300 mm                                                                                                           |
| Effective Cover Width                | 740 mm                                                                                                           |
| Purlin Spacing                       | 600 mm                                                                                                           |
| Ridge Capping                        | Specialised roll top ridge (roll formed or segmented) made from 462mm (slit) coil in same material as roof sheet |

Available in all standard colours.

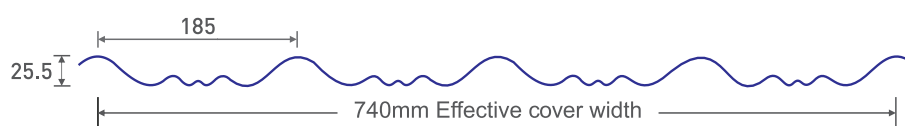

## INSTALLING VERSATILE

### ORDERING AND INSTALLING THE SHEETS

Versatile is a “handed” sheet, because the underlap rib has a capillary break which optimises its water-proofing performance. When ordering, please stipulate the direction in which the sheets will be laid ie: left to right, or right to left.

Sheets are always laid into the prevailing weather – this should guide your installation process, which in turn affects the detail of your order.

Please call our technical department for assistance.

### FASTENING SHEETS FOR ROOFS

Versatile is pierce fixed to steel or timber supports. This means that fastener screws pass through the sheeting. To maximize water tightness, always place roof screws through the crest of the sheeting. Always drive the screws perpendicular to the sheeting and in the center of the crest.

### SIDE LAPPING

A standard lap is 1 flute. It is generally considered good practice to use fasteners along side laps.

### FASTENERS

Safintra recommends only Fixtite or Safintra approved class 3 fasteners for inland regions and class 4 fasteners in coastal regions, especially within 5 kilometres of coastline or similar condition.

Steel: Class 3 (or 4) #12 x 68mm fastener.

Timber: Class 3 (or type 17) #12 x 90mm fastener.

Side Lapping: Class 3 (or 4) #14 x 20mm fastener.


### ROLL TOP RIDGES

Versatile is sold as a complete system, with its own distinctive roll top ridges which are designed to complement the profile.

The roll top ridge is notched, to allow it to be bent into the tiles as a closure.

NOTE: The ridges have matching notches on either side.

During installation, ensure that the Versatile sheets are lined up to fit the notches on both sides of the roof. If laying sheets from left to right on the one face, the sheets on the opposite face should be laid starting from the same side.

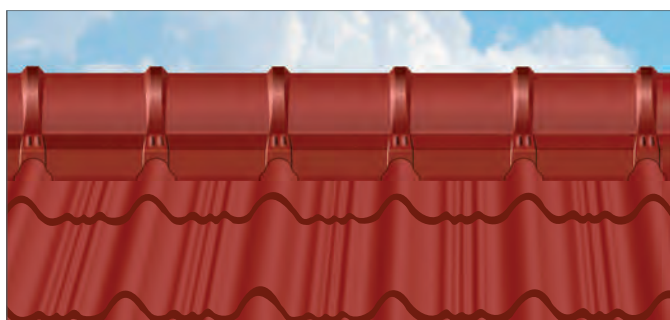

## CUTTING

For cutting thin metal on site, we recommend a circular saw with a metal cutting blade because it produces fewer damaging hot metal particles and leaves less resultant burr than a carborundum disc.

Cut materials over the ground and not over other materials.

Sweep all metallic swarf and other debris from roof areas and gutters at the end of each day and at the completion of the installation. Failure to do so can lead to surface staining when the metal particles rust.

## SEALED JOINTS

For sealed joints use screws or rivets and neutral-cure silicone sealant branded as suitable for use with Aluminium-Zinc coated steel.

## SAMPLE SPECIFICATION

Roofing/Side Cladding shall be Versatile. The profile shall be roll-formed from certified steel and comply with SABS roofing standards and be fixed to steel / timber in strict accordance with manufacturer's specifications.

The roof/side cladding shall be Safintra Versatile material in 0.5mm ZincAl® or Colorplus® material. Versatile shall be obtained from Safintra Roofing. The profile shall be roll-formed with 4 large corrugations at 185mm centres giving a nett cover of 740mm. The rib height shall be 25.5mm. The steel utilised shall be certified and comply with SABS roofing standards.

## STORAGE AND HANDLING

Keep the product dry and clear of the ground. If stacked or bundled product becomes wet, separate and wipe with a clean cloth to dry thoroughly. Handle materials carefully to avoid damage, don't drag materials over rough surfaces or each other, don't drag tools over material, protect from swarf.

## MAINTENANCE

Optimum product life will be achieved if roofs are washed regularly.

### Note:

During installation, clean the roof daily by removing all swarf, pop rivets and unused fasteners or any other debris.



### CRANKING OF PROFILED SHEETING

Cranking of a profiled sheet incorporates lateral rib indentations pressed in at uniform distances which vary according to the radius requirements.

Cranked sheets can be supplied in standard radii as follows:

| PROFILE      | MINIMUM RADIUS<br>(INSIDE CURVE) |
|--------------|----------------------------------|
| SAFLOK 700   | 450mm                            |
| WIDEDEK      | 350mm                            |
| IBR          | 350mm                            |
| CORRUGATED   | 350mm                            |
| INDUSTRIAL 7 | 350mm                            |

NB. Negative (Reverse) Cranking on SAFLOK 700 cannot be performed due to the nature of the profile.

Please contact the manufacturer if any clarification is required.

When ordering cranked sheets, details should be given using our standard information sheet - please contact our technical department at your nearest branch.

### EXPANSION

It should be noted that Aluminium has an expansion co-efficient which is twice that of conventional steel substrates. If the sheet is to be bullnosed on one end, then expansion must be allowed for in the opposite direction.

With the use of Saflok 700 this problem is reduced due to the fact that the profile will slide on the clip.

NB. Profiles can be cranked in Full Hard and commercial quality material but only to a minimum radius of 400mm.

SAFLOK 700 to a minimum of a 450mm radius.



### STANDARD CRANK

Normally with the narrow flute uppermost and the bend away from the angular inclination.

### REVERSE CRANK











Normally with the narrow flute downward and the bend into the narrow flute. Applies to pierced fix profiles only.



These drawings show the various types of bullnosing and cranking available on Safintra sheeting. Before production may commence, we will require a detailed drawing giving all the required data, and duly authorized by the customer.

**Note:**

During installation, clean the roof daily by removing all swarf, pop rivets and unused fasteners or any other debris.

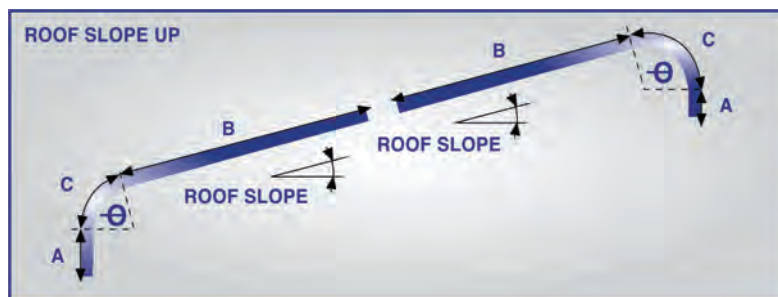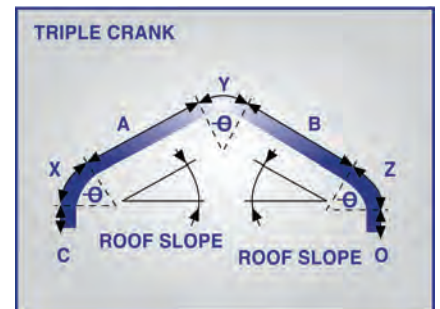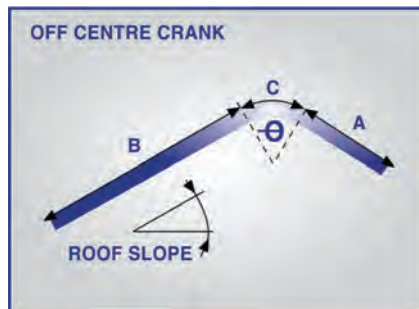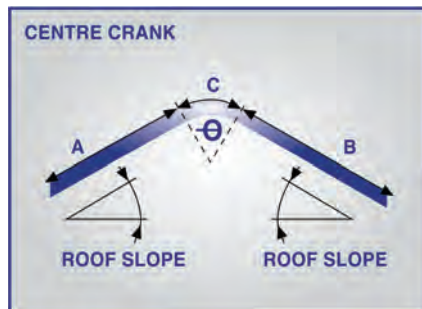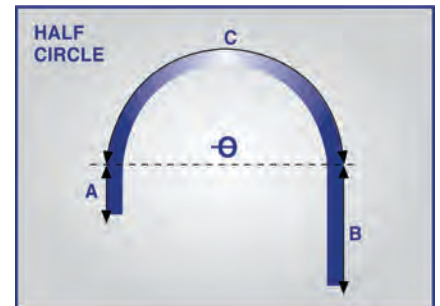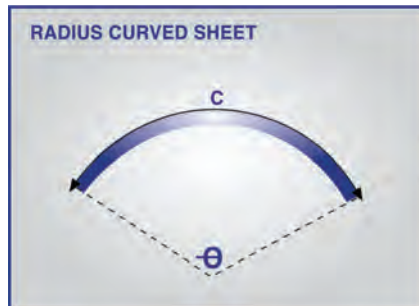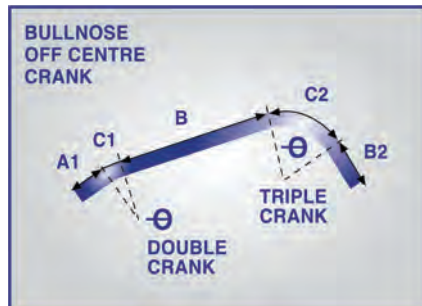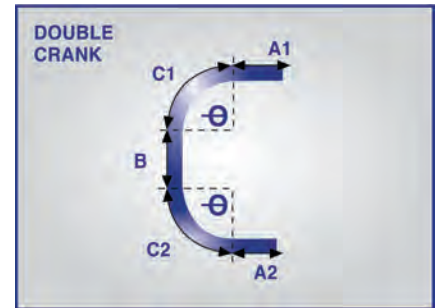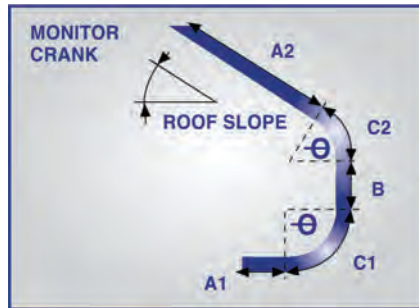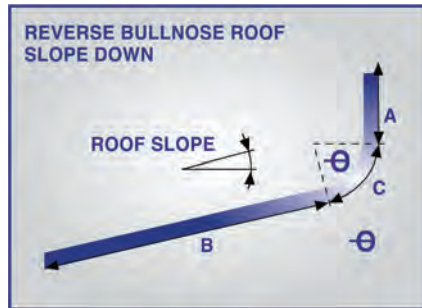

**MINIMUM RADII FOR NATURALLY SPRUNG SHEETING**

| CONVEX       |            | CONCAVE      |            |
|--------------|------------|--------------|------------|
| Saflok       | - 36 meter | Saflok       | - 60 meter |
| IBR          | - 28 meter | IBR          | - 60 meter |
| Widedek      | - 26 meter | Widedek      | - 55 meter |
| Corrugated   | - 23 meter | Corrugated   | - 23 meter |
| Industrial 7 | - 36 meter | Industrial 7 | - 60 meter |

**Disclaimer:**

- Care has been taken to ensure that the information provided is accurate. SAFINTRA does not assume responsibility for inaccuracies or misinterpretations of this data.
- SAFINTRA is continuously engaged in product development, please ensure that you have the most recent issue of information from SAFINTRA.
- Photographs and illustrations are typical examples of roofing and cladding products and applications.

### TRANSPORTATION

Safintra profiles can be supplied in any length, limited only by handling and transport ordinance regulations. The normal length that can be transported by road is 13.2 metres. Saflok 700 and 410 is rolled on-site to any length required.

### STORAGE

#### WET STORAGE STAIN

Steel sheets are normally treated with a special chromate solution, under strictly controlled conditions (i.e. the sheet is passivated) before leaving the Mill. Although this process ensures long and satisfactory protection to sheets, wet storage stain or white rust can still occur. One of the main conditions which may give rise to this problem is sheets being exposed to water while stacked, which restricts air circulation between sheets.

It is therefore important that sheets remain dry and that they do not come into contact with each other at any point if exposed to water. If sheets cannot be stored in a dry storage space, they should be stood on end and spaced out at the bottom.

A drop in temperature after a warm, humid day may also lead to condensation of moisture throughout the stack. And because sheets are often placed on the ground or very close to it, where the temperature is usually at its lowest during the night, the risk of condensation is increased.

The stain that is created does not compromise the integrity of the sheet, but does have a negative impact on the aesthetic value.



### TECHNICAL

#### EDGE WAVE AND OIL CANNING

The amount of edge wave or oil canning is dependant upon the varying mechanical properties of the coil used. Stiffener ribs are incorporated into the troughs to minimise the effects of oil canning.

#### SURFACE CONTAMINATION

Care should be taken to ensure that none of the debris arising from the fixing of a steel roof remains on the sheets after completion of work. If nails, swarf, etc. are allowed to remain on roof sheets, unsightly spots will soon appear. Initially these rust spots will merely be stains from rapidly rusting fine particles of steel, if allowed to develop further, a loss of zinc coating in the stained areas will appear. Nails, particles of steel, etc. will also stain and ultimately reduce the life expectancy of sheets. Sheets are often subject to wet cement splashes that create an area that is subject to alkali attack. Cement splashes should therefore be cleaned off immediately.

#### Note:

During installation, clean the roof daily by removing all swarf, pop rivets and unused fasteners or any other debris.

#### WIND TERRAIN CATEGORIES

It is important to consult an engineer at design stage, to ensure the correct specification of purlin spacing and roof sheet gauge.

#### CORROSION

The coast line of South Africa is a particularly harsh environment which carries coastal chlorides. In urban areas, corrosion is accelerated by the presence of sulphur emissions from industry and traffic. The choice of the correct steel substrate is therefore important to avoid high replacement costs and losses in rentals, etc. Please request additional information from Safintra in this regard.



### CUT TO LENGTH

An additional service is cutting to length and blanking of continuous steel coils.

#### CUT TO LENGTH PRODUCTION CAPACITIES

|                              |                    |
|------------------------------|--------------------|
| Maximum width input coil     | 1250mm             |
| Maximum coil weight          | 5 Ton              |
| Maximum inside coil diameter | 510mm              |
| Material thickness           | From 0.3mm - 1.2mm |




### OTHER SERVICES

Safintra offers on-site rolling, of Saflok 700 and 410.



### TECHNICAL SERVICES

A full technical advisory service is available on request.

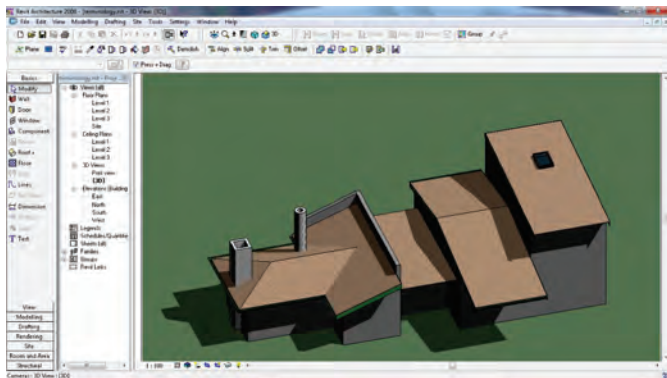

#### Disclaimer:

- Care has been taken to ensure that the information provided is accurate. SAFINTRA does not assume responsibility for inaccuracies or misinterpretations of this data.
- SAFINTRA is continuously engaged in product development, please ensure that you have the most recent issue of information from SAFINTRA.
- Photographs and illustrations are typical examples of roofing and cladding products and applications.



## GREAT LOOKS MEET GREAT VALUE



### A cost effective and aesthetically appealing profile for roofing and cladding

- The deep flute gives the profile its strength with long spanning capabilities.
- The wide pans of Trimflute provide wider coverage per sheet than any other profile available, ideal for budget-sensitive projects.
- The perfect cladding profile to complement Saflok concealed fix roofing.
- Trimflute can be factory cranked, curved and bullnosed to a wide range of radii. For further details contact our Technical Department.

Trimflute is only available from Safintra

**South African operations:-** Johannesburg, Cape Town, Durban, Port Elizabeth, Polokwane, Nelspruit & Bloemfontein. [www.safintra.co.za](http://www.safintra.co.za)

**Additional operations in Africa include:-** Namibia, Botswana, Mozambique, Malawi, Zambia, Angola, Tanzania & Kenya, amongst others. [www.safintra.com](http://www.safintra.com)





# PRE-ENGINEERED AND SPECIALIST PRODUCTS



Clamps for all metal roof attachments

## PRODUCT DESCRIPTION & FEATURES

The metal sheeting and accessory products produced by Safintra are manufactured from the highest quality materials, and conform to the relevant South African National Standards. Safintra will not accept any form of liability for poor performance as a result of the incorrect or inferior materials being used in conjunction with their products.

It is in the best long-term interest of both the installer and end user to ensure that all materials used in an installation are in accordance with the Safintra's published recommendations.

## CHOOSING THE CORRECT CLASS OF FASTENER

It is imperative when using superior corrosion resistant steel roofing, walling and accessory materials that the performance of the fasteners used to fix these materials have the same or superior service life. Specifying the correct fastener for these projects is critical for long term performance and aesthetics to be achieved.

Table 1 gives a general guide to the fastener metal type recommended for various Safintra steel roofing products. In the interest of quality assurance it is essential fasteners used comply with the South African National Standard SANS 1273:2011.

## FASTENER TYPES

There are two fastener designs to be considered for use with Safintra's materials.

- Fixtite Self-drilling screws for fastening cladding to a building structure, and
- Accessory fasteners for fastening roofing accessory items such as flashings and S-5 clamps.

Where accessory fasteners such as pop rivets are required, they should be manufactured from aluminium when fastening Zinc Aluminium coated steel. However, in the case of Stainless Steel, compatible stainless steel pop rivets must be used.

## COMPATIBILITY

Stainless steel, Lead, Copper, and copper containing alloys (such as MONEL) should not be used in conjunction with Zinc Aluminium or pre-painted steel.

## WASHERS USED WITH FASTENERS

The rubber washer component of self-drilling screws must be manufactured from materials compatible with the roofing material.



Washers containing significant levels of conductive carbon black fillers are NOT suitable for use with Zinc Aluminium alloy coated and pre-painted Zinc Aluminium coated alloy products, particularly in marine environments.

*Therefore fasteners must be assembled with substantially carbon-black-free washers.*

## SHANK CORROSION



In certain applications the fastener may be exposed to a greater risk of corrosion as a result of specific internal environments ( e.g. high condensation, specific service environments such as intensive animal farming ). Under the South African National Standards corrosion classification is based on the fastener heads rather than the shanks. Please consult Safintra regarding shank corrosion within the specific application area of each project.

## FIXTITE® COATING & WARRANTY GUIDE

| CORROSION CLASS                                             | C3<br>                                     | C4<br>                                                     |
|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| ENVIRONMENT CORROSION                                       | Average                                                                                                                       | High                                                                                                                                           |
| OUTDOORS                                                    | Atmospheres with moderate levels of airborne pollution.<br>Coastal areas with low salt levels.<br>Urban and industrial areas. | Atmospheres with discernible levels of airborne pollution.<br>Coastal areas with moderate salt levels.<br>Industrial areas.                    |
| INDOORS                                                     | Areas with moderate levels of humidity and some airborne pollution from production process.<br>Laundries, breweries, dairies. | Areas with high levels of humidity and considerable airborne pollution from production process.<br>Chemical plants, swimming pools, dockyards. |
| STEEL                                                       |                                                                                                                               |                                                                                                                                                |
| MASS LOSS (g/m <sup>2</sup> )                               | > 200 - 400                                                                                                                   | > 400 - 650                                                                                                                                    |
| THICKNESS REDUCTION (µm)                                    | > 25 - 50                                                                                                                     | > 50 - 80                                                                                                                                      |
| ZINC                                                        |                                                                                                                               |                                                                                                                                                |
| MASS LOSS (g/m <sup>2</sup> )                               | > 5 - 15                                                                                                                      | > 15 - 30                                                                                                                                      |
| THICKNESS REDUCTION (µm)                                    | > 0.7 - 2.1                                                                                                                   | > 2.1 - 4.2                                                                                                                                    |
| RECOMMENDED FASTENER MATERIAL AND MINIMUM SURFACE TREATMENT | Carbon Steel<br>+<br>FIXTITE® CS                                                                                              | Carbon Steel<br>+<br>FIXTITE® HD                                                                                                               |
| WARRANTY PERIOD                                             | 20 Years                                                                                                                      | 30 Years                                                                                                                                       |

Environmental Categorisation as per Swedish Standards, SS-EN-ISO 12944-2

ALL FIXTITE FASTENERS CARRY A MANUFACTURER'S WARRANTY AND COMPLY WITH SANS1273-2009 (AS3566.2-2002) STANDARDS  
ALL SAFINTRA ROOF SYSTEMS WILL ONLY BE WARRANTED IF INSTALLED WITH SAFINTRA-APPROVED FASTENERS.






| How to read our fastener sizes                                                                  |                                                                                          |                                                                          |                                                                                                                                                                        |
|-------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Gauge                                                                                           | Threads Per Inch                                                                         | Length                                                                   |                                                                                                                                                                        |
| <b>12</b>                                                                                       | <b>14</b>                                                                                | <b>75mm</b>                                                              |                                                                                                                                                                        |
| (Diameter of shank excluding thread)<br>#8 - 4.2mm<br>#10 - 4.8mm<br>#12 - 5.5mm<br>#14 - 6.3mm | Number of thread crests that can be counted along a lineal measurement of 1 inch. (TPI). | Overall length of shank including drill point, up to shank beneath head. |   |

**NOTES:**




- All Safintra Fixtite Fasteners used for our pierced fix profiles are Class 4 only, as this will provide optimal service life with aluminium-zinc coated steel.
- Different lengths/types of fasteners are available on request, including stainless steel.
- For optimal performance, the service life warranty of fasteners must match the service life warranty of the sheeting.
- Only Class 3 and 4 fasteners are suitable for use with Aluminium-Zinc coated steel (unpainted or pre-painted).
- Class 4 fasteners must be used within 1km of coast, river and in all corrosive environments.
- Aluminium roof sheeting: use ONLY stainless steel fasteners.




## FIXTITE FASTENER APPLICATION GUIDE

### METAL APPLICATIONS

|                                                                                                                                                                                                                                                                    |                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| <b>#12 x 22mm Metalfix wafer head square drive</b><br><br>For concealed fix onto metal (Saflok 700, Saflok 410 & Newlok)<br><br>Code: FN0400<br>                                 | <b>Class 3</b> |
| <b>#12 x 65mm Metalfix hex head washer flange, EPDM seal</b><br><br>For trapezoidal onto metal (Tufdek IBR, Widedek, Fluteline, Trimflute)<br><br>Code: FN0409<br>              | <b>Class 4</b> |
| <b>#12 x 38mm Metalfix hex head washer flange, EPDM seal</b><br><br>For pierced fix onto metal (Classicorr Corrugated)<br><br>Code: FN0407<br>                                  | <b>Class 4</b> |
| <b>#14 x 22mm Metalfix stitching screw, hex washer flange, EPDM seal, tapered</b><br><br>For stitching of sheeting & flashings, and use with S-5 clamps<br><br>Code: FN0412<br> | <b>Class 4</b> |
| <b>#12 x 25mm Metalfix hex head washer flange, EPDM seal</b><br><br>For side cladding onto metal<br><br>Code: FN0413<br>                                                        | <b>Class 4</b> |

### TIMBER APPLICATIONS

|                                                                                                                                                                                                                                                          |                |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| <b>#12 x 45mm Timberfix wafer head square drive</b><br><br>For concealed fix onto timber (Saflok 700, Saflok 410 & Newlok)<br><br>Code: FN0401<br>                    | <b>Class 3</b> |
| <b>#12 x 85mm Timberfix hex head washer flange, EPDM seal</b><br><br>For trapezoidal onto timber (Tufdek IBR, Widedek, Fluteline, Trimflute)<br><br>Code: FN0411<br> | <b>Class 4</b> |
| <b>#12 x 65mm Timberfix hex head washer flange, EPDM seal</b><br><br>For pierced fix onto timber (Classicorr Corrugated)<br><br>Code: FN0410<br>                     | <b>Class 4</b> |

|                                                                                                                                                                                                                      |                                                                                                                                                                                                                      |                                                                                                                                                                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>6 x 19mm Aluminium washer with EPDM seal</b><br><br>For high wind conditions with pierced fix profiles<br><br>Code: FN0414<br> | <b>6 x 25mm Aluminium washer with EPDM seal</b><br><br>For high wind conditions with pierced fix profiles<br><br>Code: FN0415<br> | <b>Fixtite square drive</b><br><br>For wafer head screws<br><br>Code: FN0408<br> |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|




## MULTIWALL POLYCARBONATE SHEETING SYSTEMS



**TOPGAL** Standing Seam System



**SEPLUX** Interlocking Panel System

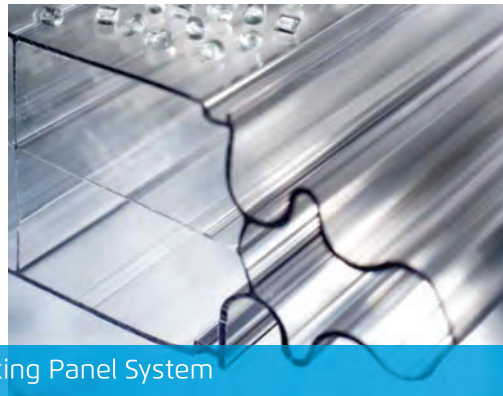

**CLEARDEK®** is a new generation of multiwall polycarbonate panel systems that allow for the ingress of natural light, yet is very strong, and provides thermal insulation. CLEARDEK may be used in a wide variety of roofing and cladding designs, flat or cold (spring) curved.

- Controlled daylight transmission
- High thermal insulation and UV protection
- Withstands high wind loads
- High impact strength - virtually unbreakable
- Resistance to extremes in temperature and improves functional performance
- Lightweight, easy and fast to install, no heavy substructure required
- Can be cold curved - see page 3 for radii
- Flame retardant- no need to add extinguishing or fire-retardants materials
- Naturally absorbs sound, reducing the need for acoustic insulation.
- 100% recyclable - environmentally friendly

### Typical Applications:

#### TOPGAL

#### STANDING SEAM SYSTEM

- Roofing
- Walkways, entrances and open recreation areas
- Decorative interior and exterior cladding



#### INTERLOCKING PANEL SYSTEM


- Cladding
- Facades
- Decorative interior walling and partitions

## TOPGAL

The **CLEARDEK STANDING SEAM** system called **TOPGAL** is engineered to be fixed by clips which fasten under the seam, allowing the panels to be clamped in place without any fastener penetration through the panels. This makes the standing seam system both watertight and long lived.

The panels range from 3-7 layer multiwall construction which gives it the inherent strength to withstand high wind loads, and also provide outstanding R values.

CLEARDEK STANDING SEAM is based on two unique features: The under-sheet clips which fix the sheeting to the purlins accommodate thermal expansion and contraction, and an outer seam over the raised flanges on the side laps make for a water-tight surface area.



**TOPGAL standing seam system for optimum water tightness**

The **Topgal** system is supplied complete with polycarbonate or aluminum joiners, end-caps, and edging profiles to create a robust fully framed installation which is highly watertight.

- Can be used on roofs with min 7 degree slope
- 3 to 7 layer multiwall structure for high strength
- Guaranteed for 10 years against discolouration, defect



## 40<sup>5PX</sup> SEPLUX

The **CLEARDEK INTERLOCKING PANEL** system called **SEPLUX** is engineered with an interlocking male female joint which provides strength and weatherproofing.

The panels range from 3-9 layer multiwall construction which gives it the inherent strength to withstand high wind loads, and also provide outstanding R values.



**SEPLUX interlocking panel system for strength and aesthetics**

The male-female interlock provides lateral strength, allowing the system to stand up to full wall height without the use of lateral supports, making for a clean look which is modern and flexible in application, whether inside or outside. It also provides a completely flat surface for graphics (silk screening), permits the easy installation of window and door apertures and its acoustic properties make it ideal for space partitioning in offices and public spaces.

Aluminium framing on all four sides provides strength and stability.

- Weight of 4kg / m<sup>2</sup> - half the weight of glass of same strength
- 2 x more effective than double glazing
- Can stand 2,5 m high with no lateral support
- Reduces sound by 17 dB
- 5 wall structure for high strength and rigidity
- Guaranteed for 10 years against discolouration, defect





## Colours and Optical Properties





Colours below are standard items - additional colours are available but subject to special order conditions.

| Colour           | TOPGAL             |      | TOPGAL                  |      | SEPLUX                  |      |
|------------------|--------------------|------|-------------------------|------|-------------------------|------|
|                  | 10mm Standing Seam |      | 16mm/20mm Standing Seam |      | 40mm Interlocking Panel |      |
|                  | LT (%)             | SHGC | LT (%)                  | SHGC | LT (%)                  | SHGC |
| Clear            | 65                 | 0.6  | 49                      | 0.51 | 76                      | —    |
| Bronze           | 30                 | 0.5  | 20                      | 0.39 | —                       | —    |
| Ice / Opal       | 20                 | 0.36 | 20                      | 0.32 | 38                      | —    |
| Blue             | 30                 | 0.59 | 20                      | 0.43 | —                       | —    |
| Polyshade Silver | 12                 | 0.27 | 12                      | 0.26 | —                       | —    |

- LT - Light Transmission in % according to ASTM D-1003, measured between ribs.
- SHGC - Solar Heat Gain Coefficient is the ratio of solar heat gain through the sheet and the incident solar radiation. It takes into account all conduction, convection and radiation effects involved.
- Panels have UV protection on both sides or one side, upon customer request. (Standard products in stock have UV protection one side - clearly indicated on the product).

## Product Specifications

Detailed installation & accessory brochures are available in soft copy on request.

| Panel                                                                                                            | Thickness (mm) | Width of Panel (mm) | Dead Load (kg/m <sup>2</sup> ) | Recommended Purlin Spacing (mm) ave. | R-Value | Minimum Radius for Cold Bending (m) |
|------------------------------------------------------------------------------------------------------------------|----------------|---------------------|--------------------------------|--------------------------------------|---------|-------------------------------------|
| TOPGAL Standing Seam 10mm<br> | 10             | 600                 | 2.5                            | 750                                  | 0.476   | 2.0                                 |
| TOPGAL Standing Seam 16mm<br> | 16             | 600                 | 3.3                            | 900                                  | 0.555   | 3.2                                 |
| TOPGAL Standing Seam 20mm<br> | 20             | 1000                | 3.5                            | 1000                                 | 0.666   | 4.0                                 |
| SEPLUX Panel System 40mm<br>  | 40             | 435                 | 4.0                            | N/A                                  | 0.833   | 8.0                                 |

- Dead Load is a weight of 1m<sup>2</sup> of Topgal system, includes installation accessories
- Other thicknesses available on special request

## Technical Data

|                                           | TOPGAL              | 40 <sup>5</sup> PX SEPLUX |
|-------------------------------------------|---------------------|---------------------------|
| Linear Expansion                          | 0.065mm/m °C        | 0.065mm/m °C              |
| Service Temperature                       | -40°C - +120°C      | -40°C - +120°C            |
| Fire Resistance Rating                    | B-s1,d0             | Self Extinguish B-s1,d0   |
| Certification                             | EN-13823/EN-11925-2 | EN-14351-1/EN-13830       |
| Possible Expansion due to Heat & Moisture | 2mm - 4mm/m         | 2mm - 4mm/m               |

## GREEN BENEFITS AND SUSTAINABILITY OF CLEARDEK MULTIWALL SYSTEMS

By Ezra Laudon - Architect

CLEARDEK Multiwall Polycarbonate systems are a perfect option for large architectural installations from swimming pool enclosures and shopping centres to office buildings or street furniture.

The many green advantages of the CLEARDEK Multiwall Polycarbonate systems, combined with light-weight and easy installation, provide an economical and sustainable option for use in all building projects.

CLEARDEK Multiwall Polycarbonate systems offer all the advantages of polycarbonate: light weight, letting in natural light, UV resistant, impact resistant, with easy installation. Being engineered as multi-skin extrusions, the profiles trap air to deliver high R values and a more energy efficient building. There is no need for metal glazing profiles and a heavy subframe.

Manufactured with a single sided or 2 sided UV coating, a building facade or roofing installation made with CLEARDEK Multiwall Polycarbonate systems is guaranteed to stand the test of time.

### In roofing, sustainability is defined as:

- using less material but delivering better performance during a longer service life
- being thermally efficient / contributing to a reduction in greenhouse gasses during its useful occupied life
- being ultimately recyclable

### "Green" benefits of CLEARDEK Multiwall Polycarbonate systems include:

- Excellent thermal insulation reduces the amount of electricity required to heat the building in winter, and cool it in summer.
- The use of natural daylight reduces demand for artificial lightning.
- By blocking UV rays, it provides a healthier interior for humans and furniture.
- Lightweight material does not need a heavy subframe, so uses less materials and accessories, and reduces transportation energy.
- Fully recyclable.



The right way to attach almost anything to metal roofs!

# S-5!®

## The Right Way

### S-5-K Grip™ Clamp

The S-5-K Grip™ clamp was specifically developed to fit Saflok® and similar bulb snap-together seams. The design utilizes multiple inserts used for a variety of bulb snap-together profiles. Each insert has a unique shape that allows for a tight fit and provides increased holding strength for that profile.

The head of the flanged bolts control the amount of compression, which reduces the possibility of over-compressing the seam.

Just place the clamp on the seam, position the insert piece, and tighten the flanged bolts at the base. Then, affix ancillary items using the top bolt provided. Go to: [www.S-5.com/tools](http://www.S-5.com/tools) for information about properly attaching S-5!® clamps.


#### S-5-K Grip™ Mini Clamp

The S-5-K Grip Mini is a bit shorter than the S-5-K Grip and has one base bolt rather than two. The mini is the choice for attaching all kinds of rooftop accessories: solar arrays, signs, walkways, satellite dishes, antennas, rooftop lighting, lightning protection systems, exhaust stack bracing, conduit, condensate lines, mechanical equipment—just about anything!

**S-5-K Grip™ is a non-piercing clamp. It was specifically developed to fit Saflok® and similar bulb snap-together seams, and will not void warranties on Safintra concealed-fix roofing.**

S-5! PV kits have an M8 bolt and are suitable for use with all S-5! clamps.

1




2



3



4



S-5-K Grip™ and S-5-K Grip™ Mini



The S-5-K Grip™ eliminates the large moment arm and features a low mounting surface area with the mounting bolt directly over the centre of the seam, which dramatically increases the strength of the clamp.

The S-5-K Grip™ and S-5-K Grip Mini clamps are each furnished with the hardware shown to the right. A structural aluminum attachment clamp, the S-5-K Grip is compatible with most common metal roofing materials excluding copper. All included hardware is stainless steel.

## S-5!® holding strength is unmatched in the industry.

The S-5-K Grip clamp has been tested for load-to-failure results on a variety of standing seam roof profiles from leading panel manufacturers. For design assistance, contact Safintra South Africa (and see our website [www.safintra.co.za](http://www.safintra.co.za)), or visit [www.S-5.com](http://www.S-5.com) for the independent lab test data that can be used for load-critical designs and applications. Also, please visit S-5! website for more information including metallurgical compatibilities and specifications.

## Example Profiles


**SAFLOK 410**  
concealed fix roofing

**SAFLOK 700**  
concealed fix roofing


## Insert Options

### Safintra Saflok 410 and similar profiles

S-5-GX 10 Insert




S-5-GXM 10 Mini Insert




### Safintra Saflok 700 and similar profiles

S-5-GX 50 Insert




S-5-GXM 50 Mini Insert




## S-5-K Grip™

(With S-5-GX 10 Insert)

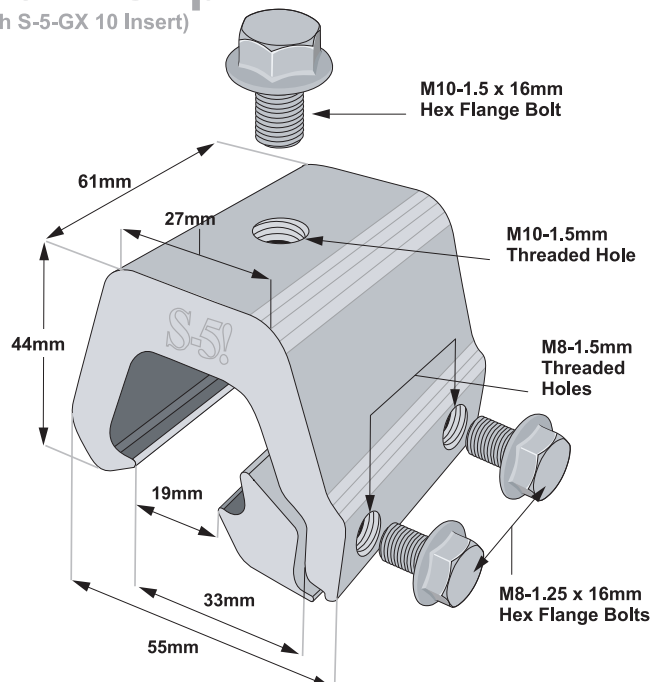

## S-5-K Grip™ Mini

(With S-5-GX 10 Mini Insert)

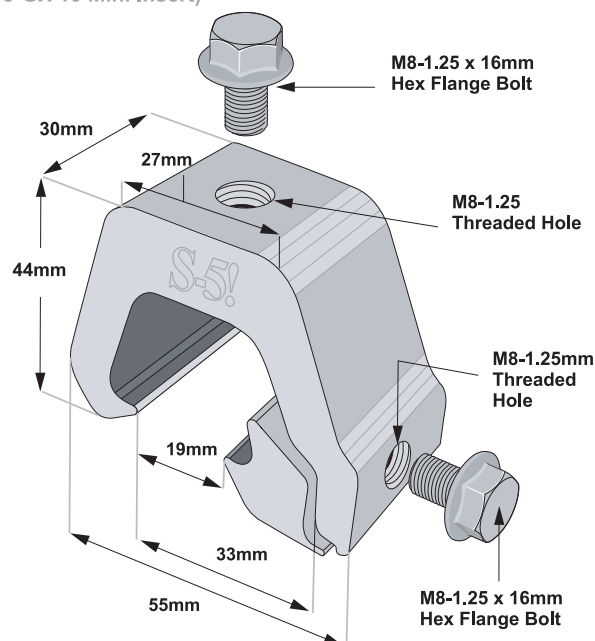

Please note: All measurements are rounded to the second decimal place

## S-5!® Warning! Please use this product responsibly!

S-5! Brackets and clamps are not tested for performance as part of a Fall Arrest or Personal Safety system. These applications need to be tested as a dynamic system and warranties or test results must be issued by the system provider. Safintra, Safal Group and its subsidiaries provide no warranties or any assurances in this application, and will accept no claims of any nature whatsoever arising out of any such applications.

Products are protected by multiple international patents. For published data regarding holding strength, bolt torque, patents and trademarks visit the S-5! website at [www.S-5.com](http://www.S-5.com).

Copyright 2013, Metal Roof Innovations, Ltd. S-5! products are patent protected. S-5! Aggressively protects its patents, trademarks and copyrights.

Published December 2015

Sole Agents for Africa:

**SAFINTRA**  
world class roofing systems

[www.safintra.co.za](http://www.safintra.co.za) / [www.safintra.com](http://www.safintra.com)



# S-5!!

## The Right Way!

### S-5-H90 Clamp

The S-5-H90 is a one-piece clamp that was developed to securely and cost-effectively accommodate metal roof panels with a horizontal seam greater than 16.5mm.

Turning the clamp 90 degrees so that the bolt hole side is facing up, slip the clamp on the seam and tighten the setscrews. Go to [www.S-5.com/tools](http://www.S-5.com/tools) for information about properly attaching S-5!® clamps.

After the clamp is installed, affix ancillary items using either of the two threaded bolt holes and bolt provided.


### S-5-H90 Mini Clamp

The S-5-H90 Mini is a bit shorter than the S-5-H90 and has one setscrew and one threaded bolt hole rather than two. The mini is the choice for attaching all kinds of rooftop accessories: signs, walkways, satellite dishes, antennas, rooftop lighting, lightning protection systems, solar arrays, exhaust stack bracing, conduit, condensate lines, mechanical equipment—just about anything!\*


**\*Note:**

- Installation diagrams above illustrate S-5! Standard clamp
- The S-5! mini clamp is a standard stock item for Safintra South Africa. The Standard clamp is available on order, and subject to a 6-8 week delivery.


1




2



3



S-5-H90 and S-5-H90 Mini

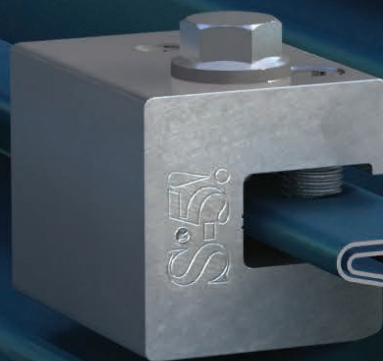

The one-piece S-5-H90 clamp was developed to fit standing seam panels with horizontal seams.



The strength of the S-5-H90 clamp is in its simple design. The patented setscrews will slightly dimple the metal seam material but will not puncture it—leaving roof manufacturers' warranties intact.

The **S-5-H90** and **S-5-H90 Mini** clamps are each furnished with the hardware shown to the right. Each box also includes a bit tip for tightening setscrews using an electric screw gun. The structural aluminum attachment clamp is compatible with all common metal roofing materials excluding copper. All included hardware is stainless steel.

The S-5-H90 clamp has been tested for load-to-failure results on a variety of horizontal standing seam roof profiles from leading panel manufacturers. For design assistance, contact Safintra South Africa (and see our website [www.safintra.co.za](http://www.safintra.co.za)) or visit [www.S-5.com](http://www.S-5.com) for the independent lab test data that can be used for load-critical designs and applications. Also, please visit the S-5! website for more information including metallurgical compatibilities, and specifications.


## Example Profiles

**NEWLOK**  
standing seam roofing




Newlok profile - seamed

## S-5-H90 Standard

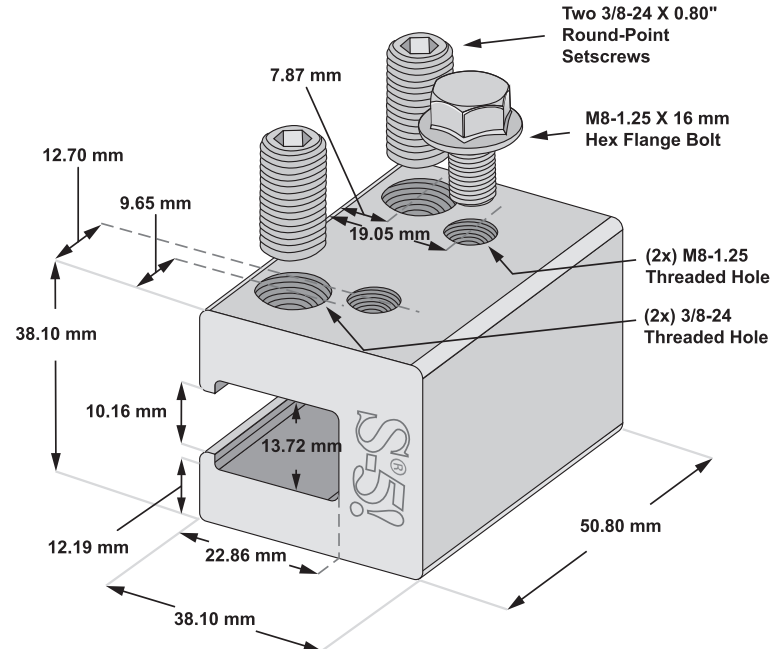

## S-5-H90 Mini

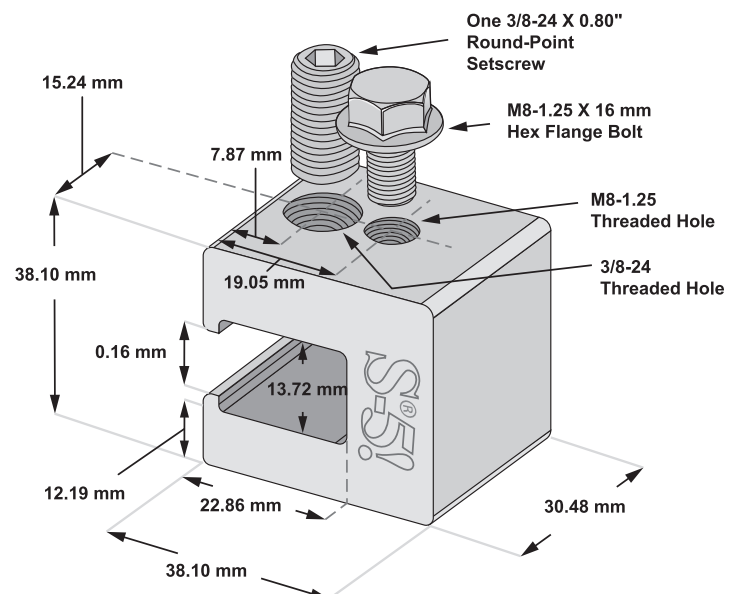

### S-5!® Warning! Please use this product responsibly!

S-5! Brackets and clamps are not tested for performance as part of a Fall Arrest or Personal Safety system. These applications need to be tested as a dynamic system and warranties or test results must be issued by the system provider. Safintra, Safal Group and its subsidiaries provide no warranties or any assurances in this application, and will accept no claims of any nature whatsoever arising out of any such applications.

Products are protected by multiple international patents. For published data regarding holding strength, bolt torque, patents and trademarks visit the S-5! website at [www.S-5.com](http://www.S-5.com).

Copyright 2013, Metal Roof Innovations, Ltd. S-5! products are patent protected. S-5! Aggressively protects its patents, trademarks and copyrights.

Published December 2015

Sole Agents for Africa:

**SAFINTRA**  
world class roofing systems


[www.safintra.co.za](http://www.safintra.co.za) / [www.safintra.com](http://www.safintra.com)

The right way to attach almost anything to metal roofs!


# S-5!®

## The Right Way

1



2



### S-5! CorruBracket™

CorruBracket™ is compatible with 16-18mm corrugated roofing profiles. CorruBracket is affixed to the crest of the corrugation, leaving the valleys free of holes. S-5! CorruBracket comes with a factory-applied EPDM rubber gasket seal protecting against leaks.


S-5! CorruBracket is mounted directly onto the crest of the corrugation, straddling the valley. No surface preparation is necessary; simply wipe away excess oil and debris, align, and apply. Secure directly into the crest of the corrugation by driving the appropriate screws into the six pre-punched holes, or pre-drilling the proper sized hole through the six pre-punched holes and riveting.

#### S-5!® CorruBracket™ Mini

The Mini is shorter than the Standard, and has only one fastener hole on each side.

**S-5!® CorruBracket™ is the right way to attach almost anything to Safintra's Classicorr corrugated and all other 16-18mm corrugated sheeting.**

S-5! PV kits have an M8 bolt and are suitable for use with all S-5! clamps.

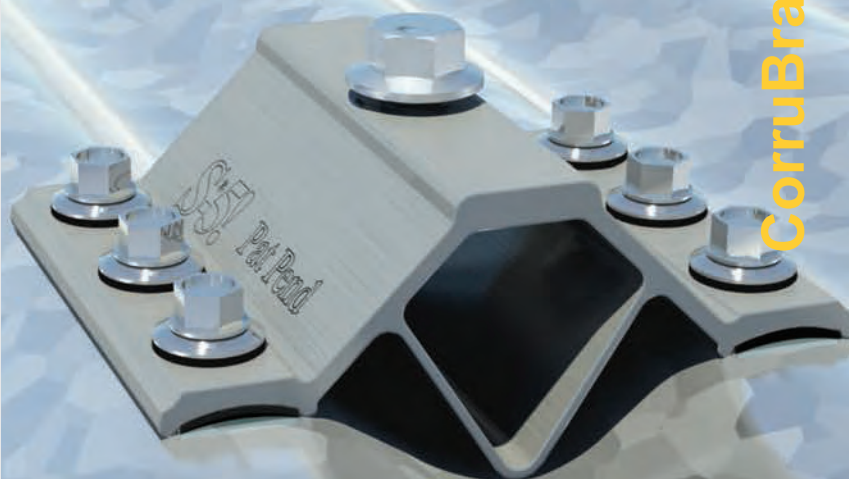

CorruBracket™ and CorruBracket™ Mini


S-5! CorruBracket™ can be used for almost any attachment need on Safintra Classicorr corrugated and other 16-18mm corrugated metal sheeting.

## S-5! CorruBracket™

**S-5!® holding strength is unmatched in the industry.**


Each S-5! CorruBracket™ comes with factory-applied EPDM rubber gaskets on the base. A structural aluminum attachment bracket, CorruBracket is compatible with most common metal roofing materials.

For design assistance, contact Safintra South Africa (and see our website [www.safintra.co.za](http://www.safintra.co.za)), or visit [www.S-5.com](http://www.S-5.com) for the independent lab test data that can be used for load-critical designs and applications. Also, please visit S-5! website for more information including metallurgical compatibilities and specifications.

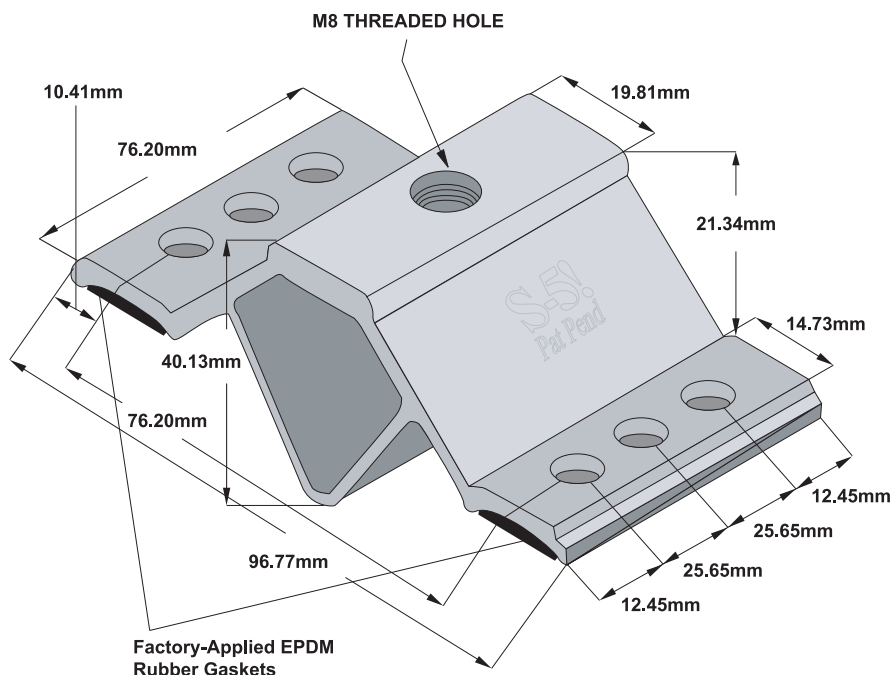


Please note: All measurements are rounded to the second decimal place

classi**corr**  
~~~~~ corrugated

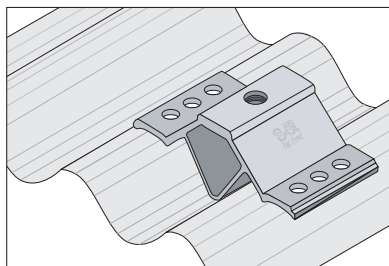

CorruBracket™ - Standard Size
Note three fastener holes on each side.

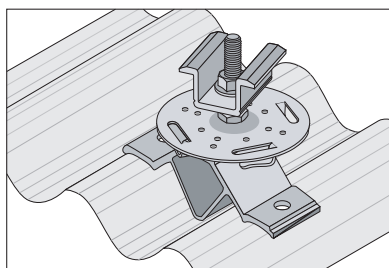

CorruBracket™ - Mini
with PV-Kit attachment.
Note single fastener hole on each side.

S-5!® Warning! Please use this product responsibly!

S-5! Brackets and clamps are not tested for performance as part of a Fall Arrest or Personal Safety system. These applications need to be tested as a dynamic system and warranties or test results must be issued by the system provider. Safintra, Safal Group and its subsidiaries provide no warranties or any assurances in this application, and will accept no claims of any nature whatsoever arising out of any such applications.

Products are protected by multiple international patents. For published data regarding holding strength, bolt torque, patents and trademarks visit the S-5! website at www.S-5.com.

Copyright 2013, Metal Roof Innovations, Ltd. S-5! products are patent protected. S-5! Aggressively protects its patents, trademarks and copyrights.

Published December 2015

Sole Agents for Africa:


SAFINTRA
world class roofing systems

www.safintra.co.za / www.safintra.com


S-5!®

The Right Way

1



2



TrapBracket™

The right way to attach almost anything to metal roofs!

TrapBracket™

TrapBracket™ can be used to mount Safintra's Tufdek IBR, Widedek and most other similar exposed-fastened trapezoidal roof profiles.

The TrapBracket comes with a factory-applied EPDM rubber gasket seal already on the base, and the S-5!® patented reservoir conceals the EPDM from UV exposure, preventing drying and cracks.

The TrapBracket is mounted directly onto the crown of the panel, straddling the profile. No surface preparation is necessary; simply wipe away excess oil and debris, align and apply. Secure through the pre-punched holes using the appropriate S-5! fasteners.

TrapBracket is the perfect match for the S-5-PV Kit, and facilitates quick and easy installation.

S-5!® TrapBracket™ is the right way to attach almost anything to exposed-fastened trapezoidal roof profiles.

S-5! PV kits have an M8 bolt and are suitable for use with all S-5! clamps.




TrapBracket™ is the perfect attachment solution for most trapezoidal exposed-fastened metal roofs! It can be used for almost any attachment need. No messy sealants to apply: the factory-applied EPDM rubber gasket weather-proofs and makes installation easy.


S-5!® holding strength is unmatched in the industry.

Each **TrapBracket™** comes with a factory-applied EPDM rubber gasket on the base. All pre-punched holes must be used to achieve tested strength.

For design assistance, contact Saffintra South Africa (and see our website www.saffintra.co.za), or visit www.S-5.com for the independent lab test data that can be used for load-critical designs and applications. Also, please visit S-5! website for more information including metallurgical compatibilities and specifications.

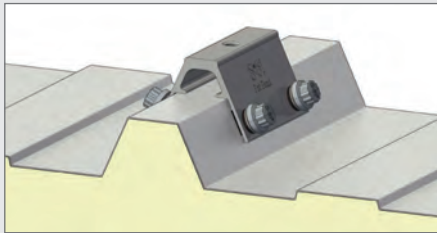


All 4 punched holes must be used to achieve tested strength.

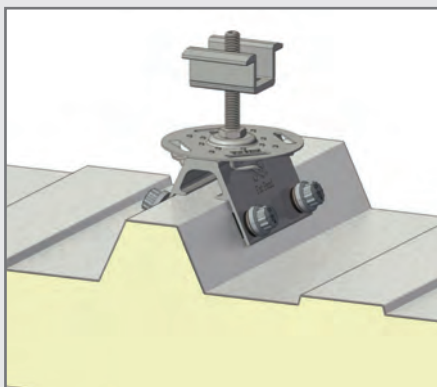

The above illustration demonstrates the TrapBracket with the S-5-PV Kit attached.

TrapBracket™

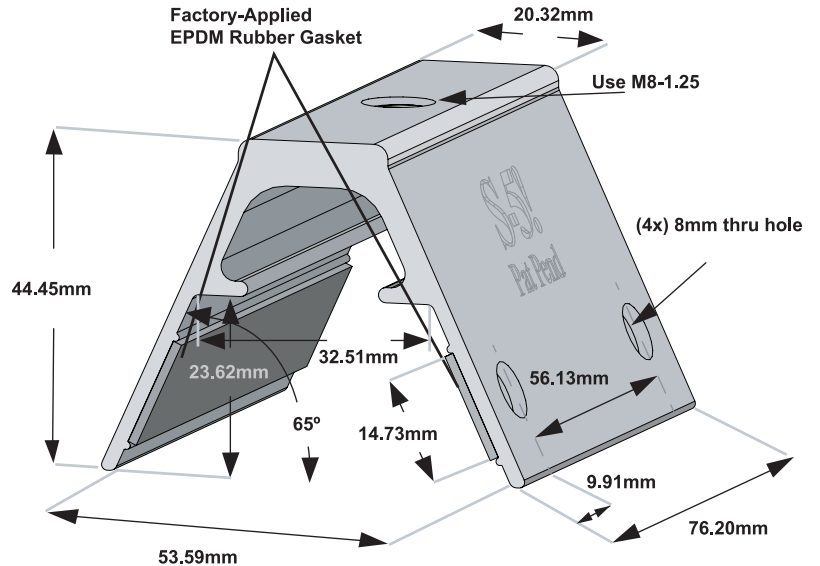

Please note: All measurements are rounded to the second decimal place.

TUFDEK[®] iBR



S-5!® Warning! Please use this product responsibly!

S-5! Brackets and clamps are not tested for performance as part of a Fall Arrest or Personal Safety system. These applications need to be tested as a dynamic system and warranties or test results must be issued by the system provider. Saffintra, Safal Group and its subsidiaries provide no warranties or any assurances in this application, and will accept no claims of any nature whatsoever arising out of any such applications.

Products are protected by multiple international patents. For published data regarding holding strength, bolt torque, patents and trademarks visit the S-5! website at www.S-5.com.

Copyright 2013, Metal Roof Innovations, Ltd. S-5! products are patent protected. S-5! Aggressively protects its patents, trademarks and copyrights.

Published December 2015

Sole Agents for Africa:

SAFINTRA
world class roofing systems

www.saffintra.co.za / www.saffintra.com

The right way to attach almost anything to metal roofs!

S-5!®

The Right Way

ProteaBracket™


ProteaBracket™ is the most versatile attachment solution on the market, fitting most metal trapezoidal sheet profiles with and without intermediate insulation. It features an adjustable attachment base and multiple solar module attachment options (illustrated on back) to accommodate varying widths and heights. There are no messy sealants to apply and no chance for leaks; the ProteaBracket comes with factory-applied, adhesive rubber sealant to ensure quick installation and a weather-proof fit.

The ProteaBracket is mounted directly onto the crown of the panel, straddling the profile. No surface preparation is necessary; simply wipe away excess oil and debris, align, and apply. Secure ProteaBracket through all 6 pre-punched holes.


ProteaBracket is the perfect match for the S-5-PV Kit, for a solar attachment solution that is both economical and easy to use.

S-5!® ProteaBracket™ is a versatile bracket that adjusts easily to most trapezoidal roof profiles.

S-5! PV kits have an M8 bolt and are suitable for use with all S-5! clamps.

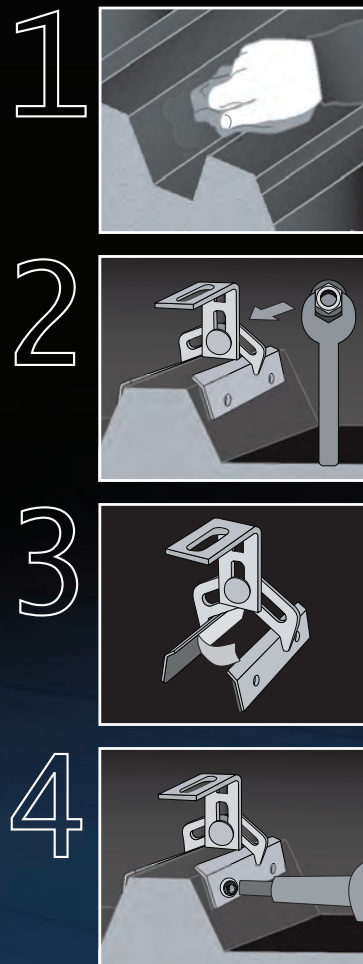

ProteaBracket™

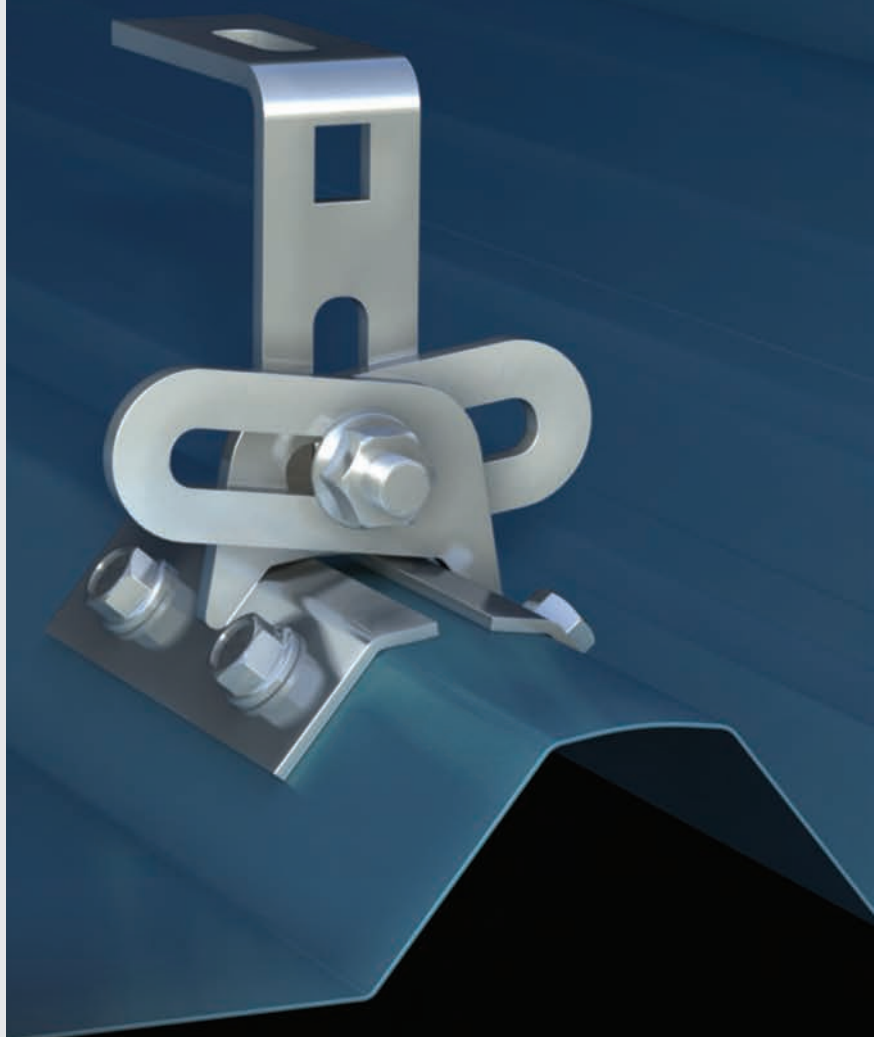

ProteaBracket™ is the perfect solar attachment solution for most trapezoidal exposed-fastened metal roof profiles. No messy sealants to apply: the factory-applied adhesive rubber sealant weather-proofs and makes installation easy.

S-5!® holding strength is unmatched in the industry.

Each **ProteaBracket™** comes with a factory-applied, adhesive rubber sealant on the base. A structural A2 stainless steel bimetal attachment bracket, ProteaBracket is compatible with most common metal roofing materials.

All four pre-punched holes must be used to achieve tested strength. For design assistance, contact Safintra South Africa (and see our website www.safintra.co.za), or visit www.S-5.com for the independent lab test data that can be used for load-critical designs and applications. Also, please visit S-5! website for more information including metallurgical compatibilities and specifications.

Multiple Attachment Options:


ProteaBracket™ with Top Rail option for PV attachment



ProteaBracket™ with S-5-PV Kit option (if not using a rail)



ProteaBracket™

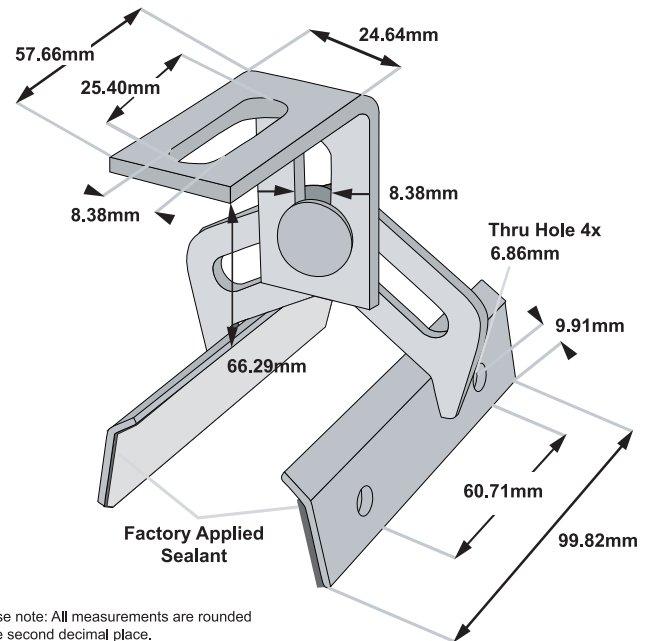

FLUTELINE



VERSATILE



S-5!® Warning! Please use this product responsibly!

S-5! Brackets and clamps are not tested for performance as part of a Fall Arrest or Personal Safety system. These applications need to be tested as a dynamic system and warranties or test results must be issued by the system provider. Safintra, Safal Group and its subsidiaries provide no warranties or any assurances in this application, and will accept no claims of any nature whatsoever arising out of any such applications.

Products are protected by multiple international patents. For published data regarding holding strength, bolt torque, patents and trademarks visit the S-5! website at www.S-5.com.

Copyright 2013, Metal Roof Innovations, Ltd. S-5! products are patent protected. S-5! Aggressively protects its patents, trademarks and copyrights.

Published December 2015

Sole Agents for Africa:

SAFINTRA
world class roofing systems

www.safintra.co.za / www.safintra.com

S-5!®

The Right Way

S-5-PV Kit and EdgeGrab™




The concept of combining photovoltaic arrays with standing seam metal roofing is growing—and for good reason. A standing seam metal roof has a life expectancy consistent with that of framed PV modules. A 30-year power source on a 40-year roof, along with zero-penetration technology, creates the most sustainable roof system for alternative power generation.

The S-5-PV Kit features a stainless steel mounting disk with twelve nodes designed to ensure the module-to-module conductivity of anodized aluminum module frames. This means the module is simply anchored with the kit and is automatically bonded. No lugs or wire are required except to connect one string of modules to another and to ground the system. This results in significant savings in installation time and materials, sufficient to pay for the entire S-5-PV Kit and clamp setup.

S-5! PV kits have an M8 bolt and are suitable for use with all S-5! clamps.

The right way to attach almost anything to metal roofs!

S-5-PV Kit and EdgeGrab™

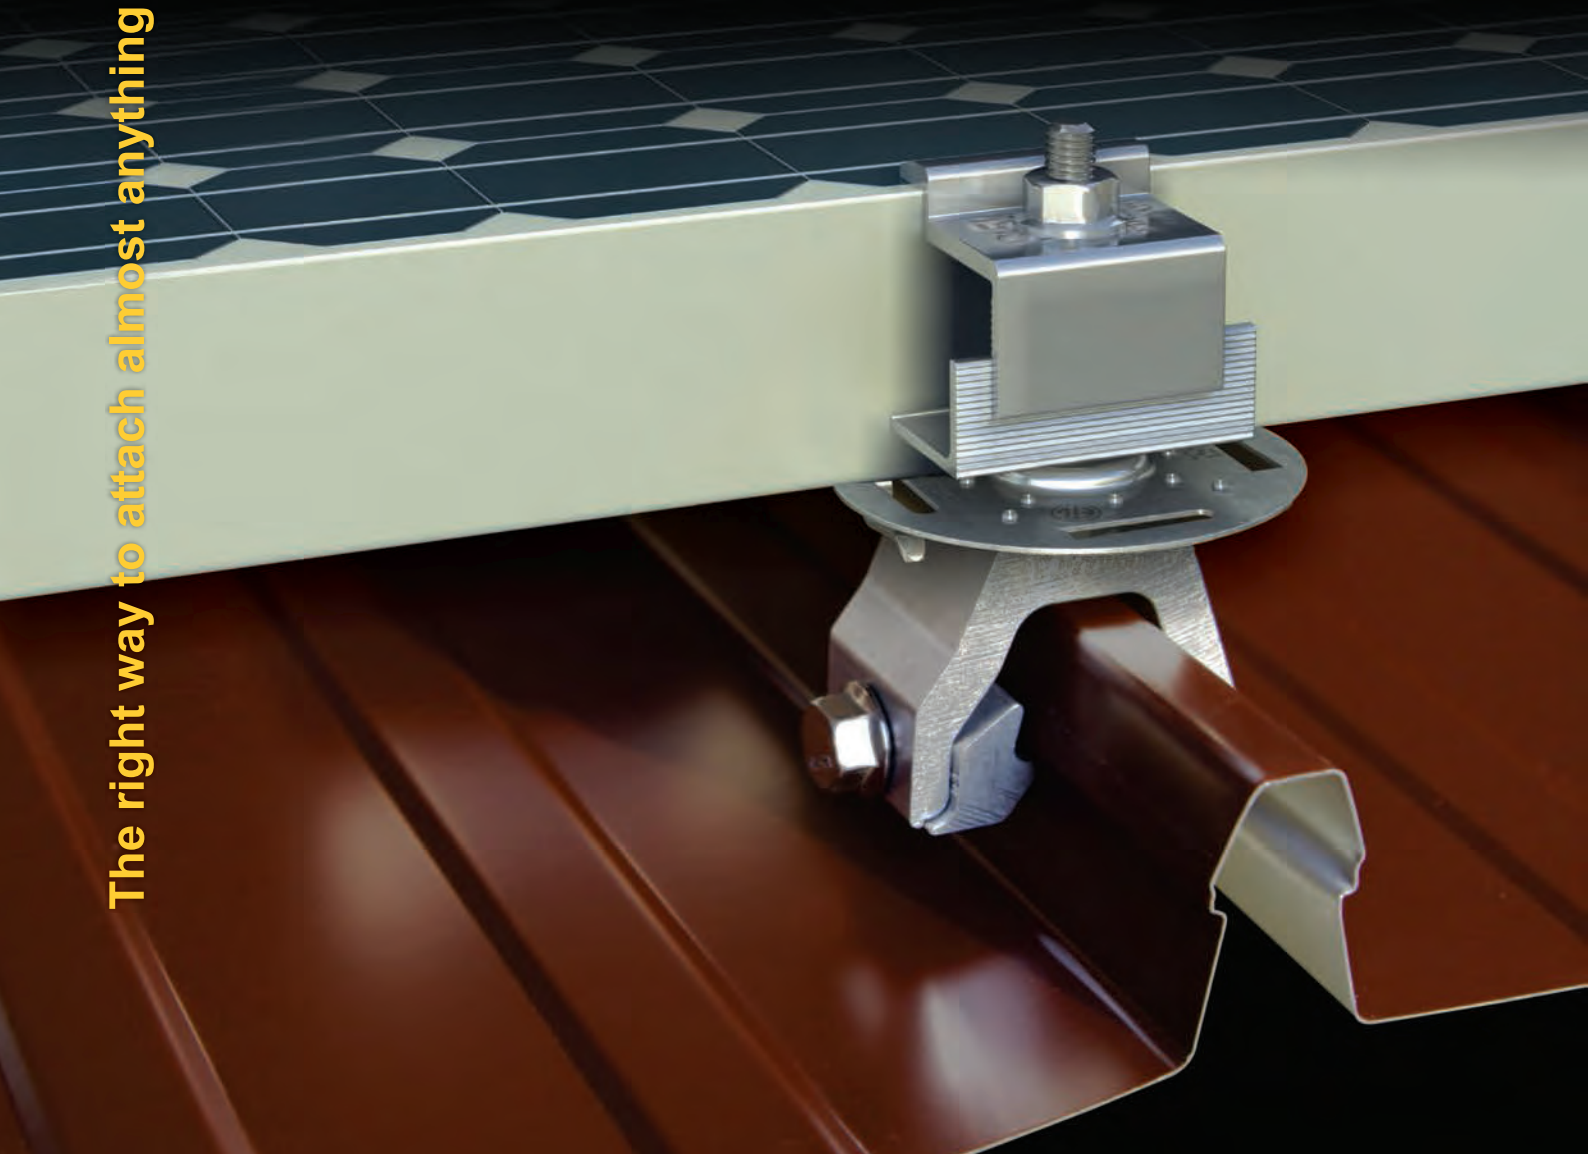

The S-5-PV Kit is a revolutionary new solution to attach solar PV panels to standing seam metal roofs!

The S-5-PV Kit continues to be the easiest, most cost-effective way to install solar panels directly to standing seam metal roofs, remaining the most popular choice worldwide.

The embossed panel guide makes the module placement easier. The mounting disk is multi directional and rails are not required.

Four strategically placed under-disk hooks assist in wire management. The PV grab ears that hold the solar panel in place are broader to allow for ease of installation and precise module engagement.

Accommodating module thicknesses between 30 and 51mm, the S-5-PV Kit fits the majority of solar panels on the market. Using the S-5! mini clamps, it fits most standing seam metal roofs. When paired with other S-5! products, the S-5-PV Kit and EdgeGrab will also work on most exposed-fastened metal roofs. The standard grab is designed to fit field conditions (two adjacent panels), while the EdgeGrab is designed specifically for end conditions.


Wind dynamics are complex; thus, each system should be reviewed by a qualified licensed professional who understands wind effects on metal roof design and construction prior to purchase and installation. For more detailed information including specifications, installation instructions, and CAD drawings, visit www.S-5.com or Safintra SA, www.safintra.co.za.

The **S-5-PV Kit** is furnished with the hardware shown at right, excluding the attachment clamp, which is supplied separately. The S-5-PV Kit is compatible with most common metal roofing materials, including brass. The S-5!® **EdgeGrab™** and S-5-PV Kit together accommodate PV frame thicknesses 30–48 mm (if the L-flange is positioned below the stud's hex nut) and 34–51 mm (if the L-flange is positioned above the stud's hex nut).*


Listed to UL subject 2703.
ETL Listed to UL 1703.*



S-5-PV Kit™ with Mid-Grab

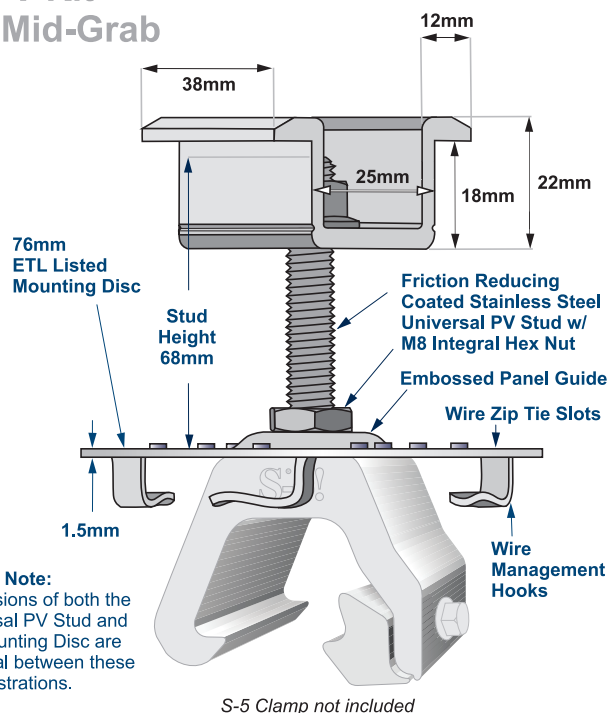


S-5-PV Kit™ with Edge-Grab

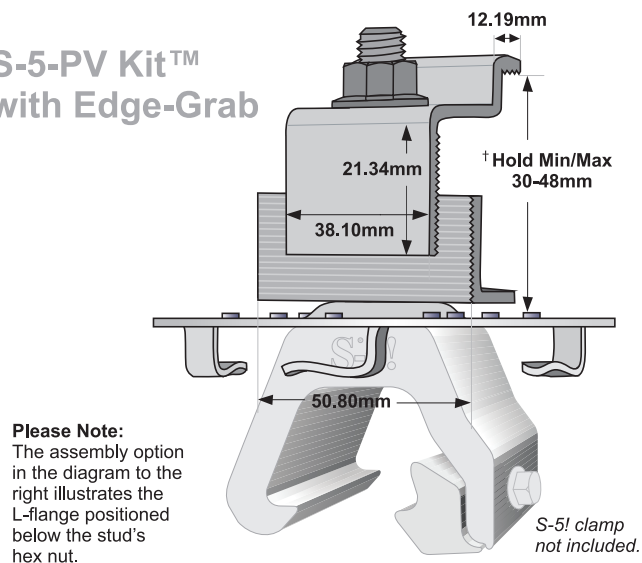

Please note: All measurements are rounded to the second decimal place

* Patents pending.

Due to the variety of attachment needs, S-5-PV Kits are sold separately from S-5! mini clamps.

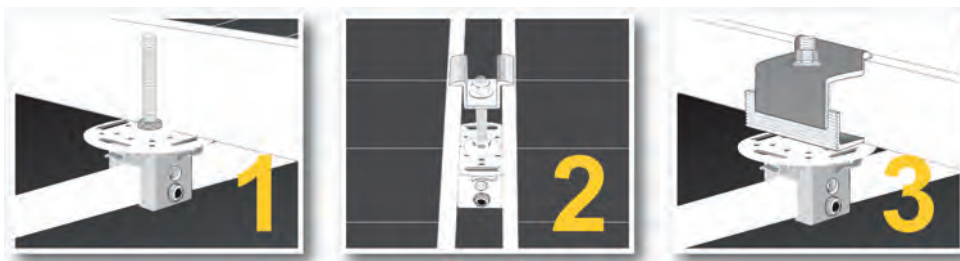

S-5!® Warning! Please use this product responsibly!

S-5! Brackets and clamps are not tested for performance as part of a Fall Arrest or Personal Safety system. These applications need to be tested as a dynamic system and warranties or test results must be issued by the system provider. Safintra, Safal Group and its subsidiaries provide no warranties or any assurances in this application, and will accept no claims of any nature whatsoever arising out of any such applications.

Products are protected by multiple international patents. For published data regarding holding strength, bolt torque, patents and trademarks visit the S-5! website at www.S-5.com.

Copyright 2013, Metal Roof Innovations, Ltd. S-5! products are patent protected. S-5! Aggressively protects its patents, trademarks and copyrights.

Published December 2015

Sole Agents for Africa:

SAFINTRA
world class roofing systems

www.safintra.co.za / www.safintra.com

A WORLD CLASS ROOF NEEDS WORLD CLASS MATERIAL

ZincAL® is manufactured using a patented Aluminium-Zinc coating alloy recognised as being the most technologically advanced metallic coating in use worldwide.

When used in the correct application, ZincAL offers you:

- Considerable increase in service life
- Distinctive aesthetic appeal
- Superior thermal performance




For Increased Service Life

Passivation

AZ Coating

Low Carbon Steel

• Cross section of ZincAL®

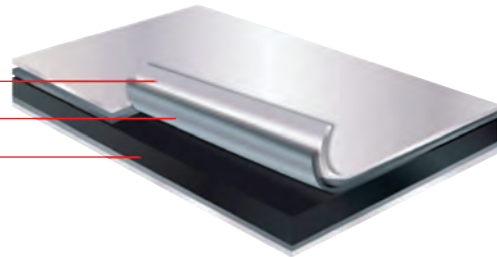

The coating alloy consists of 55% Aluminium, 43,5% Zinc and 1.5% Silicon. Their combined action in a metallic alloy coating increases the service life of the steel core by up to 4 times that of traditional zinc galvanised steel with the same coating thickness in the same physical environment.



For Aesthetic Appeal

Top Coat

Corrosion Inhibitive Primer


Pre-treatment

ZincAL®

Pre-treatment

Backing Coat - Cool Grey

• Cross section of COLORPLUS®

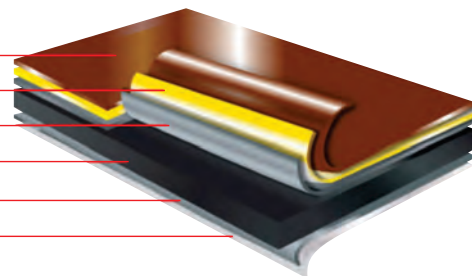

ColorPlus® is a factory pre-painted product, with colour applied over a ZincAL substrate, offering all the advantages of ZincAL with the option of colour for added aesthetic appeal.

The ColorPlus paint system has been carefully selected to endure the harsh African climate, and resist dirt or contaminant retention, so that the surface stays clean and the colour is fresh looking for as long as possible.


• **COLORPLUS® is available in the following standard colours:**



Non-standard colours are available at the discretion of the mill, with minimum order quantities and extended lead times.

Superior Thermal Performance

Less heat transmitted into building interior, giving cooler interiors in hot climates.

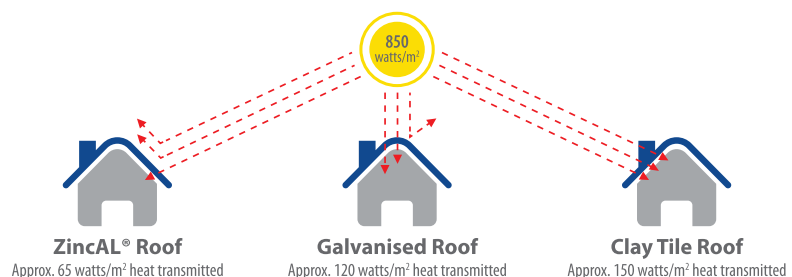

Both ZincAL and ColorPlus are proudly manufactured in South Africa by:

ZincAL® and ColorPlus® are registered trademarks of the:

Technical Data AZ Technology vs. GI Technology

Version 2/2014

Steel is an important part of economic activity in most countries. Its use extends to almost all sectors of the economy, such as Engineering, Construction, Railways, Shipbuilding, Automotive and Consumer Goods. Steel does however have an inherent weakness in that when used unprotected and exposed to the environment, it corrodes very easily. To extend the service life of steel, it is generally coated with a corrosion inhibiting coating. The 2 most commonly used coatings to protect steel are:

- **Aluminium Zinc Coating (AZ)**
- **Galvanised Coating (GI)**

Aluminium Zinc Coating

The mild steel substrate is continuously hot dipped in a formulation of Aluminium (55%), Zinc (43.5%) and Silicon (1.5%). The combination of Aluminium and Zinc increases the sacrificial properties therefore extending the service life span of a steel roof by up to 4 times that of galvanised steel. The Aluminium components of the coating provide a tough physical barrier between the extreme atmospheric conditions and the inner core of steel. The Zinc in the coating protects the steel where exposed. Aluminium Zinc coating is a patented coating technology. Legitimate producers are registered with the license authority BIEC.

Galvanised Coating

The mild steel substrate is continuously hot dipped in an almost pure Zinc formulation. Zinc has inherent sacrificial properties and corrodes first before the mild steel core. Galvanising offers almost twice the service life of the steel substrate. A unique shiny spangle appearance gives galvanised steel its signature in the market.

Coating Comparison

| AZ Coating weight g/m ² | Nominal AZ Coating Thickness/microns | GI Coating weight g/m ² | Nominal GI Coating Thickness/microns |
|------------------------------------|--------------------------------------|------------------------------------|--------------------------------------|
| AZ100 | 27 | Z200 | 27 |
| AZ150 | 40.5 | Z275 | 40.5 |
| AZ200 | 54 | Z350 | 54 |

* The higher aluminium content in the coating alloy results in a lower density

* AZ offers an increase in service life up to 4x longer

* Please note coating thickness under AZ100 or Z200 is not recommended for coastal or heavy industry applications

* Micron count is approximate

| AZ Coating | GI Coating |
|-------------------------------|-------------------------------|
| Continuous Hot Dipped process | Continuous Hot Dipped process |
| 55% Aluminium | 0.2% Aluminium |
| 43.5% Zinc | 99.7% Zinc |
| 1.5% Silicon | - |
| Balance % trace elements | Balance % trace elements |





Continued





A member of the Safal Group

Safal Steel (Pty) Ltd is a licensed producer of AZ Coated Products - Manufactured under license to BEIC International Inc.
Tel: +27 31 782 5500 | Fax: +27 31 782 1400 | www.safalsteel.co.za

Technical Data AZ Technology vs. GI Technology

Product Comparison Continued

| AZ Coating | GI Coating |
|---|---|
| Superior corrosion resistance:
Aluminium offers barrier protection
Zinc offers sacrificial protection
*AZ150 after 240 hours of salt spray testing - no signs of deterioration  | Medium corrosion resistance:
Zinc offers sacrificial protection
*Z275 after 240 hours of salt spray testing - signs of red dust appear  |
| Excellent heat reflectivity:
<i>Roofing applications:</i> creates a cooler internal temperature in summer and a warmer temperature in winter due to reflection
<i>Appliance application:</i> AZ increases the appliances efficiency therefore lower energy consumption | Moderate heat reflectivity:
Due to low reflection values the heat loss is greater creating a hotter internal temperature in summer and a colder temperature in winter. |
| Heat Resistance:
AZ can reach temperatures up to 675°C
Product can be used up to 315°C before discolouration | Heat Resistance:
GI can reach temperatures up to 480°C
Product can be used up to 400°C before discolouration |
| Superior cut edge protection | Superior cut edge protection |
| Superior formability | Superior formability |
| Superior weld ability: generates less zinc fumes | Medium weld ability |
| Small, uniform unique spangle  | Medium/large irregular spangle  |
| Silver, white in colour | Silver, grey in colour |
| Matte finish | Shiny, bright finish |

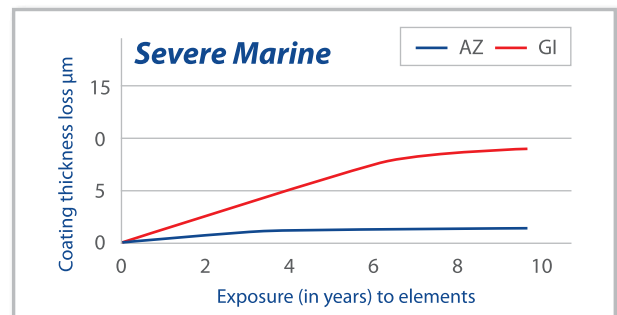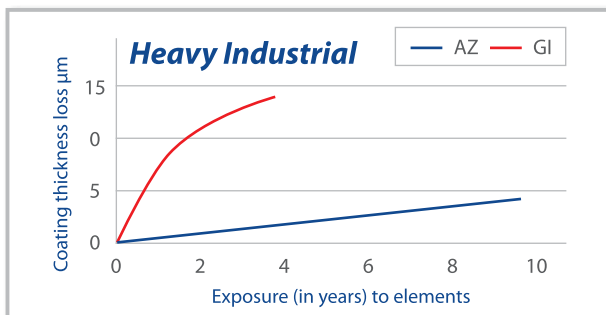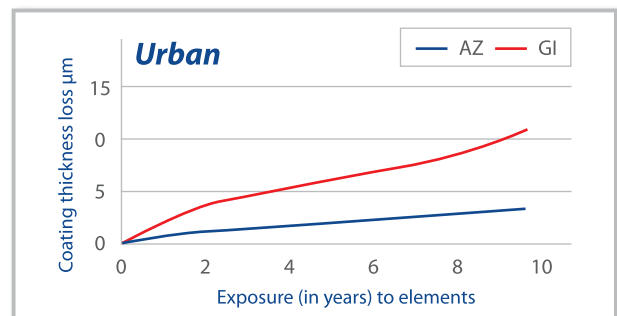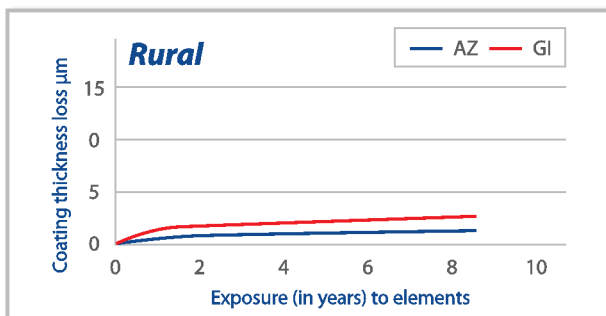

Graphs replicated from BIEC International Inc.

A member of the Safal Group

Safal Steel (Pty) Ltd is a licensed producer of AZ Coated Products - Manufactured under license to BEIC International Inc.
 Tel: +27 31 782 5500 | Fax: +27 31 782 1400 | www.safalsteel.co.za

MAKING ROOFS WORK SMARTER




S-5! CorruBracket™ for corrugated profiles



S-5! TrapBracket™ for trapezoidal profiles



S-5-K Grip™ for Saflok and similar concealed fix systems

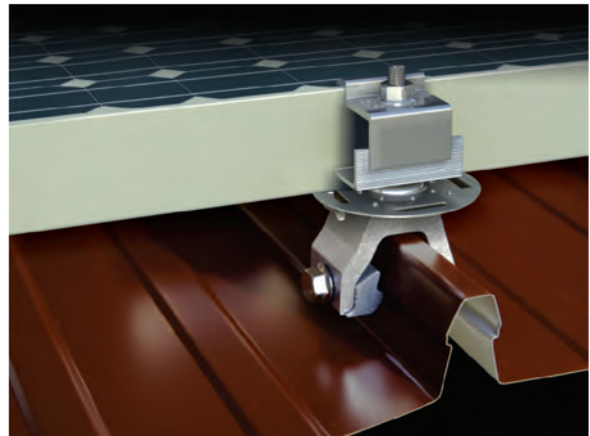

S-5-PV Kit™ for solar module attachment

S-5!® is the right way to attach almost anything to metal roofs:

- Non-penetrating clamps for concealed fix systems preserves sheeting warranties
- Profile-specific attachment brackets for all pierced fix sheets
- Engineered for attachment of PV panels, walkways, HVAC, safety rails, signage and more

S-5 clamps offer:

- High tensile aluminium and non-ferrous stainless steel hardware
- Material compatibility with aluminium-zinc coated steel
- 25-year manufacturer's warranty on all product components
- Unequalled holding strength, average load-to-failure of 1000kg

SAFINTRA SOUTH AFRICA: www.safintra.co.za Email: info@safintra.co.za

JOHANNESBURG

4 Fobian Street, Hughes Ext. 31, Boksburg, South Africa
P.O. Box 26060, East Rand, 1462, South Africa
Tel: 0861 SAFJHB (723 542)
Fax: (011) 823 4288

PORT ELIZABETH

253 Grahamstown Road, Deal Party, Port Elizabeth, South Africa
P.O. Box 27825, Green Acres, 6057, South Africa
Tel: (041) 486 2791
Fax: (041) 486 3472

CAPE TOWN

Goud Crescent, Mida Park, Brackenfell, South Africa
P.O. Box 1690, Brackenfell, 7561, South Africa
Tel: (021) 981 3130
Fax: (021) 982 2248

POLOKWANE

Unit F53/12, Seshego Industrial Park, Polokwane, South Africa
P.O. Box 55748, Polokwane, 0700, South Africa
Tel: (015) 223 1009
Fax: (015) 223 0122

DURBAN

30 Lanner Road, New Germany, Durban, South Africa
P.O. Box 968, New Germany, 3620, South Africa
Tel: (031) 713 3600
Fax: (031) 705 4564

NELSPRUIT

10 Water Lily Street, Riverside, Industrial Ext. 12
Nelspruit, South Africa
P.O. Box 13519, Nelspruit, 1200, South Africa
Tel: (013) 750 2060
Fax: (013) 757 0412

BLOEMFONTEIN

14 Kraal Street, East End, Bloemfontein, South Africa
Tel: (051) 072 0013
Fax: 086 650 2403

FULL SERVICES ALSO OFFERED IN:

Namibia
Botswana
Zimbabwe

Safintra is part of The Safal Group, the largest steel roofing company in Africa. Perhaps more importantly, we are also the longest established group in our field - speaking volumes about the depth of our commitment to our clients, and our pride in what we do.



Making a World of Difference



Angola:
Gainvest SARL



Rwanda:
Safintra Rwanda Ltd



Burundi:
Safintra Burundi Ltd



South Africa:
Safintra South Africa (Pty) Ltd
Safal Steel (Pty) Ltd



Ethiopia:
Ethiopian Steel PLC



Tanzania:
Alaf Ltd, Tanzania



Kenya:
Mabati Rolling Mills Ltd
Insteel Ltd
Safal MiTek Ltd



Uganda:
Uganda Baati Ltd



Malawi:
Steel Supplies Malawi Ltd



Zambia:
Safintra Zambia Ltd



Mozambique:
Safintra Mozambique LDA



Namibia
Safintra Namibia Ltd

For more information please visit: www.safalgroup.com or www.safintra.com