
### **TECHNICRETE**

## Grassframe

The most engineered yet simple hardlawn paving

**Technicrete Grassframe** allows the natural greening of paved surfaces to form hard wearing grassed driveways, roadways, footpaths and parking areas. **Technicrete Grassframe** paving is simple to maintain using conventional lawn maintenance techniques.

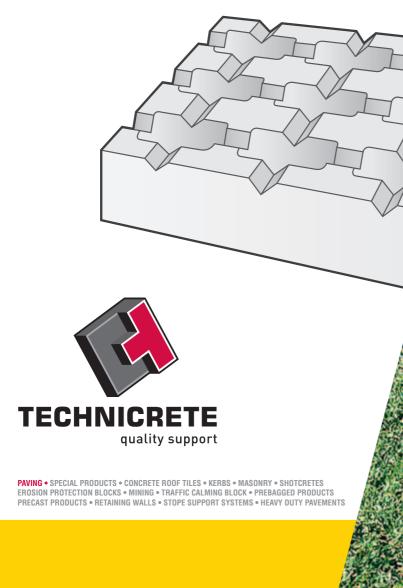


## **TECHNICRETE**

# **Concrete Grassframe**


the most engineered yet simple hardlawn paving

### • LAYING DETAIL



Block hand compacted into bedding sand using a rubber mallet.

River sand bedding (recommend 10mm to 15mm thick)

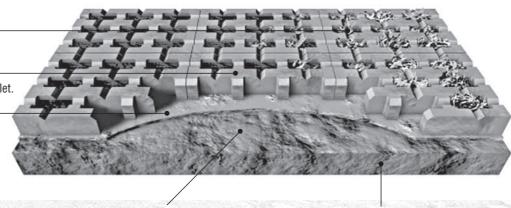

Surface of layer works to standard specifications SABS 1200 MJ. (max. 10mm in 3m)

Earthworks designed to suit traffic loading

### Colours shown on front may vary from the true colour due to the printing process.

General	Thickness	Length/	No. Blocks	Block Mass	Colours
Application	Available	Width	p/m²	p/m²	available
Driveways, roadways, striproads, pathways and parking areas. Embankment & light duty erosion protection.	100mm 95mm 90mm	600 x 400 600 x 400 600 x 400	4.17 4.17 4.17	137kg 130kg 123kg	

Technicrete reserves the right to change or amend the contents of this document at anytime without any notice with this document intended for general information only.

Any specific information required about product specifications, applications, technical information, sales conditions, warranties and guarantees as required for any design or installation should be obtained from Technicrete.



#### **Technicrete House**

Cnr. Main Reef Road & Houtkapper Street, Roodepoort, 1725 Tel: 011 674 6900 – Fax: 011 672 1425 Email: info@technicrete.co.za www.technicrete.co.za 0861 266267

Branches:

Carletonville: 018 790-4380 Stilfontein: 018 484-3089 White River: 013 750-0319 Olifantsfontein: 011 203-7700 Polokwane: 015 298-8083 Welkom: 057 391-4200 Witbank: 013 696-1153