


# Kwik Sol

SOLAR WATER HEATING

**DIRECT**

SYSTEM FOR FROST-FREE LOCATIONS

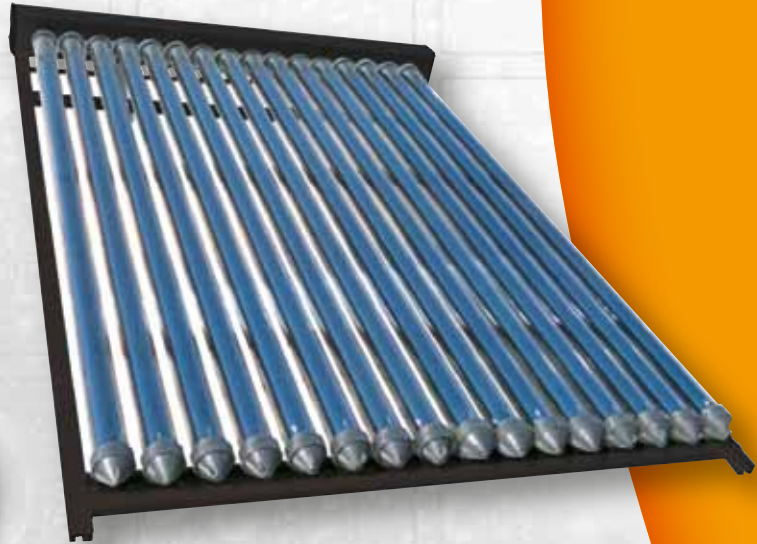

EFFICIENT USE OF NATURAL  
SOLAR ENERGY FROM THE

# SUN

DOMESTIC SOLAR WATER HEATERS, SOLAR COLLECTOR PANELS & SOLAR VACUUM TUBES



## Solar Water Heaters - Close Coupled & Split - Direct System

### direct system

This direct system is used in frost-free locations, where the ambient temperature never falls below 5°C and where the water quality is good (less than 600ppm Total Dissolved Solids/Minerals).

The direct system, is where the water to be used in the household (hot water) circulates through the solar collector panels, or solar vacuum tubes manifold, transferring solar energy into the storage tank of the solar water heater.

The direct system can be installed as a Split System (pumped or thermosyphoned circulation methods), where the solar water heater is installed inside the roof or away from the solar collector panels or solar vacuum tubes, or installed as a Close Coupled System (thermosyphon circulation), where the solar water heater is installed outside on the roof and above or higher than the solar collector panels or solar vacuum tubes (see section Circulation Methods).

### solar water heater product features

- The Kwikot Kwiksol Solar Water Heater Direct System complies with SANS 1307, is SABS **400kPa** approved and can be used as a close coupled system or split system.
- The inner cylinder is manufactured from 2mm steel and thermo fused porcelain enamelled for cylinder longevity and hygiene.
- Polyurethane insulation between the inner cylinder and outer casement reduces energy and heat loss.
- 2x aluminium sacrificial anodes are fitted for corrosion protection.
- The solar water heater is designed for domestic hot water application in conjunction with one or more solar collector panels or solar vacuum tubes.
- The two extra water connections required for connecting solar collector panels or connecting the manifold above the solar vacuum tubes, and the booster element, ensures that the solar water heater can be used as a conventional electric water heater and as a solar water heater.
- The solar water heater thermostat will automatically switch on when the incoming hot water from the solar collector panels or from the manifold above the solar vacuum tubes, has not reached the set temperature setting on the thermostat. This will occur on cloudy days and at night when the water temperature drops in the solar water heater or when hot water is drawn off and cold water enters the solar water heater.

### solar water heater product specification data

Capacity (Litres)	Element Rating (Kw)	Operating Pressure (kPa)	Mass Empty (kg)	Water Connections (BSP Male)	Solar Connections (BSP Male)
150	2	Up to 400	42	¾"	¾"
200	2	Up to 400	52	¾"	¾"
250	2	Up to 400	63	¾"	¾"

Product Code	Capacity (Litres)	Dimension A (mm)	Dimension B (mm)
SOL - 150 - DIR	150	1070	594
SOL - 200 - DIR	200	1360	594
SOL - 250 - DIR	250	1650	594

The diagram shows a side view of the solar water heater. Dimension A is the length of the unit, and Dimension B is the height. The unit is shown with its mounting feet and various connection points.

### product installation data

- Where the solar water heater is installed in the roof, it must be installed in compliance with SANS 10106 Solar Water Heater Specification complete with a Temperature & Pressure Valve (Safety Valve), Drain Cock (both supplied with the solar water heater), Multi Pressure Control Valve **400kPa**, Drip Tray and Kwikot Vacuum Breakers on the cold water supply and hot water supply.
- If the solar water heater is installed in the roof, the following minimum installation clearance must be allowed for on each side of the solar water heater in order to remove the element or thermostat and the anode/s from the opposite end:  
150lt – 450mm  
200lt/250lt – 920mm
- If the solar water heater is installed on the roof, careful inspection must be carried out to ensure that the roof can support the weight of the entire installation system once it is filled with water. Care must be taken where the front feet of the solar water heater are located. The feet should be located over a tile batten, purlin or similar for maximum strength.

## product warranty and anode servicing

The period of warranty is from the date of installation providing that documented proof of installation is furnished, or alternatively from date of manufacture as determined from the serial plate code on the solar water heater.

- One year on the heating element, thermostat, flange assembly plate and gasket.
- Two years on the Safety Valve and Drain Cock.
- Five Years on the inner cylinder, subject to water conditions equivalent to main Metropolitan supply authorities. This warranty is subject to only genuine Kwikot replacement parts (heating element and thermostat etc) being used whilst the inner cylinder is still under guarantee.
- The warranty on the installation is the responsibility of the installer. Water specification and Anode servicing/replacement is as follows:

Total Dissolved Solids (Parts per Million)	Recommended Anode Replacement
100-600	3 Years
601-1000	2 Years
Over 1000	1 Year



# Kwiksol

Solar Collector Panels


## solar collector panel product features

- Manufactured with an aluminium frame, 4mm toughened prismatic, non-reflective, anti-hail tempered glass.
- Durable copper waterway tubes.
- Rubber seals ensure durability and reliability in extreme climatic conditions.
- Semi-selective black chrome surface on copper substrate offering maximum absorption efficiency
- Working Pressure up to **400kPa**
- Total and useful energy rating 4.19kWh/m<sup>2</sup>

Product Code	Dimensions (mm)	Aperture Area (m <sup>2</sup> )	Mass Empty (kg)	Mass Full (kg)	Energy Transfer Fluid
SOL - PANEL - 2	2000 x 1000 x 80	2	30	32	Water
SOL - PANEL - 2B	2000 x 1000 x 80	2	30	32	Water
SOL - PANEL - 2.5	2500 x 1000 x 80	2.5	40	46	Water

Solar Water Heater Capacity (Its)	Number of Solar Collector Panels (m <sup>2</sup> )
150	1 x 2m Panel
200	1 x 2.5m Panel
250	2 x 2m Panels

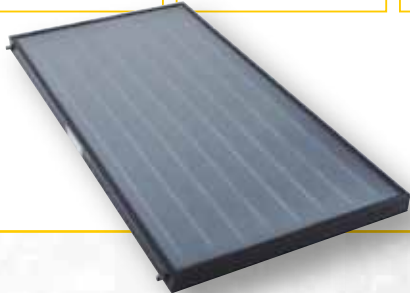


# Kwiksol

Solar Vacuum Tubes

## solar vacuum tubes features

- The Kwiksol Solar Vacuum Tubes consist of two glass tubes manufactured from borosilicate glass.
- The outer glass tube is transparent allowing light rays to pass through it with minimum reflection.
- The inner glass tube is coated with a solar special selective coating (Al-N/A1), which provides excellent solar radiation absorption.
- The top of the two vacuum tubes are fused together and the air is extracted, which forms a vacuum and is key to the efficiency of the vacuum tubes.
- To maintain the vacuum between the two vacuum tubes, a barium getter is used. The barium layer also provides a clear visual indication of the vacuum status. The silver coating will turn white if the vacuum is ever lost.
- Anodized Aluminium frame and manifold.
- Working pressure up to **600kPa**

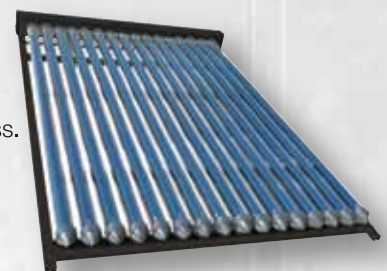

Solar Water Heater Capacity (Its)	Array (number of Vacuum Tubes)	Tube Dimensions Length x height(mm)	Absorbing Area (m <sup>2</sup> )	Mass Empty (kg)	Mass Full (kg)	Energy Transfer Fluid
150	16 (2 x 8)	1800 x 58	1.6	48	49	Water
200	20 (2 x 10)	1800 x 58	1.9	62	64	Water
250	24 (2 x 12)	1800 x 58	2.2	80	82	Water




## product installation data

### Roof Location and Pitch

- For optimum performance the solar collector panels or array of vacuum tubes need to face the equator (facing north for southern hemisphere installations). Installation on angles of up to 45° away from the equator do not have a major effect on the annual solar output, consequently roof locations which face less than 45° away from the equator are acceptable. Solar irradiance from the sun begins at about 10:00 until about 16:00 and at its peak between 12:00 and 14:00
- If the solar collector panels or array of vacuum tubes are installed with an east facing bias, the best solar capture is best achieved in the morning, and if installed with west facing biased, in the afternoon.
- The location should not be subject to excessive shading from trees and adjacent buildings and particularly between 9am and 15:00. Remember that shadows are longer in winter than in summer so a location that is free of shadows in summer may have some shadows in winter.
- The solar collector panels or array of vacuum tubes should be installed on a roof pitch greater than 8° and less than 30°. Where the roof pitch is greater than 30°, the installation will require additional support to prevent it from moving downwards when installing and after installing. If the solar water heater is mounted on the roof above the solar collector panels or array of vacuum tubes, additional support for the solar collector panels can be made at the solar water heater. If the roof pitch is less than 8°, the installation will require a mounting frame to increase the pitch to above 8°.

**Installations below 8° do not thermosyphon effectively and the solar collector panel glass will not clean properly when it rains.**

- If the solar water heater is installed on the roof, careful inspection must be carried out to ensure that the roof can support the weight of the entire installation system once it is filled with water.

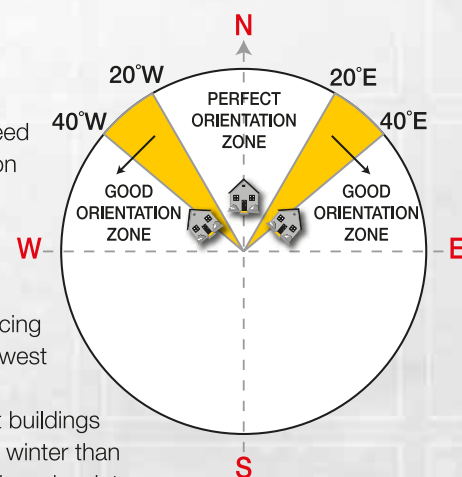

## product warranty

The solar collector panel and vacuum tubes including the frame and manifold have a comprehensive 5 year warranty from date of installation and subject to the following conditions:

- The warranty only applies to defects, which have arisen solely due to faulty materials and workmanship during the manufacturing process of the solar collector panel, vacuum tubes, frame and manifold.
- If any component fails during the warranty period, Kwikot will replace or repair the failed component free of charge.
- Any damage caused to the solar collector panel due to propylene glycol not being used in an indirect system, is not covered by the warranty.
- The solar collector glass and the vacuum tube glass are not covered by the warranty.
- The warranty on the installation is the responsibility of the installer.



## circulation methods

**Only use Propylene Glycol Heat Transfer Fluid in both circulation methods.**

### 1. Pump Circulation in a Split System



- It is not always possible or convenient to place the solar water heater in a higher position than the solar collector panels or array of vacuum tubes. A circulating pump, controlled by an electronic control unit, therefore becomes necessary. The control unit using two sensors constantly monitors the temperature of the solar collector panels, or the temperature of the manifold for the vacuum tubes and the solar water heater, powering the circulation pump only when the propylene glycol transfer fluid in the solar collector panels is hotter than the water in the solar water heater.
- When the temperature difference is less than the set point during the working process of the circulating pump, the pump will stop.
- When the temperature of the water in the solar water heater reaches the highest set point, the controller will stop the circulating pump.
- The electrical thermostat and element will automatically maintain the water temperature of the upper part of the solar water heater.
- The set temperature on the thermostat must be lower than the maximum temperature attainable on the solar collector panels.
- The circulating pump must be installed in accordance with the manufacturers instructions and ease of access for maintenance/repair.
- Split systems can also be installed as thermosyphon systems, if there is sufficient roof space to locate the solar water heater above the solar collector panels or solar vacuum tubes (see installation diagram on back page).
- A 12V solar circulating pump can also be used, powered by a photovoltaic collector panel.

Pump Circulation Split System

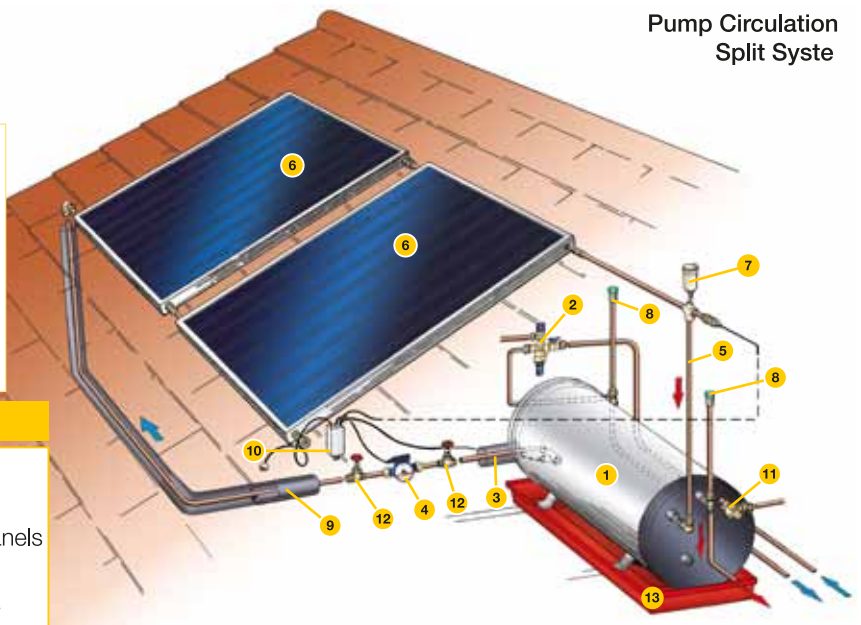


## Product Description

- |    |   |
|----|---|
| 1  | Solar Water Heater Direct                 |
| 2  | Multi Pressure Control Valve 400kPa       |
| 3  | Cold Water Feed to Solar Collector Panels |
| 4  | Electrical Circulating Pump               |
| 5  | Hot Water Feed to Solar Water Heater      |
| 6  | Solar Collector Panels                    |
| 7  | Auto Vent Valve                           |
| 8  | Kwikot Vacuum Breaker                     |
| 9  | Thermal Pipe Lagging                      |
| 10 | Differential Thermostat                   |
| 11 | Kwikot Safety Valve 400kPa                |
| 12 | Gate Valve                                |
| 13 | Kwikot Drip Tray                          |

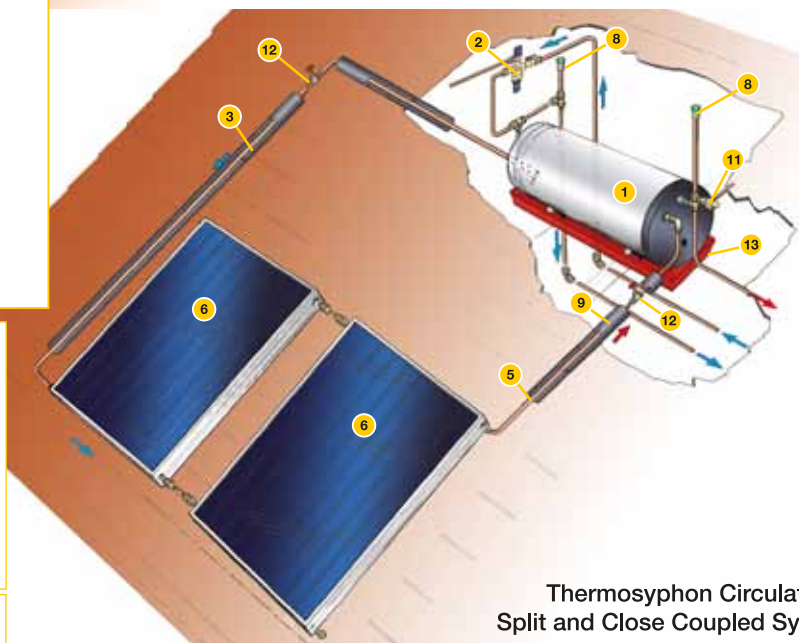

Thermosyphon Circulation Split and Close Coupled System



## 2. Thermosyphon Circulation in a Close Coupled and Split System

- The compulsory requirement for a thermosyphon system is that the solar water heater is placed in a position higher than the solar collector panels or solar vacuum tubes and circulation occurs without any moving parts or auxiliary electrical energy input to the system.
- This system operates according to a basic principle of physics: a liquid, if heated, becomes less dense and rises upwards.
- Heated water in the solar collector panels or heated water in the vacuum tube manifold rises up into the solar water heater and displaces cold water, which travels back down to the solar collector panels or vacuum tube manifold.
- When there is no solar radiation, the water in the solar collector panels or in the vacuum tube manifold, which becomes heavy, blocks the circulation and prevents the heat accumulated in the solar water heater from being dispersed.

## solar installation components & accessories

Product Code	Description
SOL-BRCT-RB SOL-BRCT-150 SOL-BRCT-200 SOL-BRCT-250	<b>Mounting Brackets &amp; Supports</b> Roof Mounting Bracket for Solar Collector Panel (all sizes) Pitch Roof Support for 150lt Solar Water Heater and Panel Pitch Roof Support for 200lt Solar Water Heater and Panel Pitch Roof Support for 250lt Solar Water Heater and Panels
SOL-FRM-150 SOL-FRM-200 SOL-FRM-250	<b>Frames</b> Flat Roof Frame for 150lt Solar Water Heater and Panel Flat Roof Frame for 200lt Solar Water Heater and Panel Flat Roof Frame for 250lt Solar Water Heater and Panels
KH4.500	<b>Air Release Valves</b> Auto Vent Valve (UV Resistant)
KHN4.150CX KHN4.200CX	<b>Vacuum Breakers</b> Kwikot Vacuum Breakers 15mm Kwikot Vacuum Breakers 22mm
SOL-PG-1	<b>Heat Transfer Fluid</b> Kwiksol Propylene Glycol Ilt (dilution mix: 1 part Glycol to 3 parts water)
SOL-PPUMP-12 SOL-PANEL-12 IND-CPN-25-4-BR	<b>Circulating Pumps &amp; Solar Photovoltaic Panel</b> 1. Solar Circulating Plastic Pump 12V 2. Solar Mono Crystallite Panel 10 Watt 3. Electrical Circulating Pump 220V
SOL-CTR-1 SOL-CTR-BAT SOL-CTR-2 SOL-CTR-4	<b>Control Timers</b> 1. Geyser Wise Control/Timer for Electrical & Circulating Pump 12V 2. Replacement Battery for Geyser Wise Control Timer 3. Solar Control Timer AX for Electrical Circulating Pump 4. Solar Control Timer BS/3 for Electrical Circulating Pump
SOL-LAG-15 SOL-LAG-22	<b>Thermal Pipe Lagging (Insulation)</b> 1. High Temperature Lagging 15mm x 1.8m 2. High Temperature Lagging 22mm x 1.8m



### kwikot branch and website addresses:

#### kwikot (pty) ltd inland division

PO Box 1016 Benoni 1500  
Tel: (011) 897 4600  
Fax: (011) 914 4750  
**Domestic Sales**  
email: sales.inland@kwikot.com  
**AFTER SALES SERVICE TEL:**  
0861 KWIKOT (594568)  
**Export Sales:**  
email: sales.export@kwikot.com  
**Marketing:**  
email: marketing.info@kwikot.com  
**Technical:**  
email: solar.info@kwikot.com

#### kwikot (pty) ltd eastern cape division

PO Box 3082 Northend, Port Elizabeth, 6056  
Tel: (041) 373 0575  
Fax: (041) 373 0577  
**Domestic Sales**  
Email: sales.easterncape@kwikot.com

#### kwikot (pty) ltd western cape division

PO Box 443, Eppindust, 7475  
Tel: (021) 534 3691  
Fax: (021) 534 1606  
**Domestic Sales**  
Email: sales.westerncape@kwikot.com

#### kwikot (pty) ltd kwazulu-natal division

P O Box 47366, Greyville, 4023  
Tel: (031) 574 8700  
Fax: (031) 574 8750  
**Domestic Sales**  
email: sales.kwazulunatal@kwikot.com